


LIVING  
**NOW**
**Connected dimmer 2m**

**1. USE**

Connected switch without neutral with dimmer option, configured by default as ON/OFF.

Can be combined with one or more wireless lighting controls (dimmer mode can be activated from the Home + Control app).

For local or remote control of your lighting.

Supplied with an active power compensator (Cat. No. 0 401 49), mandatory to ensure optimum operation with commercially-available lamps. One compensator per lighting circuit is sufficient.

Easy to install in place of a standard switch in a box 40 mm deep (minimum).

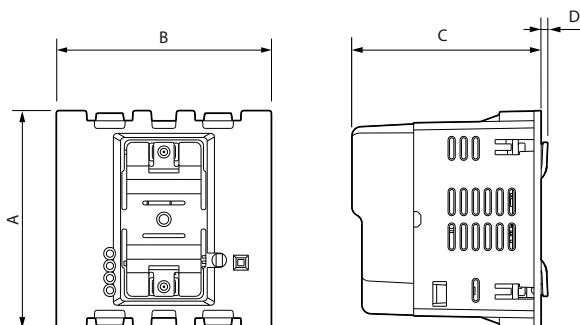
Claw and/or screw fixing.

**2. RANGE**

Designation	Cat. Nos.	Rated Cover code
For use in conjunction with the starter pack. Connected switch without neutral with dimmer option. With LED indicator (configuration) and RESET button (hidden) used to return to factory settings.	K4411CM2	<input type="checkbox"/> KW 33M2 <input type="checkbox"/> KM33M2 <input type="checkbox"/> KG33M2

**Colours code:**

- White
- Sand
- Black

**3. DIMENSIONS (mm)**


A	B	C	D
45	45	39	1.5

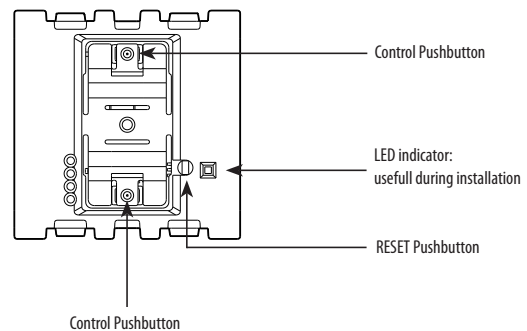
**4. CONNECTION**

Terminal type : screw

Terminal capacity: 2 x 1.5 mm<sup>2</sup> or 2 x 2.5 mm<sup>2</sup>

Stripping length:

8 mm flat screwdriver: 3 mm

**5. OPERATION**

**6. TECHNICAL CHARACTERISTICS**
**■ 6.1 Mechanical characteristics**

Protection against impacts: IK 04

Protection against solid bodies/liquids: IP 20 without plate and rocker-plate

**■ 6.2 Material characteristics**

Mechanism casing: PC

Halogen-free

UV resistant

Self-extinguishing:

+ 850°C/30 s for insulating parts holding live parts in place.

+ 650°C/30 s for the other insulating components.

## Connected dimmer 2m

## 6. TECHNICAL CHARACTERISTICS (continued)











## ■ 6.3 Electrical characteristics

Voltage: 100/240 V~

Power: 300 W

Frequency: 50/60 Hz

Standby consumption: &lt; 0.2 mW

		R	L			
			LED 			
						
240 V~	Max.	300 W	(*60 W)	60 W	300 VA	300 VA
	Min.	7 W	5 W	9 W	10 VA	35 VA
100 V~	Max.	150 W	(*30 W)	30 W	150 VA	150 VA
	Min.	7 W	5 W	9 W	10 VA	35 VA

(\*) Or 10 lamps max. For comfortable lighting, we recommend using bulbs of the same type and make.

(\*\*) The ferromagnetic transformers must be charged to more than 60% of their power. When calculating the permissible power, the ferromagnetic transformer efficiency must be taken into account. A load must be connected before programming and using the product.

**Zigbee technology** 2.4 GHz to 2.4835 GHz

Power level: &lt; 100 mW

Range: 200 m of unobstructed space

10 m between products indoors

## 7. CARE

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Resistant to the following products: Hexane (EN 60669-1), methylated spirit, soapy water, diluted ammonia, bleach diluted to 10%, window-

**Caution:** Always test before using special cleaning products.

cleaning products, pre-impregnated wipes.

The plates must not be painted.

## 9. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards.

See e-catalogue.

The undersigned, BTICINO, declares that the radio-electric equipment type (K4411CM2) complies with directive 2014/53/EU.

The full text of the EU declaration of conformity is available on the following website: [www.bticino.it/red](http://www.bticino.it/red)