



INTERIOR ACOUSTICS  
**ACCENT TILES**  
**DATASHEET**

**X**

**L**

**T**

**I**

**I**

**A**



## ACCENT CEILING TILE

Make a defining statement with Accent Ceiling Tiles, your creative approach to dynamic suspended ceilings that control reverberated sound whilst adding life to your office, school or commercial interior.

Developed with two functional sides for creative flexibility; Accent Ceiling Tiles have the added benefit of a smooth, classic white face combined with one of the exciting range of Autex Cube™ colours. Gain creative control over your ceiling space with the ability to mix-and-match colours to complement your environment.

Lightweight, easy and safe; Accent Ceiling Tiles are designed to fit into standard grid systems and comply to typical loading standards. Because these durable ceiling tiles are made from 100% polyester, they will not chip, crack or break, resulting in no wastage whilst installing.

### APPLICATIONS

- Offices, call centres and schools; especially open-plan areas
- Boardrooms and conference rooms
- Halls and auditoriums
- Libraries and administration buildings
- Retail stores and showrooms

### SPECIFICATION:


(Ceiling) treatment shall be Accent Ceiling Tiles from thermally bonded polyester containing not less than 45% recycled material as manufactured by Autex.  
[www.autexindustries.com](http://www.autexindustries.com)

Tile 595mm x 1195mm x 13mm depth, 23.4 x 47.0" x 1/2" depth, Colour (□) Suspended Square Edge, Sound absorption: Class A, NRC 0.85.  
Fire rating ISO9705: Classification: Group 1-S, AS ISO 9705 – 2003: Group 1, EN13501-1:2007+A1:2009: B – s2, d2, ASTM E-84: Class A, FS:0 - SD:10.

Install as per Autex recommendations. If Accent Ceiling Tiles are to be specified for use other than as a ceiling tile, please seek guidance from your Account Manager.



## ABSORPTION COEFFICIENT ACCORDING TO ISO 354.

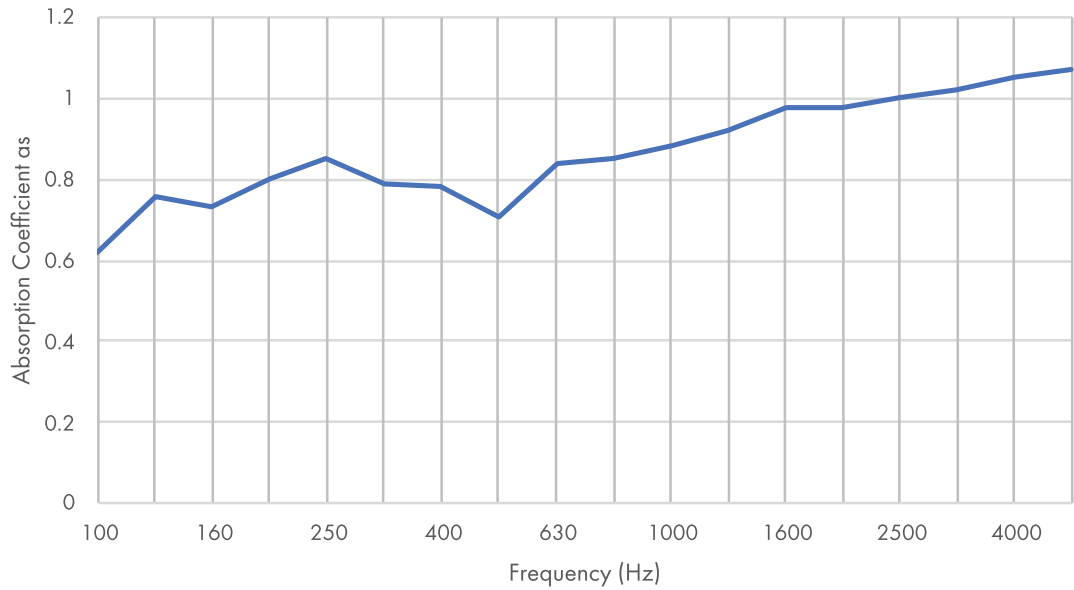

Frequency (Hz)	University of Auckland Test Report Number	125	250	500	1000	2000	4000	NRC
Accent Ceiling Tiles 13mm 400mm Airgap	T1632-2	0.70	0.80	0.80	0.90	1.00	1.05	<b>0.85</b>

Table presents the practical sound absorption coefficients as according to ISO 11654. Graph presents third octave sound absorption coefficients (According to ISO 354 Measurement of sound absorption in a reverberation room.) The NRC rating is determined as the arithmetic average of the absorption coefficients measured by one-third octave bands centred on 250 Hz, 500 Hz, 1000 Hz and 2000 Hz. and rounded to the nearest 0.05.

### PRODUCT SPECIFICATIONS

Product Name	Accent Ceiling Tiles
Composition	100% Polyester Fibre (PET)
Panel Dimensions	595 x 1195mm
Tolerance	(+/-2mm) (-5mm)
Thickness	13mm
Tolerance	(+/-6%)
Weight	3100gsm

### INSTALLATION

Install as per Autex recommendations. Install instructions are included in each pack or available on the website.

### ACOUSTIC PERFORMANCE

Accent Ceiling Tiles is specifically designed to reduce and control reverberated noise (echo) in building interiors.

### LIGHT REFLECTANCE VALUES BY COLOUR

LRVs were measured in accordance with BS 8493:2008+A1:2010

Pavilion	78	Zenith	22
Opera	49	Lotus	16
Savoye	47	Galaxy	16
Senado	45	Iron Bank	13
Rosada	45	Pinnacle	8
Acros	42	Empire	6
Falling Water	36	Tree House	3
Bosco	29	Petronas	2
Flatiron	25		



## **FIRE RATINGS**

### **ISO 9705: 1993**

Classification: Group 1-S  
Smoke Production Rate: <math><5.0\text{m}^2/\text{s}</math>  
As required by NZBC C/VM2

### **AS ISO 9705 - 2003**

Classification: Group 1  
(SMOGRARC): <math><100\text{m}^2/\text{s}^2</math>  
Assessed using methodology AS ISO 9705 - 2003  
in accordance with AS 5637.1:2015, as required  
by BCA Specification C1.10-4  
FAR 4055-2 dated 8th October, 2013

### **EN13501-1:2007+A1: 2009**

B - s2, d2  
Report WF 336911 dated 25th February, 2014

### **ASTM E-84-14**

Class A, FS:0 - SD:10  
R3297-10R1 - 17th March, 2015

## **VOC EMISSIONS**

Autex polyester has been tested for chemical emissions in accordance with ASTM D5116 and is considered as a low VOC product.  
VOC concentration: 0.009 mg/m<sup>3</sup> (7 days).

## **WATER VAPOUR SORPTION**

ASTM C1104 / C1104M-13a

Test conditions: 49°C, 95%RH

Water vapour absorbed and adsorbed after 4 days: 0.4% by weight.

## **IMPACT RESISTANCE**

ISO 7892:1988

## **HARD BODY IMPACT**

There is no surface damage or penetration to Accent Ceiling Tiles when subjected to hard body impacts. When adhered to 10mm plasterboard, the system can resist a 9-joule impact. This is equivalent to the impact of a 0.5kg object dropped from a 2m height. A small indentation might be observed when subjected to an impact equivalent to the impact of a 0.5kg object dropped from a 0.5-m height.

## **SOFT BODY IMPACT**

There is no surface damage or penetration to Accent Ceiling Tiles when subjected to soft body impacts. When adhered to 10mm plasterboard, the system can resist a 70-joule impact. This is equivalent to the impact of a 50-kg object dropped from a 150mm height.

## **MICROBIAL RESISTANCE**

ASTM G21-15

Growth Rating: 0 (No growth)

Accent Ceiling Tiles does not promote the growth of moulds and mildew.

## **COLOUR FASTNESS TO LIGHT**

Accent Ceiling Tiles is suitable for indoor use only. Light fastness is dependent on use and exposure. Accent Ceiling Tiles has been evaluated to the following standard:

ISO 105-B02:2014

Rating: 6 (Highest = 7)

## **COLOUR FASTNESS TO RUBBING**

ISO 105-X12:2016

Dry Rating: 4-5 (Highest = 5)

Wet Rating: 4-5 (Highest = 5)

## **PATTERN REPEAT**

Non-woven. No pattern repeat but product has directional grain. Product may vary from samples and batch to batch due to fibre blending and lay-up which is an inherent feature of this product.

## **FABRIC CARE**

Blot spills from fabric quickly. Wipe with a damp cloth. Avoid rubbing and excessive amounts of water as this will affect the finish. Use carpet or upholstery shampoo as directed. Blot with a clean dry cloth after each application of solution.

Custom printed Accent Ceiling Tiles requires the services of a specialist cleaning company. Refer to the Accent Ceiling Tiles Cleaning and Maintenance Guide for more information.

## **BACK LOADING**

None. All loads to be independently supported or transferred to the grid. For questions and concerns please contact your Autex account manager.

## **ENVIRONMENTAL**

Autex is committed to best practice through our ISO 9001 and ISO 14001 certified Quality and Environmental Management Systems.

Autex Accent Ceiling Tiles contains a minimum of 45% previously recycled polyester fibre (from PET bottle-flake). Off-cuts and manufacturing waste are re-used or recycled wherever possible.

Uncontaminated Accent Ceiling Tiles can be recycled.

Autex Accent Ceiling Tiles is manufactured from 100% polyester fibres and does not contain formaldehyde binders. Autex polyester fibres support safer indoor air quality and will not become a potential airborne pollutant.

Independently certified by Declare (Red List Free) and Product Health Declaration (Platinum level).

## **SERVICE**

For further information about Accent Ceiling Tiles please contact your account manager or visit our website. [www.quietart.com.au](http://www.quietart.com.au)



Q  
A  
E  
L  
B  
A

## COLOUR OPTIONS



MOQ's apply to some colours. To find out more, or to order a sample, please contact your Account Manager or visit our website.

Autex Preferred Supplier

QuietArt

[www.quietart.com.au](http://www.quietart.com.au)

0418 822 848