

COOLING

OUR URBAN ENVIRONMENT

KEY FEATURES

- *Complies with AS/NZS 4859.1*
- *Complies with AS/NZS 4586:2004*
- *Low water transmission rate <1 g/24h/m²/kPa*
- *High Water vapor transmission rate, 112.7 g/m²/24 hour*
- *B.C.A. CodeMark Certified*
- *Certified by Good Environmental Choice Australia*
- *Very high S.R.I. 113.89 Energy Efficient*
- *Very Low V.O.C. <5gl.*
- *High Elongation, 685% elongation*
- *Excellent Dirt Pickup Resistance*
- *High U.V. stability, 3972 hrs UVB testing, >98% Gloss Retained.*
- *Plasticizer free.*
- *Excellent resistance to alkali*

Technical Bulletin apaa-2058

Sports Coat

An Infrared Heat Reflective Non-Skid Concrete Pavement Coating.

Description:

Energy Star Sports Coat is an Infrared Heat Reflective polycarbonate modified acrylic non-skid pavement coating. It is designed for use as a safety coating for masonry surfaces such as pool surrounds, walkways, tennis courts or any masonry surface exposed to moderately heavy human foot traffic. The product is also extensively used as a non-skid safety finish over elastomeric waterproofing membranes on rooftop entertainment decks, along walkways and around spa baths.

Energy Star Sports Coat is based on our proprietary Dirtguard Technology that brings a new level of exterior durability to the product. It employs aerospace industry polycarbonate technologies to give molecular level protection against damage from UV light, water, and environmental contaminants. Outstanding adhesion, flexibility and mould resistance is designed into the product utilising over four decades of formulation experience with our harsh Australian conditions.

The product is extremely abrasion resistant and contains an exceptionally durable synthetic partial as the non-skid aggregate. The synthetic aggregate will tolerate constant foot traffic with minimal abrading and has extraordinarily strong resistance to staining and dirt pickup. Dirt, dust and contaminants wash away easily from its surface, maintaining a fresh and even look over long periods of time. The product is easy to maintain and keep clean and has a good balance of non-skid performance while being nonabrasive to bare feet when used on pool surrounds.

Energy Star Sports Coat has been tested to AS/NZS 4586:2004 – Slip Resistance Classification of New Pedestrian Surfaces and meets the recommendations of HB-197 for swimming pool surrounds and communal shower rooms.

Masonry substrates used for paving such as concrete and brick pavers constitute a thermal mass and are extremely high absorbers of infrared heat from the sun, this heat radiates back into the air around it and to any human occupant that stands upon it.

Energy Star Sports Coat is an infrared heat reflective non-skid coating that incorporates colour infused nano ceramics. This technology developed by Astec reflects heat by selective reflection of infrared light and will reduce surface temperatures by as much as 50% during the extremes of summer.

Where to use:



Confidence for Certifiers, Builders and Architects

Astec Energy Star products are the first, and only range of thermally regulated roofing finishes, texture coatings and elastomeric deck and wall membranes to be CodeMark certified and approved for guaranteed compliance with the B.C.A. Section J – Energy Efficiency Guidelines.



Sports Coat



Description cont:

The product is tough and hard wearing yet possesses the excellent elongation properties necessary to tolerate movement cracks in masonry substrates. The product is silicone modified for enhanced water resistance and will not soften when exposed to standing water during long periods of inclement or highly humid weather conditions.

Astec Energy Star technology enables us to offer even dark-coloured coatings that reflect fully 50% of Solar energy with solar reflectance values of up to 58% higher than standard coatings of the same colour.

Energy Star Sports Coat is a low odour formulation and contains no harmful solvents making it environmentally friendly and safe for applicators during application.

The product is designed on an internally plasticized acrylic technology, which means, it does not contain plasticizers that can leach from the cured film over time and detract from the product's long-term flexibility.

Energy Star Sports Coat is highly water resistant, has excellent flexibility and its adhesion is promoted, providing an ultra-strong bond to the substrate.


The cured film is tough, highly flexible and has good elongation properties, and because it remains cool, testing has shown that it will retain its mechanical performance by up to eight times longer than conventional acrylic nonskid coatings.

Infrared Heat Reflective:

A coating doesn't have to be white to be cool.....! As an Architect, Builder or Homeowner, rich, dark colour is an important part of your building design and decoration. Unfortunately, dark colours soak up the sun and get hotter and hotter as the day progresses. As a result, building temperature and power consumption are increased, and greater demand is placed on our environment and global resources.

The comparative data represented on the graph above is actual spectral results printed during tests conducted to ASTM E-903 on a Lambda 9000 Solar Reflectometer. The graph shows the difference in heat reflection between a standard charcoal roofing paint and Energy Star Charcoal. Solar reflectance values for the Energy Star are 58% higher than the standard coatings of the same colour.

As an example, standard slate grey has a Total Solar Reflectance, (T.S.R.), value of 16.6% compared with Energy Star Slate Grey that has a T.S.R. of 40.30%, (58% higher reflectance). Energy Star® coatings are sustainable Energy Efficient solutions for roofs and walls that significantly reduce absorbed heat in the building envelope.

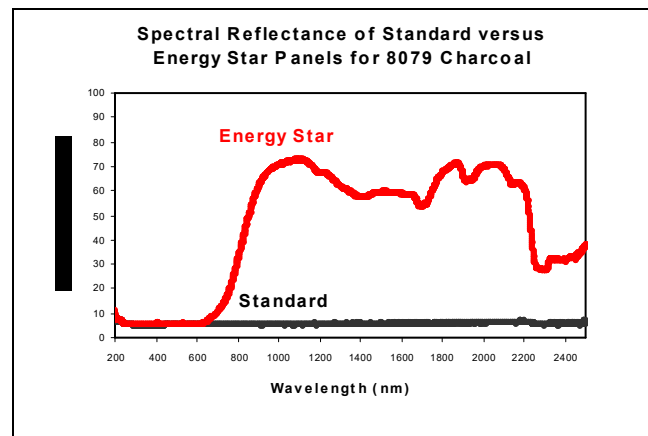

The use of Energy Star® systems during restoration or new construction results in energy cost savings, cooler occupancy zones and reduced Co2 emissions.

Durability:

Heat and moisture are the two main contributing factors that accelerate the degradation of exterior coatings. In highly humid, tropical environments, conventional acrylics have been known to last as little as three years. In Australia some dark façade colours can start to change colour and fade from its original depth of colour within 3 years.

Energy Star coatings have increased durability and life expectancy compared with conventional paints. Independent laboratory testing to ASTM Standards confirmed Solar Reflectance Indices of 241% greater than normal paints on a dark colour like Slate Grey.

Heat generated by Solar Radiation from the sun is one major contributing factor to exterior coating degradation, especially in a standard dark colour.

Energy Star Sports Coat remains cool. After exposure to 3972 hrs of UVB 313/Moisture testing, in accordance with ASTM G53-96, the gloss, depth of colour, adhesion and film integrity remained un-changed. This provides a performance increase of more than 400% when compared to a standard paving acrylic. Quite simply, the less heat on the coating the longer they last.

Moisture is the second major contributing factor to exterior coating degradation, especially in water based acrylic coatings. Atmospheric moisture enters the coating film on a daily basis and swells the coating, greatly reducing its life.

Our proprietary Dirtguard polycarbonate technology and specialty silicones used in Energy Star Sports Coat prevent the entry of moisture into the coating film. With water transmission resistance testing in accordance with AS/NZS 4548.5-1999 results at <1 g/24h/m²/kPa.

Sports Coat



Durability Cont:

As a result, the coating does not swell and can last 400% longer than standard sidewall acrylics. Simply put, the less moisture that the coating film has to tolerate, the longer it will last.

High Solar Reflectivity, excellent resistance to water, strong elongation and UV durability all contribute to Energy Star Sports Coat being one of the most advanced and functional nonskid coatings in Australia.

Principal Use:

Correctly prepared, masonry, brick, block, aerated concrete, fibre cement desk, timber decking and over elastomeric waterproof membranes.

Available Colours:

Full range for light to dark accents.

Preparation and Application Data:

Surface Preparation

All surfaces must be clean dry and free of contaminants. Remove dirt, dust from the surface with a high-pressure cleaner or for small areas with a stiff bristle broom and garden hose.

Grease and oils should be removed by first applying Astec Enviroclean, industrial strength degreaser, to the affected areas with a stiff brush then followed by a thorough high pressure clean of the entire area to remove all contaminants. Repeat as necessary until all grease and or oils are removed.

Previously painted substrates should be high pressure cleaned to remove all contaminants including the above methods for any grease and oils. Any blisters or flaking paint should be removed and scraped back to a solid edge.

Previous paints that show a complete lack of adhesion and are fully delaminating from the surface should be completely remove back to the original substrate. Removal can be carried out by either using a concrete grinder or with Astec Regel industrial strength paint stripper and low-pressure hot water. Do not use Regel on bitumen tennis courts as it will emulsify and soften the bitumen.

Allow the surface to thoroughly dry then carefully vacuum the entire surface to remove all micro contaminants left over from the above cleaning processes. Vacuuming should be done just prior to product application. On smooth concrete surfaces vacuuming can be replaced by the use of a garden leaf blower.

Seal bare concrete and previously painted surfaces.

Bare and previously painted concrete and or pavers must first be seal and have their surface conditioned before the application of Sport Coat. Apply one very thin coat of Astec Multiseal to the entire area with a 6mm low nap synthetic roller cover. Multiseal will bind the existing painted surface or bare concrete to a hard well bound surface ready for Sport Coat application.

Seal Waterproofing Membrane on Rooftop and Podium Decks.

Apply one very thin coat of Astec Multiseal to the entire area with a 6mm low nap synthetic roller cover. Multiseal will bind the waterproof membrane to a hard well bound surface and provides excellent inter-coat adhesion with the Sport Coat.

Prime Bitumen surfaces.

Apply one coat Astec Epitec Primer. Epitec Primer is a two-component water based epoxy sealer primer that has strong adhesion to bitumen and existing well adhered paints and holds back bitumen bleed through fresh topcoats.

Prime Timber decking.

Apply one coat Wallmaster Multi-block Primer.

Glazed and porcelain tiles.

Do not use this system for glazed ceramic tiles.

Key Benefits:

- Meets HB-197 rating for swimming pool surrounds and communal shower rooms.
- Very high **S.R.I. 113.89**
- High Solar Reflectivity in dark colours
- Excellent masonry Crack Tolerance.
- Excellent elongation 685%.
- High water transmission resistance <1 g/24h/m²/kPa
- High water vapor transmission 112.7 g/m²/24 hour
- Energy efficient product.
- Cooler internal temperatures.
- Cooler pavement temperatures.
- Plasticizer free, (internally plasticized).
- Excellent dirt pick-up resistance.
- Will form films at temperatures as low as 12°C.
- High volume solids.
- Outstanding Durability.
- Low V.O.C., Low odour.

Sports Coat



Application Data

Application

Stir well before use with a flat paddle or with a metal paint wacker using an up and down scooping action. Apply two coats Energy Star Sports Coat with a good quality synthetic brush a new unused 4 to 6mm foam roller cover or with a soft rubber squeegee.

Application should be performed as detailed in the graphic below to maintain straight overlap lines that can occur during application on large areas.

Although the product can be walked on generally within one to two hours for recoat purposes, allow the product to cure for 24 hours in direct sun before full pedestrian access is given.


Limitations

Do not apply to surfaces that have had wax or silicone-based materials previously applied. Do not apply when ambient temperature is below 10°C, above 35°C or when humidity is very high.

Energy Star Sports Coat is a water-based material, therefore should not be applied during inclement weather or when precipitation or freezing are imminent.

Pack Sizes

1 Ltr / 4 Ltr / 10 Ltr / 15 Ltr

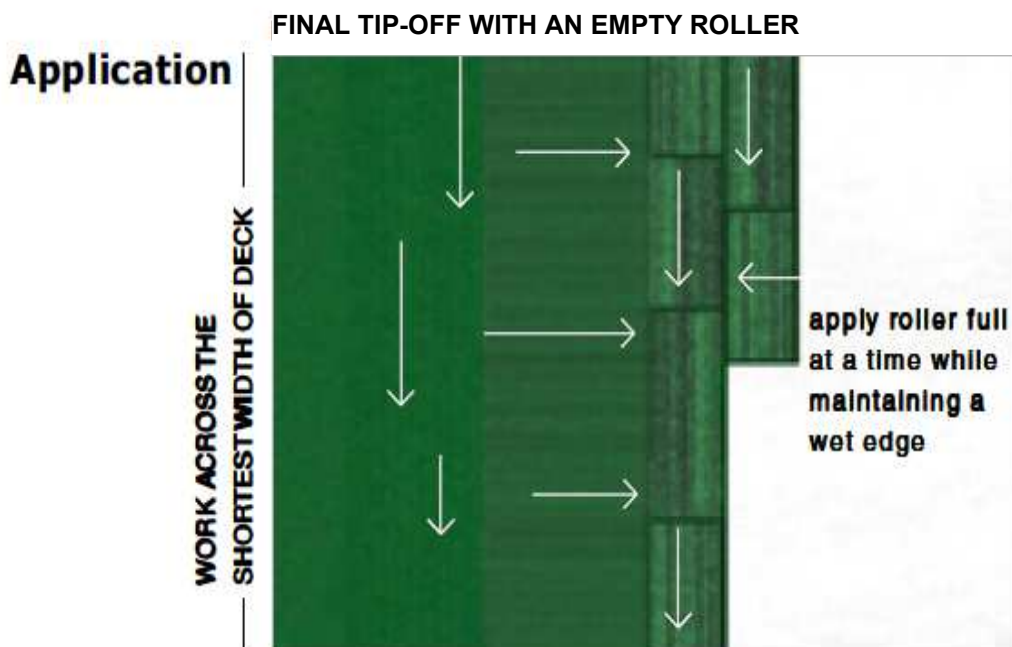

Sports Coat



Paint Disposal

Do not pour left over paint down the drain. Brush any leftover paint onto newspaper and allow to dry in a well-ventilated area. Dispose of the dry paint via domestic waste disposal. Empty cans should be left open and allowed to dry then disposed of in accordance with your local recycling legislations.

Safety Direction

Keep out of reach of children, provide adequate ventilation during use and do not dispose of left-over paint in any drainage systems.

First Aid

Eye Contact

Irrigate continuously with water for fifteen minutes holding eyelids open. Seek Medical advice.

Swallowed

Contact a doctor or Poisons Information Centre immediately. Do not induce vomiting. Give a glass of water. If vomiting does occur, place victim's face downwards at low level to prevent vomit entering lungs. Contact Astec for the relevant Material Safety Data Sheet.

Product Data:

S.R.I. <i>Solar Reflectance Index</i> (White) to ASTM E 1980-01	113.89 (Medium wind conditions)
%T.S.R. <i>Total Solar Reflectance</i> (White) to ASTM C1549-02	90.03
Emittance to ASTM C-1371	0.90
%T.S.R. 44 standard colours	See test reports or exterior colour card
S.R.I. 44 standard colours	See test reports or exterior colour card
Gloss level	Low Sheen
Drying Time at 25°C @ 250 MIC W.F.T.	45 min dry and block resistant
Recommended thinners	Water / Thinning not recommended.
Wash up	Water
Recoat time at 25°C	1 to 2 hrs
Spread rate at recommended D.F.T (480 D.F.T.)	2.4 m ² per ltr
Specific Gravity.	1.014
Volume Solids.	38% V/V
P.V.C.	22% V/V
V.O.C	<5 g/l

Sports Coat



Performance Data:

<u>PROPERTY</u>	<u>TEST METHOD</u>	<u>MEASURED RESULT</u>
Water vapor transmission rate. @ 25°C, g/m ² /24 hour (SGS)	AS/NZS 4548.5-1999	112.7
Water transmission Resistance. @ 25°C, g/24h/m ² /kPa (SGS)	AS/NZS 4548.5-1999	<1 g/24h/m ² /kPa
Crack Bridging Ratio (CSIRO)	AS/NZS 4548.5-1999	31.00
Elongation @ 25°C, at break, %	ASTM D412-1992	685
Tensile strength @ 25°C, MPa	ASTM D412-1992	4.72
Stability, heat aged, 10 days @ 60°C	(1)	Pass
QUV Accelerated weathering (Colour (Black))	UVB / Moisture 60 deg C	3972 hrs >98% Gloss Retained

Physical resistance properties compared to a premium acrylic:

<u>TEST DESCRIPTION</u>	<u>PREMIUM ACRYLIC</u>	<u>Dirtguard IR Elastic PCM LS.</u>
1 Boiling Water Test	Fail Severe whitening	Pass - 1
2 Water Resistance		
-Blistering	Dense poor 8	Sparse good 1
-Whitening	DL + 4.88 (Whitening did not recover)	-0.126
3 Crosshatch Adhesion	OB,c	OB,c
4 Accelerated Weathering (ASTM G53-96)	Moderate chalking and surface whitening.	Excellent gloss retention with little to no surface change.

Test Procedures:

Boiling Water Test

Place 24hr old test panel into boiling water for 30 minutes. Removed and dried panel then noted blistering and adhesion loss.

Water Resistance Test

Placed 24hr old test panels into lab temperature water, 25 deg C, for 48 hrs. Remove, dry and measure for water whitening and blisters.

Accelerated Weathering

ASTM G53-96

2800hrs of UVB 313 Lamps/Moisture testing, in accordance with ASTM G53-96. Sample were exposed to four-hour cycles of U.V.B. at an irradiance of 1.05 then moisture at 60 deg C for a total period of 2800 hrs.

Cross Hatch Adhesion Test

A test panel has lines scribed through the coating to the substrate at 3mm intervals in a crosshatch pattern. Adhesive tape is applied and remove noting any failure.

Rating:- OB = 90% squares removed.
C = Cohesive substrate failure.

Warranty:

The technical data furnished herein is based upon data believed by Astec Paints to be true and accurate at the time of writing, however, no guarantee of accuracy is given or implied and is subject to change without notice. This information is given in good faith for the assistance of users. No legal warranty expressed or implied is made as to its accuracy, completeness or otherwise. Every person dealing with this material herein does so at their own risk absolutely and must make independent determinations of suitability and completeness from all sources to ensure their proper use. We have no control over the condition under which these products are stored, handled, or used; therefore, our recommendations must not be regarded as a mounting to legal warranty or as involving any liability on us.

Astec Paints Australasia

22-24 Pinn Street
St Marys
Adelaide, South Australia 5042
Phone: 618 8297 2000 | Fax: 618 82972555
Toll Free: 1300 76-99-60
enquiries@astecpaints.com.au
www.astecpaints.com.au



In a climate dominated by heat, it makes sense to provide exterior finishes