

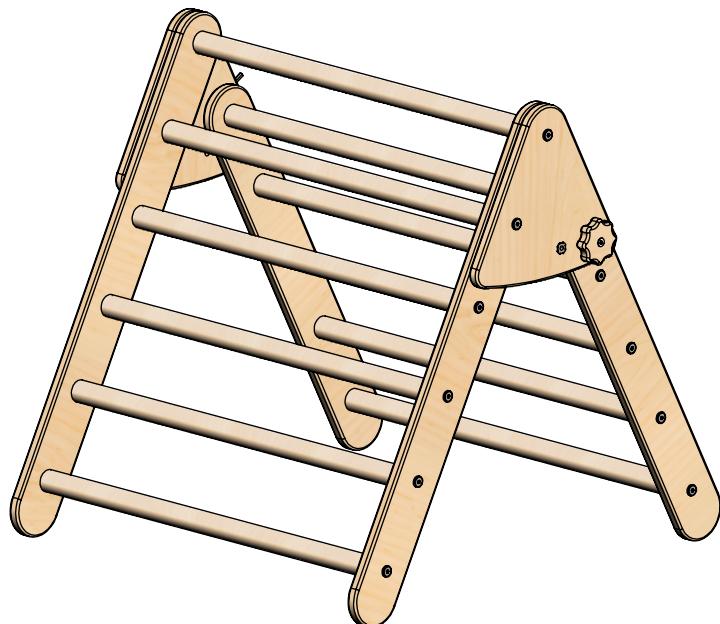
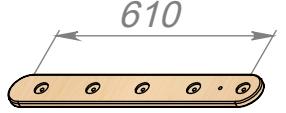






## SMALL TRIANGLE ASSEMBLED



## ASSEMBLY PARTS

1.1	 1.1 Long Sidewall (2pcs)	1.2	 1.2 Short sidewall (2pcs)
1.3	 1.3 Long nog (13pcs)	1.4	 1.4 Left connector (1pc)
1.5	 1.5 Right connector (1pc)	1.6	 1.6 Level controller (2pcs)
2.1	 2.1 Flat head 50mm screw (20pcs - 2pcs spare)	2.2	 2.2 Round head screw (2pcs - 1pc spare)
2.3	 2.3 4mm hex key (1pc)	2.4	 2.4 5mm hex key (1pc)

# STEP 1

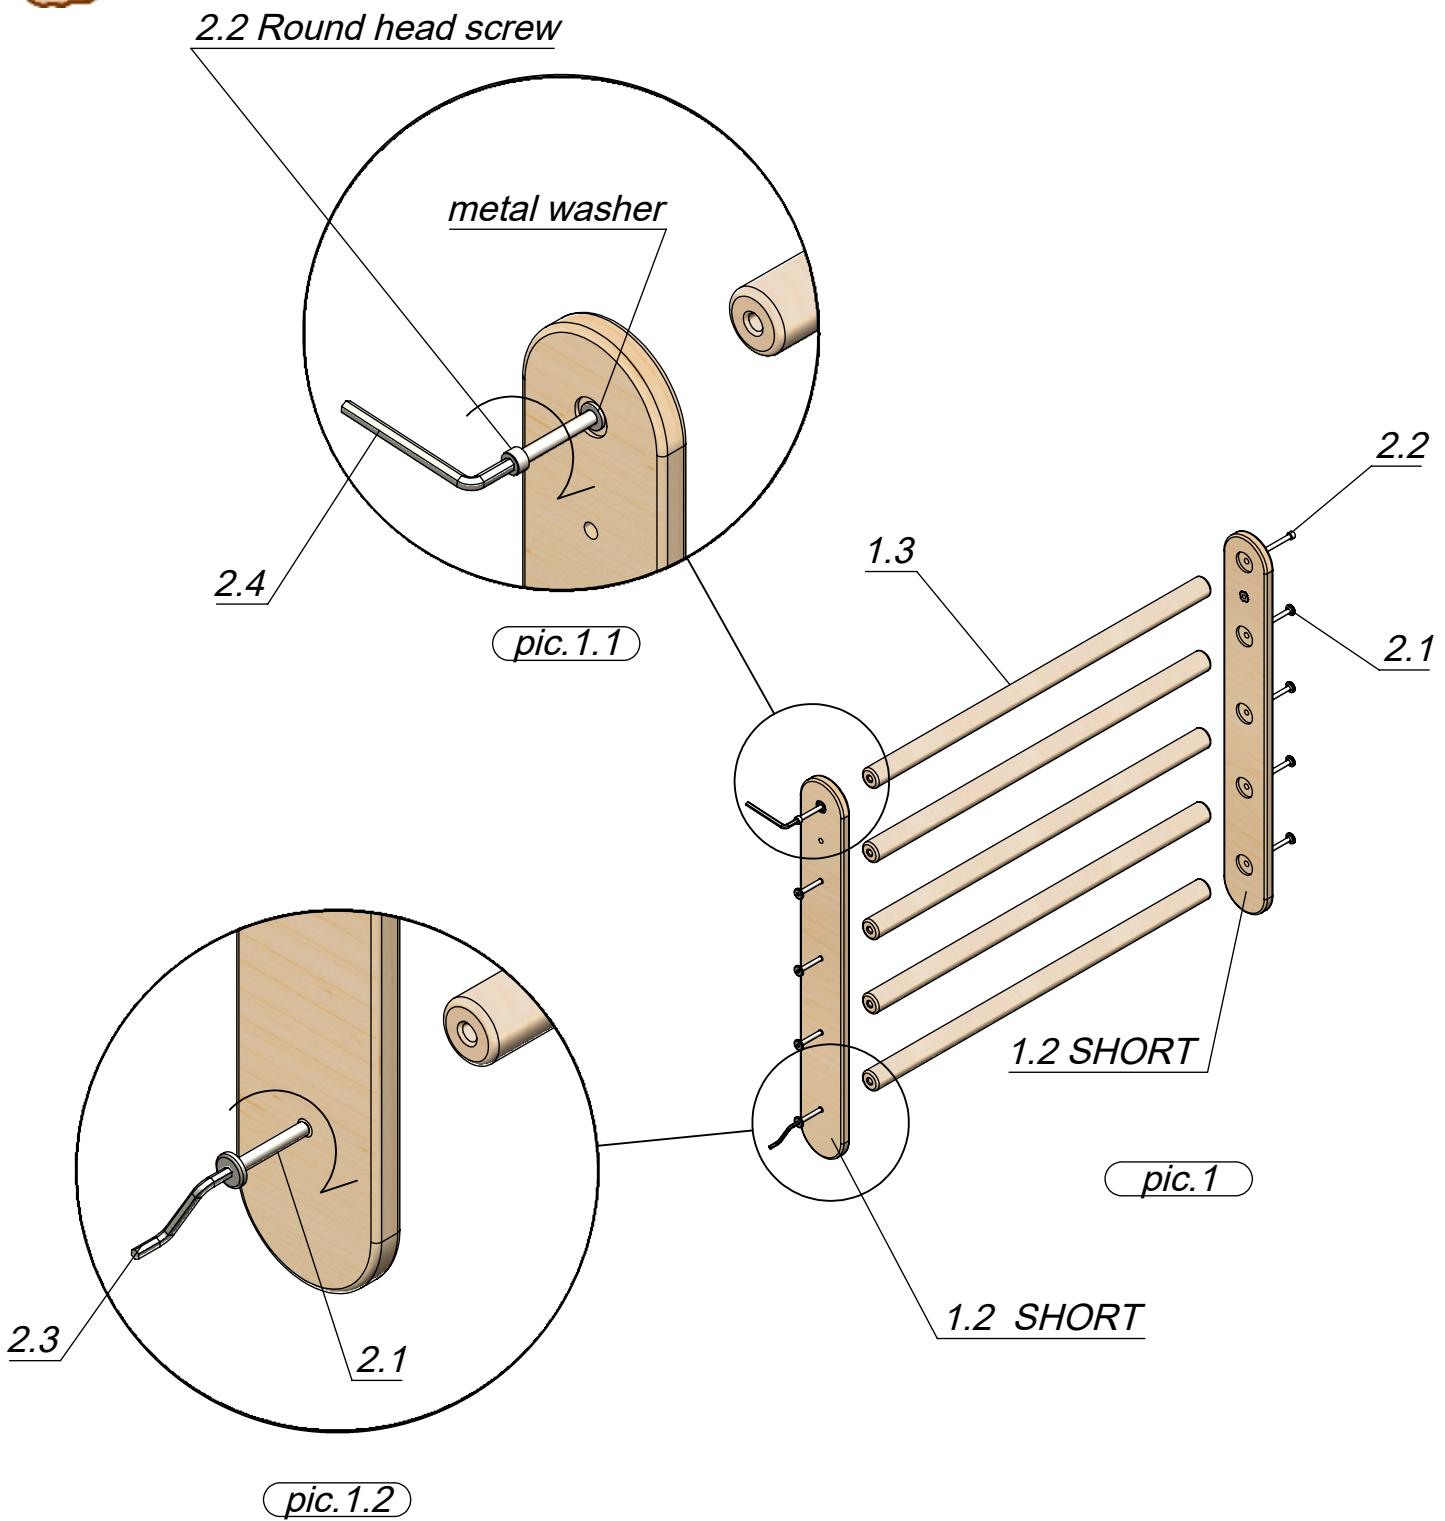

1. Take the Short sidewall (1.2).

2. Put the round head screw (2.2) into the hole with the metal washer (see pic.1.1) and screw it into the long nog (1.3).


3. Screw 5 flat head screw (2.1; see pic.1.2) to the long nogs (1.3).



## STEP 2

repeat operations with part 1.4 LEFT




*Letter L and R inwards*

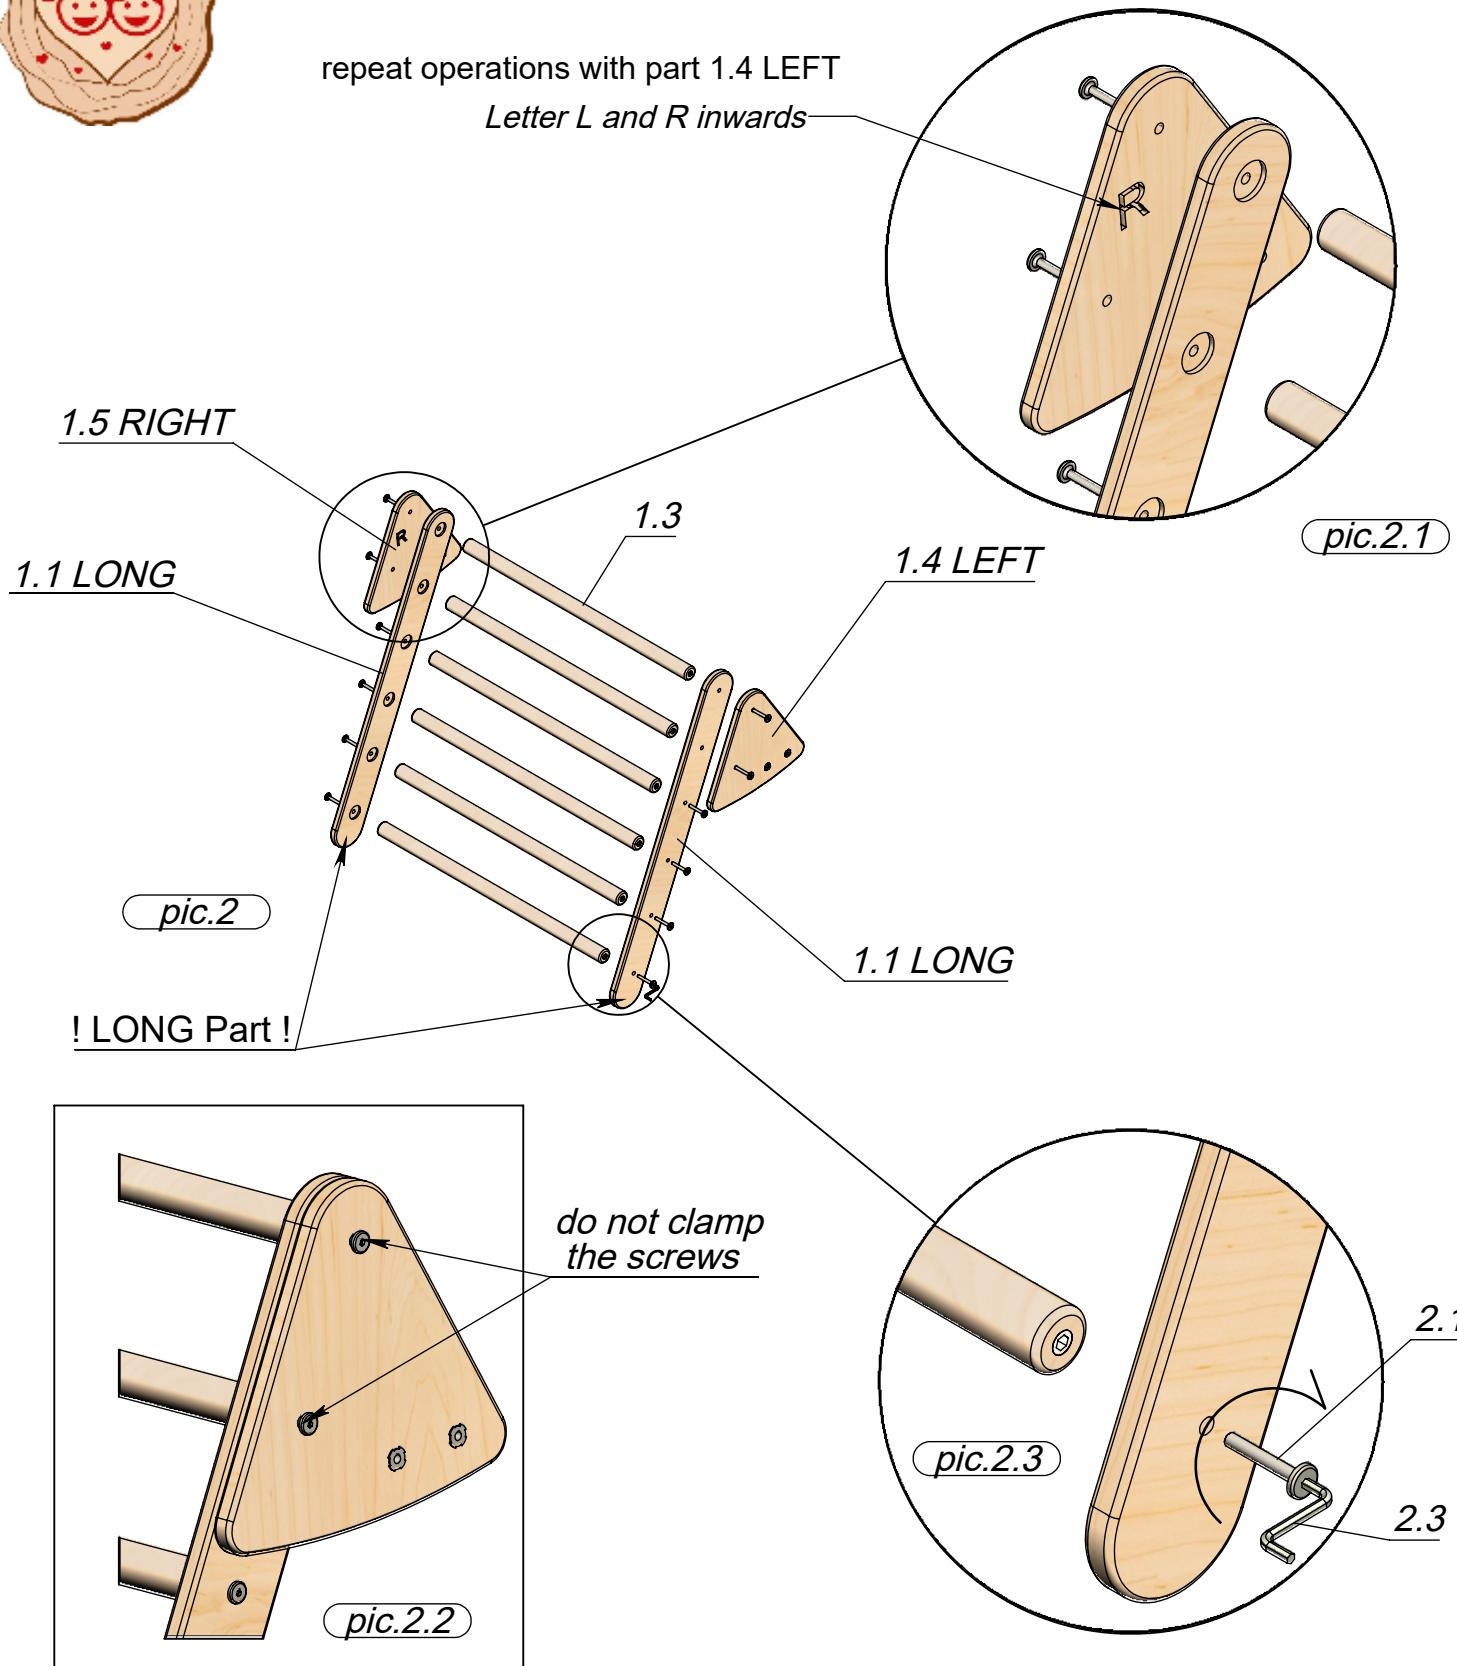

1. Take the Long Sidewall (1.1), Long nog (1.3), Left connector (1.4), and Right connector (1.5).

2. Fasten parts 1.4 and 1.5 with screws 2.1. Letters on the Connectors 1.4 and 1.5 should look inwards (see pic.2.3), as shown in the picture (see pic.2.1).  
Do not tighten the screws 2.1 on the connectors (see pic.2.2).

3. Fasten the rest of the 1.3 using the screws 2.1 (see pic.2.3).

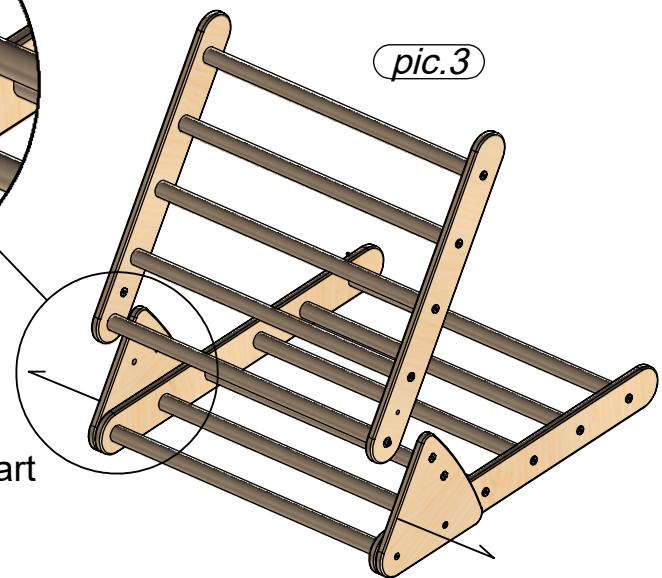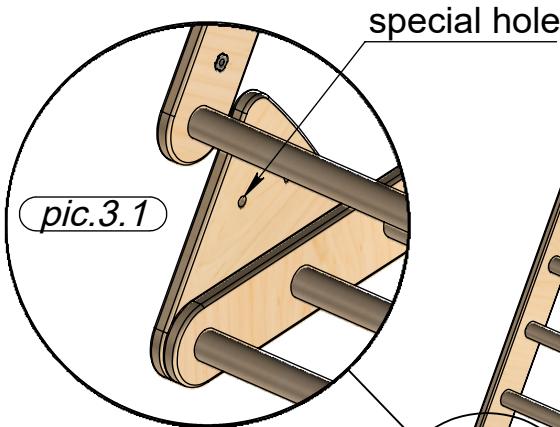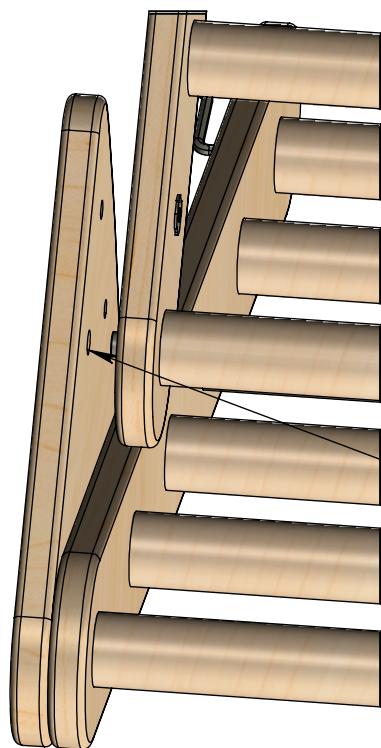


Install the screw head in the special hole

1. Put the short assembled ladder (with a protruding screw.) on the large assembled ladder.
2. Insert the protruding heads of the screws 2.2 (look at the page #1) into the special holes(see pic.3.1 and pic.3.2).

---

**STEP 4** tighten the screws after assembly

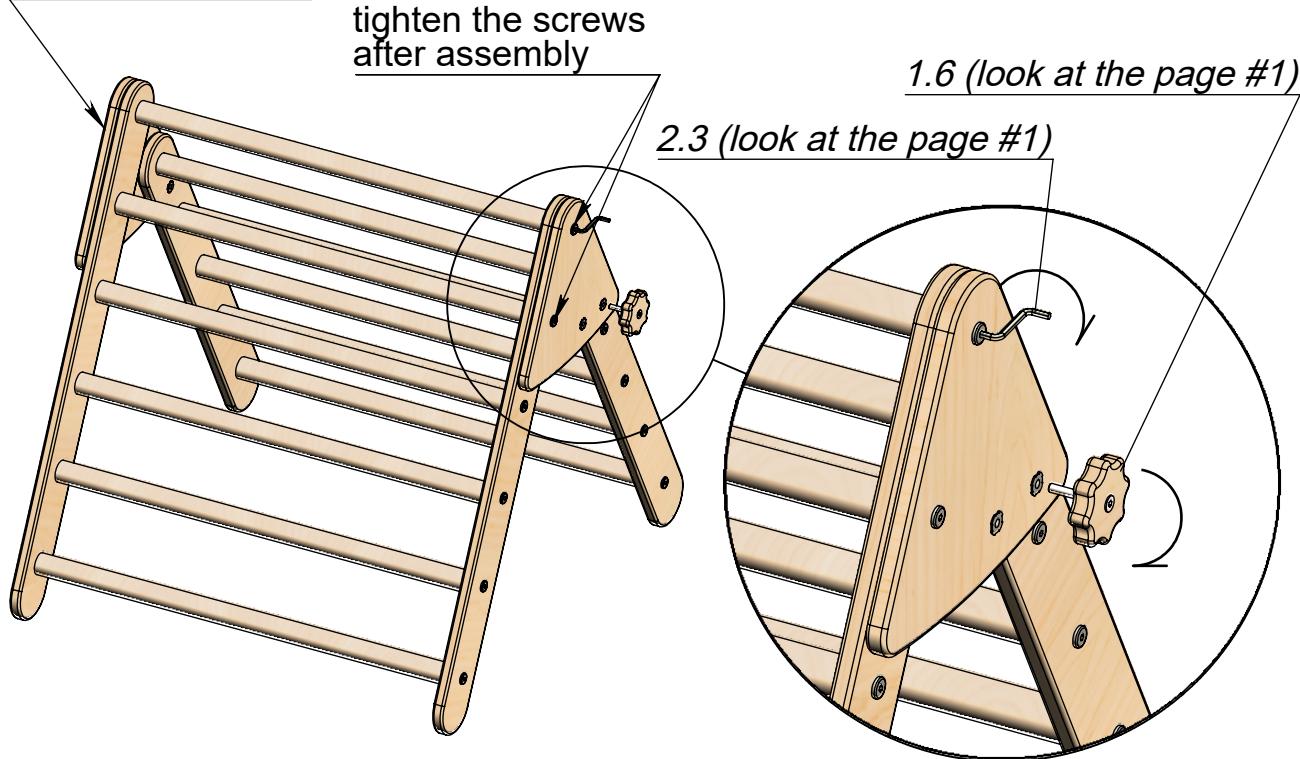

Use level controller 1.6 to change the positon of the triangle