

Transport rollers/lever bars

ETR 4/150 – Corner transport roller set with 150 kg load-bearing capacity

- ▶ For fast and easy moving of box-shaped objects and furniture
- ▶ Low loading height for safe transport
- ▶ Housing made of welded steel sheet
- ▶ Loading surface with anti-slip mat

Model	ETR 4/150
Art. no.	6197150
Technical specifications	
Load-bearing capacity	150 kg/pc.
Dimensions (L x W x H)	255 x 255 x 85 mm
Loading height	15 mm
Weight	2 kg/pc.



Rotate through 360°

Scope of delivery:
 > Four corner rollers
 > Three solid rubber steering rollers per corner roller




Application example
 Perfectly suited for easy shifting of box-shaped objects (cabinet not included in scope of supply)

HS Series – Lever bars with 1.5 t and 5 t load-bearing capacity

- ▶ Solid steel bar for maximum stability
- ▶ Easy-action steel rollers

Model	HS 1.5	HS 5
Art. no.	6196015	6196050
Technical specifications		
Load-carrying capacity	1.5 t	5 t
Lever length	2 000 mm	2 000 mm
Number of rollers	2	2
Roller size	70 x 54 mm	70 x 54 mm
Weight	approx. 16 kg	approx. 32 kg

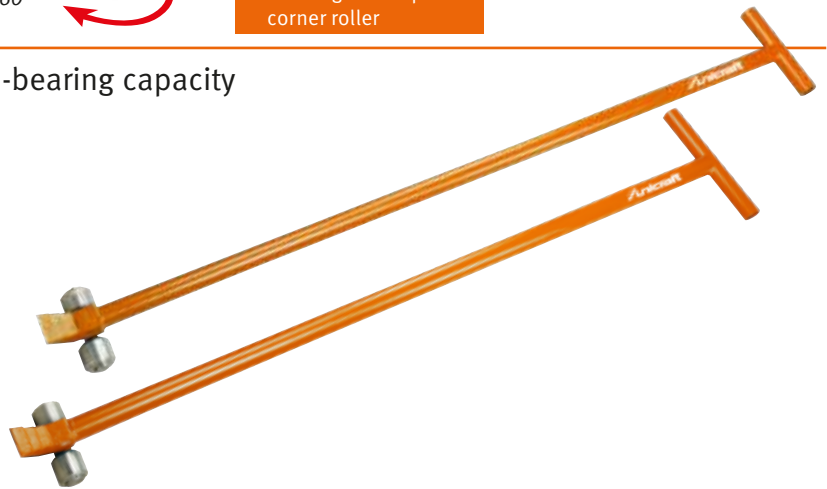

TR Series – Transport rollers with 3 t and 6 t load-bearing capacity

- ▶ For easy and safe shifting of heavy objects
- ▶ Large ball-bearing borne nylon rollers and anti-slip rubber surface

Model	TR 3	TR 6
Art. no.	6193030	6193060
Technical specifications		
Load-carrying capacity	3 t	6 t
Dimensions (L x W x H)	400 x 228 x 100 mm	420 x 340 x 120 mm
Number of rollers	4 each	6 each
Roller size	85 x 90 mm	85 x 85 mm
Weight	approx. 9.5 kg	approx. 12 kg



VTR Series – Adjustable transport rollers

- ▶ Set of 2
- ▶ Large ball-bearing borne nylon rollers
- ▶ Adjustable using 2 steel bars from 500 mm to 1 400 mm (VTR 6) or from 720 mm to 1 500 mm (VTR 12)
- ▶ Anti-slip rubber surface

Model	VTR 6	VTR 12
Art. no.	6192060	6192120
Technical specifications		
Load-carrying capacity	6 t	12 t
Dimensions (L x W x H)	320 x 268 x 110 mm	420 x 268 x 110 mm
Number of rollers	4 each	6 each
Roller size	85 x 90 mm	85 x 90 mm
Weight (per block of rollers)	approx. 30 kg	approx. 38 kg

Scope of delivery:
 > Two transport rollers with two steel rods
 > Transport rollers can be connected up to a length of 1.40 m (VTR 6) or 1.50 m (VTR 12)

