

TREKKER

LUXURY DECKING & CLADDING

EXPANSION GAPS FOR DECKING INSTALLATION




- Always respect our installation manual
- Don't stock under the sun
- Keep the material in a flat surface



- When installing the deck, be aware of the ambient temperature;
- If the boards are exposed to hot sun, expect that the boards will be expanded when installed, so respect the following expansion gaps;

Ambient temperature	10°C - 20°C	20°C - 30°C	30°C - 35°C	35°C - ... °C
Expansion gaps	8mm	7mm	6mm	

INFORMATION

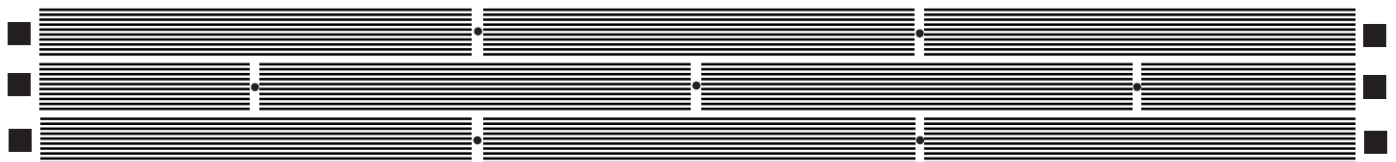

- Expansion gaps

- Distance to fixed objects (walls, etc.)

- Always respect the distances between the deck and fixed objects;
- Never fix the deck directly without the clips. The composite decks need to expand and contract with the variations of temperature;
- Do not use thinner battens than the ones in the installation manual;