


TECHNICAL DATA SHEET

HO960 TREKKER VULCAN FASCIA - 2-SIDED USAGE: COMMERCIAL AND RESIDENTIAL **APPLICATIONS**

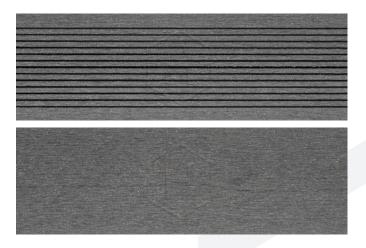

TREKKER VULCAN FASCIA

PRODUCT DETAILS

Product Reference	HO960			
Width x Thickness	100 x 11mm			
Board Type	2-Sided Flexitrim	FSC		
Pattern	1-Strip Plank	www.fsc.org FSC [•] C009500		
Length	1500mm	The mark of		
Composition	Wood/Polymer Composite	responsible forestry		
Maintenance	Comprehensive cleaning and maintenance instructions and materials are available from Havwoods Ltd. for all floors.			

INSTALLATION METHODS

Fully Bonded	No	No Clips and screws are included (please ask a member of staff for details)			
Fixing					
Origin:	Europe				

TECHNICAL CRITERIA						
Characteristics	Requirements - EN 15534-4	Result				
Humidity	Declaration	0.31%				
Cupping	Declaration	0.06mm				
Density	Declaration	1459 Kg/m ³				
Impact Resistance	≤ 0.5mm	Max 0.12mm				
Flexural Properties	F ¹ Max 3300N (Mean) F ¹ Max 3000N (Mean) Deflection under load (Mean) Deflection under load (Individual)	1274N 1228N 1.6mm 1.7mm				
Swelling and Water Absorption	Absorption (Mean) ≤ 4% (thickness) ≤ 0.8% (width) ≤ 0.4% (length)	3.00% 0.60% 0.20%				
	Absorption (Individual) ≤ 4% (thickness) ≤ 1.2% (width) ≤ 0.6% (length) Mean Absorption < 7% Individual Absorption < 9%	3.60% 0.70% 0.30% 3.90% 4.20%				
Boiling Test	≤ 7% (mean)	3.70%				
Composition	Declaration	40%/60% Wo 40%/60% Po 10% Others				
Vicat	Declaration	85.2°C				
HDT	Declaration	74°C				
Coef. Thermal expansion	≤ 50 x 10-6K	2.79 x 10-5mr	2.79 x 10-5mm/mm°C			
Resistance to artificial weathering	Declaration	∆L < 5				
Mark	Declaration	EN15534-4 P	EN15534-4 PVC W 50 UC3			

* Subject to compatible subfloor and correct installation (see Installation Guidelines) including sensors.

INSTALLATION AND WARRANTY

All Havwoods floors must be installed by a competent installer who will have the necessary skills and take individual site circumstances into account. Havwoods warranty will apply only to floors which have been installed by a competent flooring installer comparable to BS8201 in the UK or equivalent standard worldwide.

© This technical data sheet was written by Havwoods Limited. Carnforth Business Park, Oakwood Way, Carnforth Lancashire LA5 9FD. At the time of writing and publication of the sheet, all information is specified correctly. The company reserves the right to change the specifications of this product at any time without prior notice to third parties. The photographs used in this sheet are intended only as illustrations. No rights can be derived from them.



Havwoods Limited, Carnforth Business Park, Oakwood Way, Carnforth LA5 9FD T.+44(0)1524 737000 F.+44(0)1524 737001 info@havwoods.co.uk www.havwoods.co.uk