



“WE MAKE THE KITCHEN BETTER!”

Toll Free: 855-855-0399 Email: info@atosausa.com
www.atosa.com | www.atosausa.com
California, Colorado, Florida, Georgia, Illinois,
Massachusetts, New Jersey, Ohio, Texas, Washington

Top Mount Reach-In Freezers

Standard Features

- Top mount compressor with environmentally friendly R290 refrigerant
- Stainless steel exterior & interior
- Dixell digital controller
- Maintains temperatures between -8°F – 0°F
- LED interior light(s)
- Recessed door handle(s)
- Door lock(s) standard
- Magnetic door gasket(s) standard for positive door seal
- Pre-installed casters
- Three(3) pre-installed shelves per section
- Down duct refrigeration to ensure even distribution of air

Optional Accessories

- Extra shelves – includes 4 shelf clips per shelf
MBF8001GR shelf part #: W0402389
MBF8002GR shelf part #: W0402385
MBF8003 left and right shelf part #: W0402192
MBF8003 middle shelf part #: W0402194



MBF8001GR

MBF8002GR

For the best results of food preservation we recommend setting your freezer between -8 °F to 0 °F

1. Don't forget to leave the unit some room to breathe!
2. Please clean the condenser frequently to give the unit more fresh air.



2 YEAR PARTS AND LABOR WARRANTY (US ONLY)
5 YEAR COMPRESSOR PART WARRANTY (US ONLY)

ATOSA USA

MODELS:

MBF8001GR / MBF8002GR / MBF8003



MBF8001GR



MBF8002GR



MBF8003



For confirmation and updates on the latest energy star models, please visit energystar.gov



"WE MAKE THE KITCHEN BETTER!"

Toll Free: 855-855-0399 Email: info@atosausa.com

www.atosa.com | www.atosausa.com

California, Colorado, Florida, Georgia, Illinois, Massachusetts, New Jersey, Ohio, Texas, Washington

SPECIFICATIONS








Models	Door	Capacity (Cu.Ft.)	Shelves	Casters (inch)	Amps (A)	Voltage (V/Hz/Ph)	HP	Refrigerant	Exterior dimensions (inch)	Net weight (lbs)	Gross weight (lbs)
MBF8001GR	1	21.4	3	4	6.3	115/60/1	1/2	R290	28 ^{7/10} ×31 ^{7/10} ×81 ^{3/10}	236	269
MBF8002GR	2	43.2	6	4	8.6	115/60/1	3/4	R290	51 ^{7/10} ×31 ^{7/10} ×81 ^{3/10}	353	403
MBF8003	3	64.9	9	4	5.5	208-230/115/60/1	1 ^{1/4}	R404A	77 ^{4/5} ×33 ^{3/10} ×83	489	569

PLAN VIEW


MBF8001GR

MBF8002GR

MBF8003

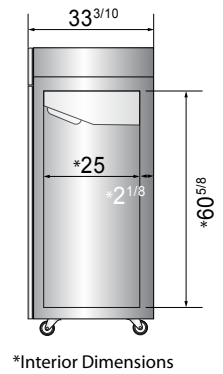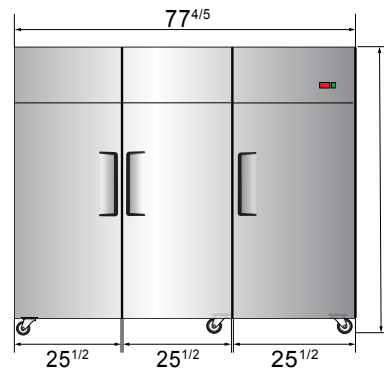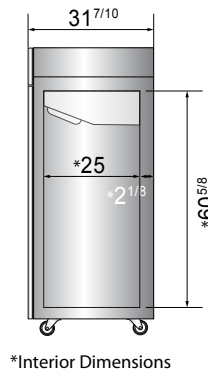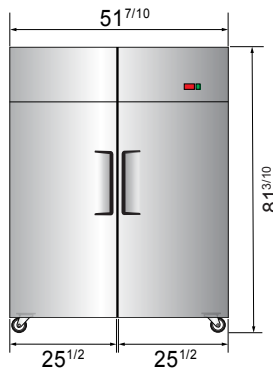

SELF-CLOSING AND STAY OPEN DOOR FEATURE

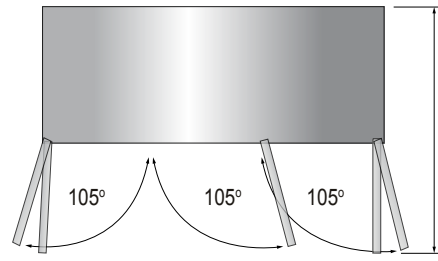

SELF-CLOSING AND STAY OPEN DOOR FEATURE



Casters

Epoxy shelves

Door lock

Down duct

Temperature control



115/208-230/60/1
NEMA-L14-20R
Unit completely pre-wired at factory and ready for final connection to a 115/208-230/60Hz single phase - 20 amp dedicated outlet. Cord and plug set included.
*MBF8003 Only