



**"WE MAKE THE KITCHEN BETTER!"**

Toll Free: 855-855-0399 Email: info@atosausa.com  
www.atosa.com | www.atosausa.com  
California, Colorado, Florida, Georgia, Illinois,  
New Jersey, Ohio, Texas, Washington

# Bottom Mount Reach-In Freezers

## Standard Features

- Bottom mount compressor units with environmentally friendly R290 refrigerant
- Stainless steel exterior & interior
- Electronic temperature controller
- Maintains temperatures between -8°F – 0°F
- LED interior light(s)
- Recessed door handle(s)
- Door lock(s) standard
- Magnetic door gasket(s) standard for positive door seal
- Pre-installed casters
- Three(3) pre-installed shelves per section
- Down duct refrigeration to ensure even distribution of air

## Optional Accessories

- Extra shelves – includes 4 shelf clips per shelf  
MBF8501GR shelf part #: W0402393  
MBF8503GR shelf part #: W0402387  
MBF8504GR shelf part #: W0402387 left/right shelf, part #: W0402388 middle shelf



MBF8503GR

For the best results of food preservation we recommend setting your freezer between -8 °F to 0 °F

1. Don't forget to leave the unit some room to breathe!
2. Please clean the condenser frequently to give the unit more fresh air.



2 YEAR PARTS AND LABOR WARRANTY (US ONLY)  
5 YEAR COMPRESSOR PART WARRANTY (US ONLY)

## MODELS:

MBF8501GR/ MBF8501GRL / MBF8502GR /  
MBF8503GR / MBF8504GR



MBF8501GR



MBF8502GR



MBF8503GR



MBF8504GR



\*For confirmation and updates on the latest energy star models, please visit [energystar.gov](http://energystar.gov)\*



**"WE MAKE THE KITCHEN BETTER!"**


Toll Free: 855-855-0399 Email: info@atosausa.com  
 www.atosa.com | www.atosausa.com  
 California, Colorado, Florida, Georgia, Illinois,  
 New Jersey, Ohio, Texas, Washington

## SPECIFICATIONS


Models	Door	Capacity (Cu.Ft.)	Shelves	Casters (inch)	Amps (A)	Voltage (V/Hz/Ph)	HP	Refrigerant	Exterior Dimensions (inch)	Net Weight (lbs)	Gross Weight (lbs)
MBF8501GR	1	19.1	3	4	6.3	115/60/1	1/2	R290	27×31 <sup>7/10</sup> ×83 <sup>1/10</sup>	265	298
MBF8502GR	2	28.5	6	4	8.6	115/60/1	3/4	R290	39 <sup>1/2</sup> ×31 <sup>7/10</sup> ×83 <sup>1/10</sup>	330	379
MBF8503GR	2	44.8	6	4	8.6	115/60/1	3/4	R290	54 <sup>2/5</sup> ×31 <sup>7/10</sup> ×83 <sup>1/10</sup>	410	465
MBF8504GR	3	68	9	4	6.2	208-230/115/60/1	1	R290	81 <sup>9/10</sup> ×31 <sup>7/10</sup> ×83 <sup>1/10</sup>	551	628

## PLAN VIEW

**MBF8501GR**

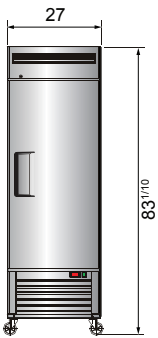







**MBF8502GR**

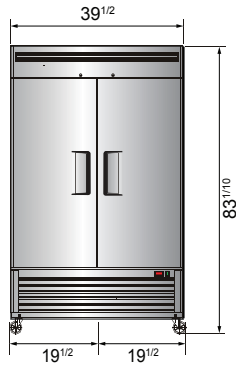

**MBF8503GR**



**MBF8504GR**

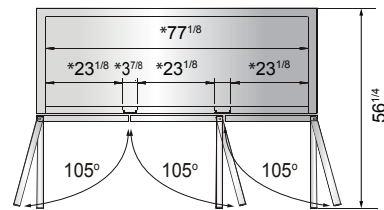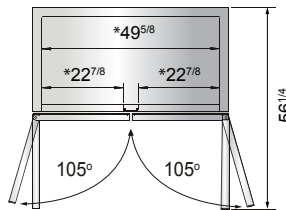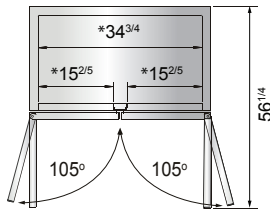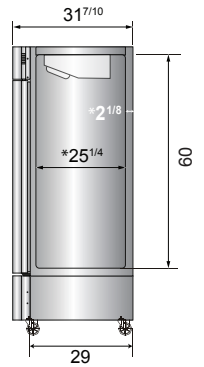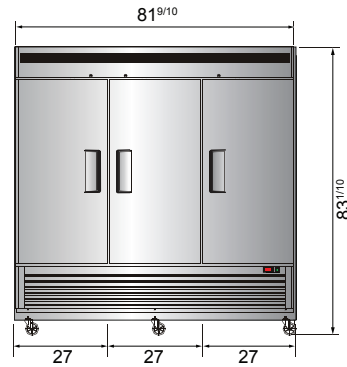

\*Interior Dimensions

SELF-CLOSING AND STAY OPEN DOOR FEATURE

Casters

Epoxy shelves

Door lock

Down duct

Temperature control

MBF8504GR

MBF8501GR  
MBF8503GR

