



# A-SAFE

## Hygiene Guard



### Hygienic clear screen protection for workstations

Hygiene Guard clearly defines and separates individual workstations, helping to reduce the risk of airborne germs, viruses and infections spreading between employees. Easy to maintain and clean, it is ideal for use in confined spaces such as warehouse packing stations. The hygienic polymer supports bolt easily to concrete floors, while the transparent, shock resistant PETG screen provides physical segregation between people without blocking light or reducing visibility between workstations.

Compliant to the  
global benchmark  
in barrier safety

**bsi. PAS 13**  
Code of Practice for  
Workplace Safety  
Barriers

# Engineered for performance

2 height options available

## PETG Sheet

Each guard manufactured with 2 PETG transparent sheets.

2050 x 1250mm

3mm thickness



# Technical Information

## Ease of Install


- Posts easily fixed into concrete.
- PETG Sheet can easily be installed into the posts.



Material Properties	MEMAPLEX™
Temperature range	-10°C to 50°C
Ignition temperature	370°C to 390°C
Flash point	350°C to 370°C
Toxicity	Not Hazardous
Chemical resistance	Excellent - ISO/TR 10358
Weathering stability (Grey Scale)	5/5*
Light stability (Blue Wool Scale)	7/8**
Static rating (Surface Resistivity)	1015 - 1016 Ω
Hygiene seals	No

\* Weathering scale 1 is very poor and 5 is excellent

\*\* Light stability scale 1 is very poor and 8 is excellent

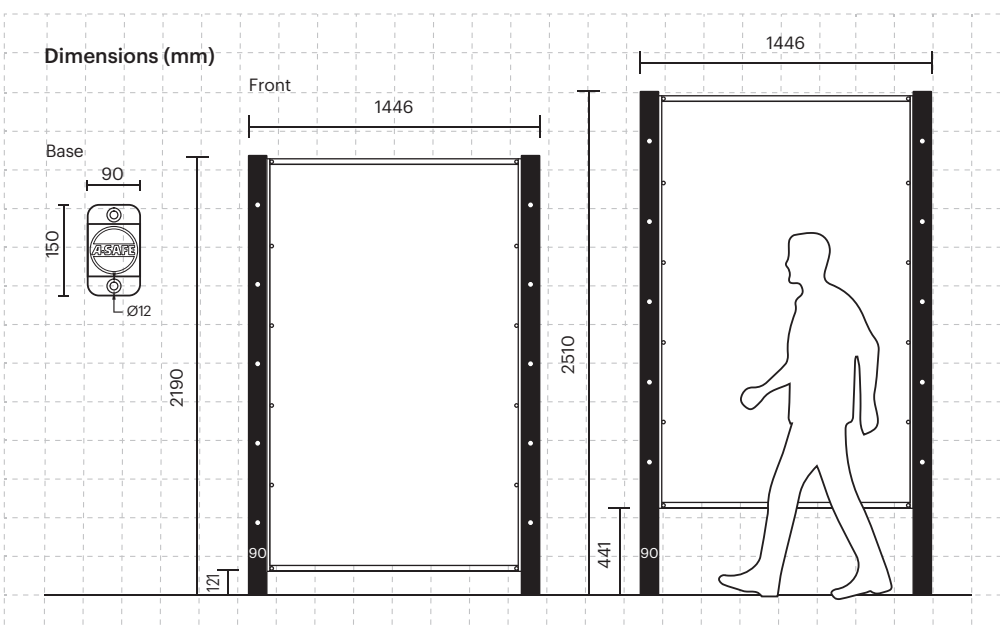

## Colour Combination



\*Please note that the RAL and PANTONE colours listed are the closest match to standard A-SAFE colours, but may not be exact matches of the actual product colour and should be used for guidance only.

