



Toll Free: 877-718-0808  
www.revolveled.com

## LED CANOPY


Energy efficient LED canopy designed to provide high uniformity and excellent vertical light distribution while adding safety and security to perimeter lighting.

- Easy installation, Suitable for J-Box mounting
- Enhance safety and security; ideal lighting for 24hr / 7day locations
- Sealed die-cast white profile for indoor and outdoor applications
- Low glare designed polycarbonate optical lens
- Increase energy savings with bi-level Motion sensor
- IP66 rated, UL/cUL wet location and DLC Premium
- Applications: garages, porches, breezeway, perimeter lighting, entryways




| PART #:             | Wattage               | Lumens  | CCT   | Voltage | DIM   | Weight |
|---------------------|-----------------------|---------|-------|---------|-------|--------|
| RDCP02030304KDNSMLW | 30W                   | 3600 LM | 4000K | 120-277 | 0-10V | 5.3 lb |
| RDCP02030305KDNSMLW | 30W                   | 3600 LM | 5000K | 120-277 | 0-10V | 5.6 lb |
| RDCP02030454KDNSMLW | 45W                   | 5000 LM | 4000K | 120-277 | 0-10V | 5.4 lb |
| RDCP02030455KDNSMLW | 45W                   | 5000 LM | 5000K | 120-277 | 0-10V | 5.4 lb |
| RDCP02030604KDNSMLW | 60W                   | 7000 LM | 4000K | 120-277 | 0-10V | 5.8 lb |
| RDCP02030605KDNSMLW | 60W                   | 7100 LM | 5000K | 120-277 | 0-10V | 5.8 lb |
| Power Factor:       | ≥ 0.9                 |         |       |         |       |        |
| THD:                | ≤ 15%                 |         |       |         |       |        |
| CRI:                | > 70                  |         |       |         |       |        |
| Operating Temp:     | -40°F to 122°F        |         |       |         |       |        |
| Lifetime:           | > 50,000 hr           |         |       |         |       |        |
| Dimensions:         | See Diagram           |         |       |         |       |        |
| Warranty:           | 5 Years               |         |       |         |       |        |
| Certifications:     | UL Wet Certified, DLC |         |       |         |       |        |

Optional PIR Motion Sensor, Emergency Battery Backup

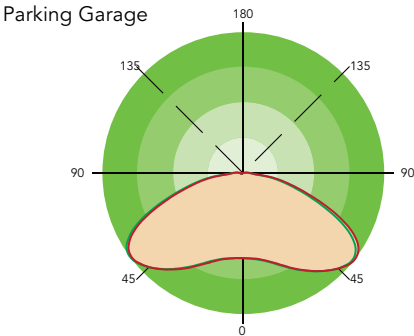

**DIMENSIONS:**  
unit: inch/mm

Weight:  
30W: 5.3lb  
45W: 5.4lb  
60W: 5.73lb

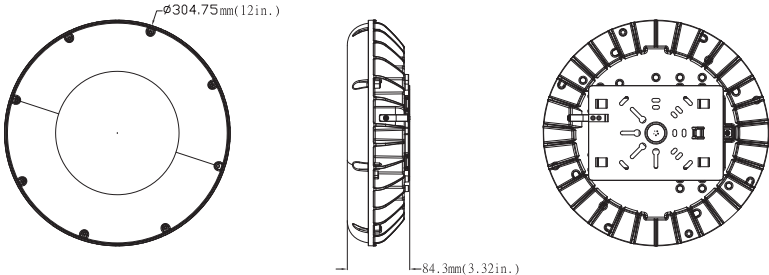

Weight:  
30W: 5.576lb  
45W: 5.686lb  
60W: 6.016lb

