


PLEASE READ INSTRUCTION BEFORE COMMENCING INSTALLATION AND RETAIN FOR FUTURE REFERENCES.

! Electrical products can cause death or injury, or damage to property. If in any doubt about the installation or use of this product, consult a competent electrician

Specifications

Model	GL-HB03-100W50K-BA	GL-HB03-150W50K-BA	GL-HB03-200W50K-BA	GL-HB03-250W50K-BA
Power:	100W	150W	200W	250W
Lumens	14000	21000	28000	35000
Net Weight	6.0LBS	8.7LBS	9.9LBS	11.5LBS
Input Voltage	AC100-277V, 50/60Hz			
Operating Temperature	Not exceeding 45°C			
IP grade:	IP65, suitable for wet location			

Dimensions

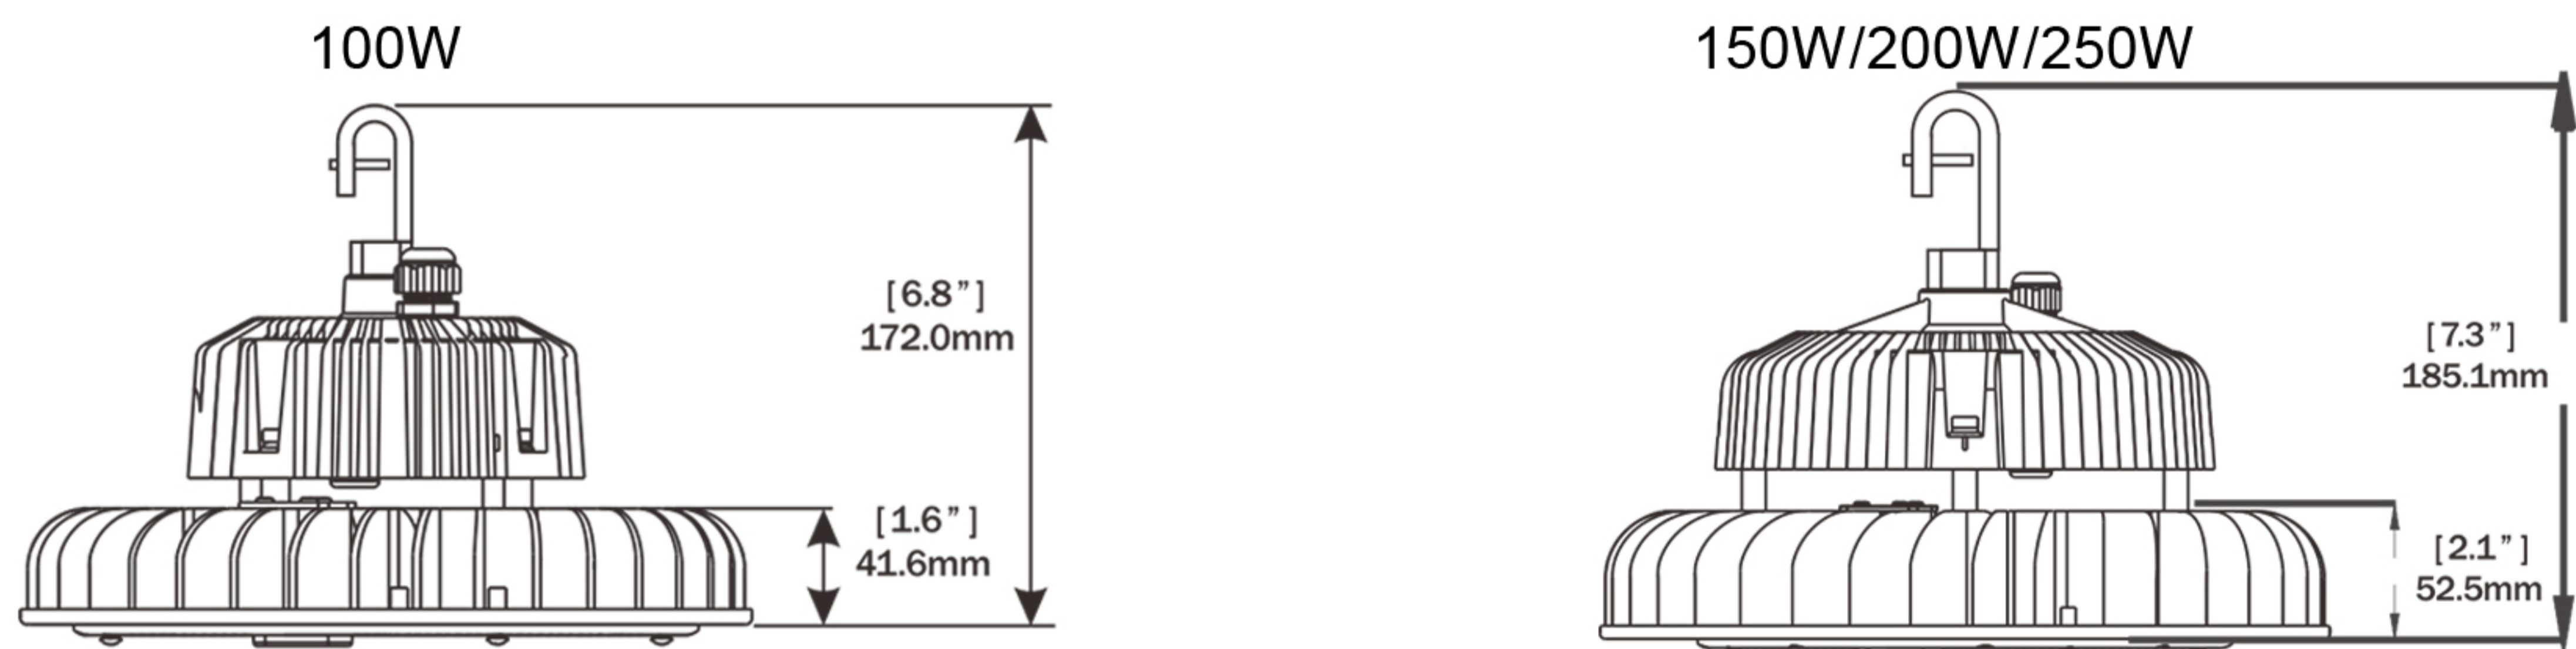

Installation

- 1, The Installation must be carried out by professional electrician.
2. Ensure mains supply is switched off before commencing work.
3. Mark wall with appropriate fixing positions. Before drilling, ensure that the hole does not impinge on pipe work, cables or other building services.
4. The luminaire is supplied with professional cable. Using suitable IP rated enclosure terminate Brown or Black (Live), Blue or White (Neutral) and Green/ Yellow or Green (Ground) to switch supply.

Note: No "fixings screws or chain provided", please use appropriate fixings screws.

Hook Mounting:

