

ACL[®]

Anti-galling Clamps



There is an issue throughout the industry of 'galling' on hygienic clamps. As the clamps are un-lubricated, dissimilar metals must be used to resist the adhesive wear from galling.

ACL has a solution for this; the Anti-galling Clamp. Due to the silicon and manganese content, Nitronic 60 is much more resistant to galling than other stainless steels.


The threaded portions of the clamp can be supplied in most materials that the end-user would require. However, it should be noted that ACL's standard is Nitronic 60 eyebolt with a 304 or 316 nut.

The following options are available from our stock:

- Nitronic 60 standard eyebolt
- Nitronic 60 safety eyebolt
- Nitronic 60 hex nut
- Nitronic 60 safety hex nut

What is 'galling'?

"Galling, or cold welding as it is sometimes referred to, is a form of severe adhesive wear. Adhesive wear occurs between two metal surfaces that are in relative motion and under sufficient load to permit the

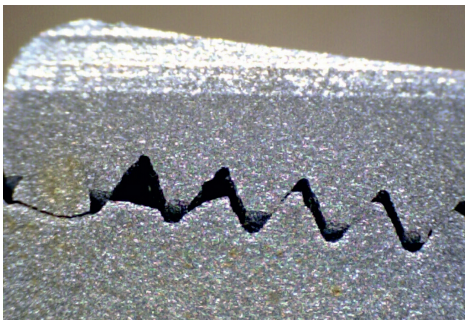

Galled threads (both materials 316)

transfer of material. This is a solid-phase welding process. The load must be sufficient, during relative motion, to disrupt the protective oxide layer covering surface asperities of the metal and permit metal to metal contact. Under high stress and poor lubrication conditions, stronger bonds may form over a larger surface area. Large fragments or surface protrusions may be formed and the result is galling of the surfaces. Severe galling can result in the seizure of metal components.

Materials which are highly ductile or which possess low work-hardening rates tend to be prone to galling. Austenitic stainless steels show a tendency to gall under certain conditions."

Advantages

- Increased service life
- Less likely to gall resulting in forced removal
- Higher resistance to CIP cleaning solution residue
- Increased consistency of torque values after COP
- Reduced particulate generation

Source: BSSA (2018) Improving wear and galling resistance of stainless steels. <https://www.bssa.org.uk/topics.php?article=13> Accessed: 03.12.19

For further information contact:

> PHONE
+44(0)1535 669 216

> FAX
+44 (0)1535 610 243

> EMAIL
sales@advanced-couplings.com

ACL® Anti-galling Clamps

Nitronic 60 Chemical Composition

| Element | Min % | Max % |
|---------|-------|-------|
| C | - | 0.1 |
| Si | 3.5 | 4.5 |
| Mn | 7 | 9 |
| Ni | 8 | 9 |
| Cr | 16 | 18 |
| S | - | 0.03 |
| P | - | 0,04 |
| Mo | - | 0.75 |
| N | 0.08 | 0.18 |
| Cu | - | 0.75 |
| Fe | bal | |

“Nitronic 60 (Alloy 218, UNS S21800) is known for its excellent galling resistance, even at elevated temperatures and low temperature impact resistance. The additions of 4% silicon and 8% manganese inhibit wear, galling and fretting. It is commonly used for various fasteners and pins that require strength and resistance to galling. It maintains decent strength up to temperature of 1800F and has oxidation resistance similar to that of 309 stainless steel. The general corrosion resistance is between that of 304 and 316 stainless steel and the yield strength is twice that of 304 and 316.”

Source: Shanghaimetal (-) Nitronic 60 Round Bar
https://www.shanghaimetal.com/nitronic_60_round_bar
 Accessed 03.12.19

Unlubricated Galling Resistance of Stainless Steels / Threshold Galling Stress in ksi (MPa) Stress at which galling began

| Conditions and Nominal Hardness (Brinell) | Type 410 | Type 416 | Type 430 | Type 440C | Type 303 | Type 304 | Type 316 | 17.4 PH | Nitronic 32 | Nitronic 60 |
|--|------------|------------|----------|------------|------------|------------|----------|------------|-------------|-------------|
| Hardened and Stress Relieved (352) Type 410 | 3 (21) | 4 (28) | 3 (21) | 3 (21) | 4 (28) | 2 (14) | 2 (14) | 3 (21) | 46 (317) | 50 + (345) |
| Hardened and Stress Relieved (342) Type 416 | 4 (28) | 13 (90) | 3 (21) | 21 (145) | 9 (62) | 24 (165) | 42 (290) | 2 (14) | 45 (310) | 50 + (345) |
| Annealed (159) Type 430 | 3 (21) | 3 (21) | 2 (14) | 2 (14) | 2 (14) | 2 (14) | 2 (14) | 3 (21) | 8 (55) | 36 (248) |
| Hardened and Stress Relieved (560) Type 440C | 3 (21) | 21 (145) | 2 (14) | 11 (76) | 5 (34) | 3 (21) | 37 (255) | 3 (21) | 50 + (345) | 50 + (345) |
| Annealed (153) Type 303 | 4 (28) | 9 (62) | 2 (14) | 5 (34) | 2 (14) | 2 (14) | 3 (21) | 3 (21) | 50 + (345) | 50 + (345) |
| Annealed (140) Type 304 | 2 (14) | 24 (165) | 2 (14) | 3 (21) | 2 (14) | 2 (14) | 2 (14) | 2 (14) | 30 (207) | 50 + (345) |
| Annealed (150) Type 316 | 2 (14) | 42 (290) | 2 (14) | 37 (255) | 3 (21) | 2 (14) | 2 (14) | 2 (14) | 3 (21) | 38 (262) |
| H950 (415) 17.4 PH | 3 (21) | 2 (14) | 3 (21) | 3 (21) | 2 (14) | 2 (14) | 2 (14) | 2 (14) | 50 + (345) | 50 + (345) |
| Annealed (235) Nitronic 32 | 46 (317) | 45 (310) | 8 (55) | 50 + (345) | 50 + (345) | 30 (207) | 3 (21) | 50 + (345) | 30 (207) | 50 + (345) |
| Annealed (205) Nitronic 60 | 50 + (345) | 50 + (345) | 36 (248) | 50 + (345) | 50 + (345) | 50 + (345) | 38 (262) | 50 + (345) | 50 + (345) | 50 (345) |

+ Did not gall Current Anti-galling


Note: Condition and hardness apply to both horizontal and vertical axes.

Source: HP Alloys (2011) Nitronic 60 stainless steel bar and wire (UNS-S21800), Windfall, IN: HP Alloys.

ACL® Anti-galling Clamps

Particulate Generation

As Nitronic 60 is more resistant to this mechanism of wear, there is less particulate generated by on / off cycles. This makes the anti-galling clamp a perfect solution for clean room environments. In addition to the reduction of galling, end users can also have a 'cleaner' product.

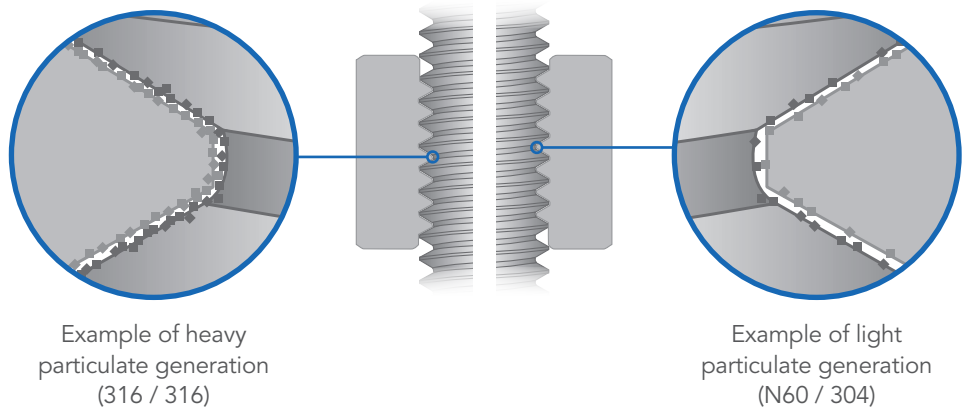

Wear Compatibility of Stainless Steel Couples

| Alloy | Weight Loss (mg/1,000 cycles) | | | | | | |
|-----------------------|-------------------------------|----------|---------|-------------|-------------|-------------|-----------|
| | Type 304 | Type 316 | 17.4 PH | Nitronic 32 | Nitronic 50 | Nitronic 60 | Type 440C |
| Hardness Rockwell vs. | B99 | B91 | C43 | B95 | B99 | B95 | C57 |
| Type 304 | 12.8 | | | | | | |
| Type 316 | 10.5 | 12.5 | | | | | |
| 17.4PH | 24.7 | 18.5 | 52.8 | | | | |
| Nitronic 32 | 8.4 | 9.4 | 17.2 | 7.4 | | | |
| Nitronic 50 | 9.0 | 9.5 | 15.7 | 8.3 | 10.0 | | |
| Nitronic 60 | 6.0 | 4.3 | 5.4 | 3.2 | 3.5 | 2.8 | |
| Type 440C | 4.1 | 3.9 | 11.7 | 3.1 | 4.3 | 2.4 | 3.8 |

Current Anti-galling

Source: HP Alloys (2011) Nitronic 60 stainless steel bar and wire (UNS-S21800), Windfall, IN: HP Alloys.

Quality Assurance

The ACL Quality Management System is certified according to EN ISO 9001:2015. We ensure that our suppliers also maintain a certified Quality Management System.

ACL's anti-galling clamps are European originating goods and are tested in accordance with our strict procedures, ensuring the highest level of reliability and safety.

All technical information and advice given here is based on our previous experiences and/or test results. We give this information to the best of our knowledge, but assume no legal responsibility. Customers are asked to check the suitability and usability in the specific application, since the performance of the product can only be judged when all necessary operating data are available. Specifications are subject to change without notice. ACL's terms and conditions of sale apply to the purchase and sale of the product.

Further Information

For detailed selection criteria, technical information, installation guidelines or to contact ACL, please visit our website:

www.advanced-couplings.com

Issue 1 - Dec 2019

Advanced Couplings Ltd
 Unit 3A, Riverside Business Park, Royd Ings Avenue, Keighley
 West Yorkshire, BD21 4AF, United Kingdom

T: +44(0)1535 669 216
 F: +44 (0)1535 610 243
 E: sales@advanced-couplings.com

Unlubricated Galling Resistance of Several Metal Combinations

| Couple - (Brinell Hardness) | Threshold Galling Stress ksi (MPa) (Stress at which galling began) | Couple - (Brinell Hardness) | Threshold Galling Stress ksi (MPa) (Stress at which galling began) |
|--|--|---|--|
| Waukesha 88 (141) vs. Type 303 (180) | 50 + (345) | Type 201 (202) vs. Type 304 (140) | 2 (14) |
| Waukesha 88 (141) vs. Type 201 (202) | 50 + (345) | Type 201 (202) vs. 17-4 PH (382) | 2 (14) |
| Waukesha 88 (141) vs. Type 316 (200) | 50 + (345) | Type 410 (322) vs. Type 420 (472) | 3 (21) |
| Waukesha 88 (141) vs. 17-4 PH (405) | 50 + (345) | Type 304 (140) vs. AISI 1034 (205) | 2 (14) |
| Waukesha 88 (141) vs. 20 Cr-80 Ni (180) | 50 + (345) | Type 304 (337) vs. Type 304 (337) | 2 (14) |
| Waukesha 88 (141) vs. Type 304 (207) | 50 + (345) | Type 304 (207) vs. Type 304 (337) | 2 (14) |
| Silicon Bronze (200) vs. Silicon Bronze (200) | 4 (28) | Duplex 2205 (235) vs. Type 303 (153) | 2 (14) |
| A-286 (270) vs. A-286 (270) | 3 (21) | Duplex 2205 (235) vs. Type 304 (270) | 2 (14) |
| Nitronic 60 (205) vs. A-286 (270) | 49 + (338) | Duplex 2205 (235) vs. Type 316 (150) | 2 (14) |
| Nitronic 60 (205) vs. 20 Cr-80 Ni (180) | 36 (248) | Duplex 2205 (235) vs. Type 416 (342) | 2 (14) |
| Nitronic 60 (205) vs. Ti-6Al-4V (332) | 50 + (345) | Duplex 2205 (235) vs. 17-4 PH (415) | 2 (14) |
| AISI 4337 (484) vs. AISI 4337 (415) | 2 (14) | Duplex 2205 (235) vs. Nitronic 60 (210) | 30 (207) |
| AISI 1034 (415) vs. AISI 1034 (415) | 2 (14) | IN 625 (215) vs. Type 303 (153) | 2 (14) |
| Nitronic 60 (205) vs. AISI 4337 (448) | 50 + (345) | IN 625 (215) vs. Type 304 (270) | 2 (14) |
| Nitronic 60 (205) vs. Stellite 6B (415) | 50 + (345) | IN 625 (215) vs. Type 316 (161) | 2 (14) |
| Nitronic 32 (234) vs. AISI 1034 (205) | 2 (14) | IN 625 (215) vs. 17-4 PH (415) | 2 (14) |
| Nitronic 32 (231) vs. Type 201 (202) | 50 + (345) | IN 625 (215) vs. Nitronic 60 (210) | 33 (227) |
| Nitronic 60 (205) vs. 17-4 PH (322) | 50 + (345) | Stellite 21 (270) vs. Type 316 (161) | 2 (14) |
| Nitronic 60 (205) vs. Nitronic 50 (205) | 50 + (345) | Stellite 21 (270) vs. Nitronic 50 (210) | 2 (14) |
| Nitronic 60 (205) vs. PH 13-8 Mo (297) | 50 + (345) | Stellite 21 (270) vs. Nitronic 60 (210) | 43 + (297) |
| Nitronic 60 (205) vs. PH 13-8 Mo (437) | 50 + (345) | K-500 Monel (321) vs. Type 304 (270) | 2 (14) |
| Nitronic 60 (205) vs. 15-5 PH (393) | 50 + (345) | K-500 Monel (321) vs. Type 316 (161) | 2 (14) |
| Nitronic 60 (205) vs. 15-5 PH (283) | 50 + (345) | K-500 Monel (321) vs. 17-4 PH (415) | 2 (14) |
| Nitronic 60 (205) vs. 17-7 PH(404) | 50 + (345) | K-500 Monel (321) vs. Nitronic 50 (245) | 2 (14) |
| Nitronic 60 (205) vs. Nitronic 40 (185) | 50 + (345) | K-500 Monel (321) vs. Nitronic 60 (210) | 17 (117) |
| Nitronic 60 (205) vs. Type 410 (240) | 36 (248) | Nitronic 60 (210) vs. Tribaloy 700 (437) | 45 + (310) |
| Nitronic 60 (205) vs. Type 420 (472) | 50 + (345) | Stellite 68 (450) vs. Type 316 (61) | 8 (55) |
| Nitronic 60 (210) vs. Type 201 (202) | 46 + (317) | Stellite 68 (450) vs. Type 304 (150) | 47 + (324) |
| Nitronic 60 (210) vs. AISI 4130 (234) | 34 (234) | Stellite 68 (450) vs. Nitronic 60 (210) | 50 + (345) |
| Nitronic 60 (205) vs. Type 301 (169) | 50 + (345) | Type 410 (210) vs. Type 410 (210) | 2 (14) |
| Type 440C (600) vs. Type 420 (472) | 3 (21) | Type 410 (363) vs. Type 410 (363) | 2 (14) |
| Type 201 (202) vs. Type 201 (202) | 20 (137) | Type 410 (210) vs. Type 410 (363) | 2 (14) |
| Nitronic 60 (205) vs. Cr plated Type 304 | 50 + (345) | 17-4 PH (H1150 + H1150) (313) vs. 17-4 PH (H1150 + H1150) (313) | 2 (14) |
| Nitronic 60 (205) vs. Cr plated 15-5PH (H1150) | 50 + (345) | Type 410 (210) vs. 17-4 PH (H1150 + H1150) (313) | 2 (14) |
| Nitronic 60 (205) vs. Inconel 718 (306) | 50 + (345) | Nitronic 60 (210) vs. 17-4 PH (H1150 + H1150) (313) | 21 (145) |
| Nitronic 60 (205) vs. CP Titanium (185) | 47 + (324) | Nitronic 60 (210) vs. Type 410 (210) | 24 (165) |
| Nitronic 60 (205) vs. Ni Resist Type 2 (145) | 50 + (345) | | |
| Nitronic 60 (205) vs. Stellite 21 (295) | 43 + (296) | | |

+ Did not gall

Source: HP Alloys (2011) Nitronic 60 stainless steel bar and wire (UNS-S21800), Windfall, IN. HP Alloys.