





CH Rigid Height Adjuster

- Fine tune slope for process lines to achieve full drainability
- Adjustment range of up to 1" above and below midpoint setting, providing a total of 2" of travel distance
- Installers will not need to use temporary supports, therefore, reducing installation time
- Components of adjuster are captive so will not come apart
- Economical option in comparison to standard stanchions, where permitted
- Convenient wrench flats for easy field adjustment
- If needed, a simple tack weld will secure the elevation
- Designed to be used with our CHT rounded supports with a threaded connection
- **ASME BPE** Compliant – no exposed threads, drainable geometry

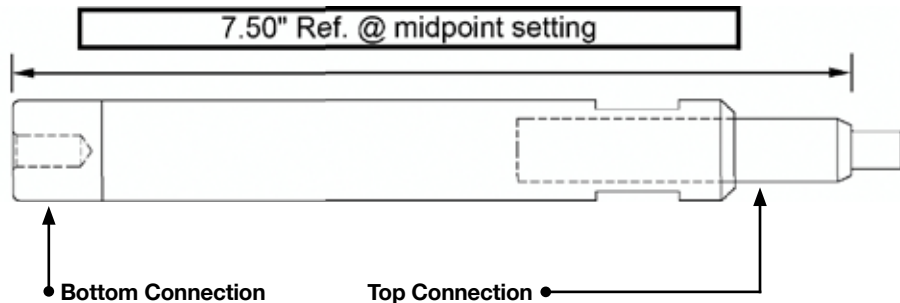

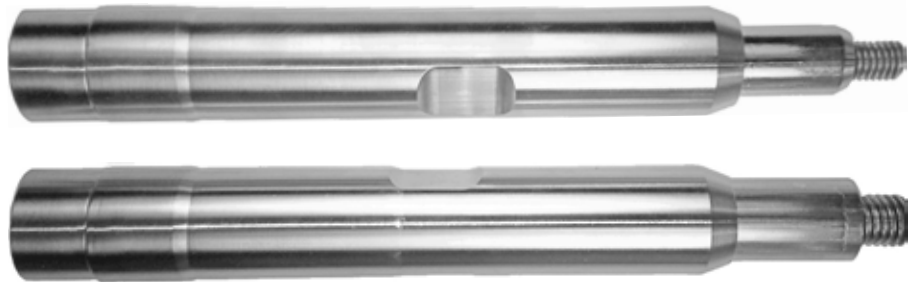

| | |
|------|------------|
| 038F | 3/8-16 UNC |
| 050F | 1/2-13 UNC |
| 075F | 3/4-10 UNC |

| | | |
|------|------------|----------------|
| 038M | 3/8-16 UNC | Group 1-7 CHT |
| 050M | 1/2-13 UNC | Group 8-8A CHT |
| 075M | 3/4-10 UNC | Group 9 CHT |

Part Number Configuration

| | | | | | | |
|---------------|---|-------------------|---|----------------|---|----------|
| Adjuster Type | - | Bottom Connection | - | Top Connection | - | Material |
| CHADJ | | 038F | | 038M | | T=304 |
| | | 050F | | 050M | | X=316 |
| | | 075F | | 075M | | |

Inventory Items

| |
|-------------------|
| CHADJ-038F-038M-T |
| CHADJ-050F-038M-T |
| CHADJ-050F-050M-T |
| CHADJ-075F-075M-T |

Rigid Height Adjuster Support Assembly with Integral Stanchion Cap

Contact factory for specifications and pricing.

