		Project Name:			AIA#:	
	Model #:		Location:			
IS#:		I+,	em #:	Quantity:		
10#		ne	ziii #	Quaritity.	—	



15.5" Wide | 4 Tubes - 120,000 BTU | 50 lb. Oil Capacity

50 pound oil capacity, perfect for mid to high volume basket frying,

with fast recovery for breaded/battered product. An extension of Globe's gas countertop cooking line — quality design, durability, performance and price!









Models

☐ GFF50G - Natural Gas Model (pictured) ☐ GFF50PG - Liquid Propane Model

Standard Features


- Stainless steel fully peened fry tank with smooth, polished welds
- Large foam zone, prevents excessive moisture in the oil which can adversely affect flavor
- Efficient 576 sq. inches BTU heat exchanger tubes
- Rugged cast iron burners 30,000 BTUs per tube
- Specialty high heat baffles inside the heat tubes for improved heating efficiency
- Robertshaw® millivolt gas valve and thermostat 200-400 degrees
- 1-1/4" full ball-type port drain with extension pipe for quick and easy cleaning
- Large cold zone prolongs oil life, prevents food particle carbonization
- High limit thermostat, with auto gas supply shut-off
- Sturdy 2.5" dia. 6" adjustable stainless steel legs — one set of 4 casters included!
- Heavy-duty stainless steel double rod basket hangers
- Stainless steel front and door with integral liner, galvanized sides
- Full length door rod and fully welded door magnet
- Includes twin nickel chrome wire mesh fry baskets with plastic coated handles (13.625" x 6.5" x 5.75" ea.)
- Includes drain extension pipe, basket support rack, stainless steel legs, set of 4 casters

Warrantv

- Two years parts and labor
- Two years tank full fryer replacement

Approved by:



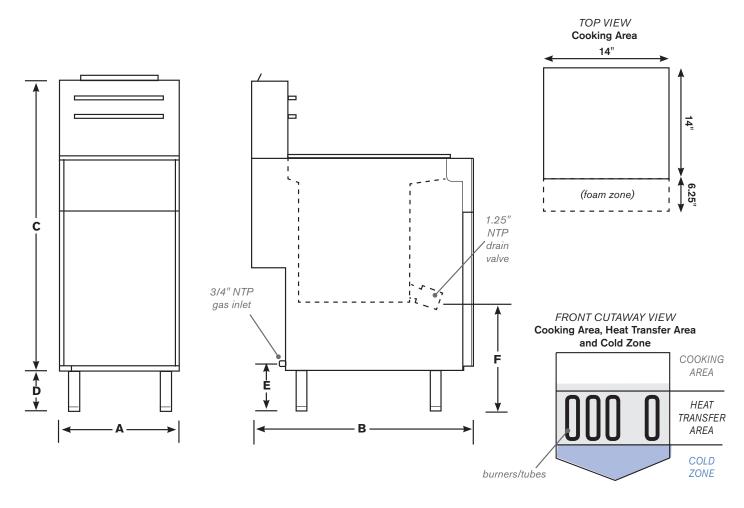

For indoor commercial use only.

DIMENSIONS | SPECIFICATIONS | SHIPPING INFORMATION Reinforced carton for shipping. Weight of carton included below, may vary from shipment to shipment. Shipped on a pallet, freight class 85. **Dimensions** Ship Oil No. Burners Total Net Model F - Drain Valve **Cooking Area** Capacity BTUs ea **BTUs** Wt Wt Width Depth Height Gas Inlet Height Legs Height **Height From Floor** GFF50G 149 lbs 192 lbs 6" 15.5" 30.3" 47.2" 10.25" 14" x 14" 50 lbs 120,000 GFF50PG (39 cm) (26.04 cm) (67.6 kg) (87 kg) (68 cm) (15.24 cm) (17.78 cm) (35.6 cm x 35.6 cm) 30,000 (77 cm) (16 kg)

GAS REQUIREMENTS AND INFORMATION

- Natural gas or LP main supply required
- Conversion of unit from natural gas to LP must be completed by an authorized Globe servicer
- 3/4" standard pipe size I.D. connection
- With LP gas we recommend an additional gas regulator (owner supplied) be placed between fryer and gas tank
- Must be installed 6" from flammable surfaces

Gas fryer has fully peened stainless steel fry tank with stainless steel front plate, door and frame. Large foam zone and 1-1/4" full ball-type port drain, with ample cold zone and built in flue deflector. Unit supplied with drain valve, drain extension pipe, 2 nickel chrome wire mesh fry baskets with plastic handles, 6" adjustable legs and set of 4 casters. Fryer has high performance cast iron burners, 4 totaling 120,000 BTUs, Robertshaw® thermostat, high heat limit with auto gas shut-off. Unit shall have a welded magnet for extra door support, galvanized sides, recessed handle and double rod stainless basket hanger. Fryer is CSA listed. Two-year tank warranty (full fryer replacement) and two-year parts and labor.