



MODELS

KGH-ES-(30, 40, 50, 60, 80,100)-S

GRAB-N-GO HIGH PROFILE CASE WITH ELECTRIC SHUTTER

CASE HOLDS 36°F TO 40°F • KEY OPERATED ELECTRIC LOCKING SHUTTER
FORCED AIR REFRIGERATION • OPEN FRONT
FRONT LOADING • LED LIGHTING IN CANOPY AND UNDER SHELVES



AUTODESK®
REVIT®


SELF CONTAINED	Model	Width (inches)	Capacity FT ³	Electrical					Weight lbs		Crate Size (inches)			
				Compressor			Total Amps 115V	Amps 230 V	DWTg[dW : SdV] [dW : SdV] [dW : SdV]	Net Weight	Ship Weight	L"	W"	H"
				H.P	F.L.A 115V	F.L.A 230V								
	KGH-ES-30-S	29.2	15.9	3/4	16.0	N/A	20.7	N/A	1x 115V	417	527	32	32.5	92
	KGH-ES-40-S	41	23.3	1	16.2	N/A	26.3	N/A	1x 115V	509	653	44	32.5	92
	KGH-ES-50-S	50.2	29.1	1	16.2	N/A	27.0	N/A	1x 115V	564	736	53	32.5	92
	KGH-ES-60-S	60.6	35.6	1-1/4	N/A	9.2	10.8	9.2	1x 115V + 1x 220V	666	842	64	32.5	92
	KGH-ES-80-S	78.2	46.6	2 x 1	N/A	2 x 8.2	11.2	16.4	1x 115V + 1x 220V	811	1062	82	32.5	92
	KGH-ES-100-S	96.6	58.2	2 x 1	2 x 16.2	N/A	21.5	16.4	1x 115V + 1x 220V	1047	1444	99.6	32.5	92

STANDARD FEATURES

- Key operated electric shutter
- Tempered side glass
- CFC free injected foam insulation
- Silver colored PVC coated steel front panel
- PVC coated steel gray interior
- PVC coated dark gray anthracite kick plate
- Foamed PVC coated steel black end panels
- Height adjustable shelves can be tilted
- Products stop on all shelves
- Temperature and defrost regulated by a digital controller
- Removable condensate evaporating pan for easy cleaning
- Slide out condensing unit
- Digital thermometer
- Levelling feet

OPTIONAL FEATURES

- Stainless steel interior and / or exterior
- Other colors available
- Solid or full view end panels
- Additional shelves
- Partition and or / product dividers
- Price tag molding
- Casters add 4-3/8" to height
- Stainless steel legs are adjustable from 5-1/8" to 7-5/8"

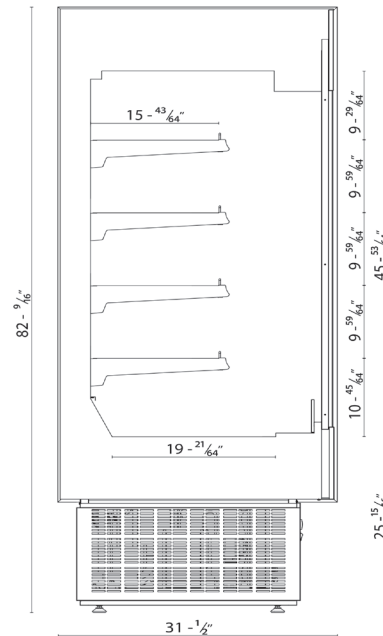

NOTE

These cases are engineered to operate in locations not exceeding 75°F and 55% R.H. These cases are designed to operate using R452a refrigerant. Alternate refrigerants available by special order. O.A. length includes (2) ends at 1-1/2" each. Ventilation grills at front and back cannot be blocked. B.T.U.'s are calculated at 14°F (evaporator) and 90°F (ambient).

Standard Mounting



Levelling Feet

Optional Mounting



Adjustable Legs



Casters



3560 NW 56th St
Fort Lauderdale, FL USA 33309
Tel: 786.600.4687 / Toll Free: 844.218.8477 / Fax: 786.661.4100



5659 Royalmount Ave.
Montreal, QC, Canada H4P 2P9
Tel: 514.737.9701 / Toll Free: 888.275.4538 / Fax: 514.342.3854
Toll free: 877.453.8832
sales@mvpgroupcorp.com / mvpgroupcorp.com

WARRANTY

One year parts and labor with an additional four years on the compressor (part only)



Hydra - Kool is a registered trademark of MVP Group Corp.
SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE