


Product Description

- Suitable for general office and data centre installation
- Secure Screw clamp installation and built in lid strap
- Manufactured from High Grade flame retardant engineering plastics/ABS
- Cable opening dimensions: 83mm x 34mm
- Galvanised steel back box
- 20mm knockouts
- Fitted with 13A UK Socket
- 2 x LJ6C module spaces
- Also available with 5 amp & 16 amp European socket

Note: Not recommended in walkways or in areas which may cause a trip hazard.

Specifications

Model:	PG003G-SF
Overall Diameter:	140mm
Cutout:	127mm
Cable Entry:	83x34mm
Floor Depth required:	96mm (min)
Flange Thickness:	5mm
Power:	13A UK Socket
Data:	2 x LJ6C Spaces
Colour:	Grey

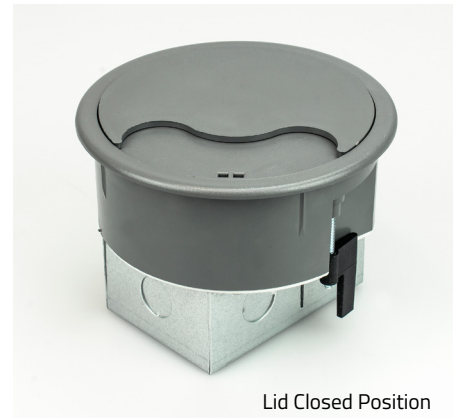

Customer Notice: PG003G-SF Power Grommet is not suitable for screed and concrete floors. please see our Stainless Steel Power Grommet for screed and concrete floor installations.

Contact: sales@floorbox.co.uk | **Visit:** www.floorbox.co.uk

Customer notice: Due to our policy of continuous improvement, Tass Cable Management Ltd reserve the right to change product specifications without notice. Tass Cable Management Ltd © | Floorbox.co.uk © | 2023 | All rights Reserved.