




Product Description

- Made from galvanised and stainless steel
- fitted with 20mm Cam lock (supplied with 2 keys)
- Designed for use with TFB3s Floor box and TSB2/75 Screed box
- Lifting handle with cable flap
- 12mm recess, ideal for ceramic tiles, laminate floors or thick carpets.
- Designed specifically for high traffic environments such as schools, colleges and many other uses
- Steel frame and lid designed to withstand loads up to 740kg

Specifications

Model:	SSL12R296/LL
Overall Dimensions:	280mm x 230mm
Recessed Area:	241mm x 148mm
Colour:	Stainless Steel
Availability:	TFB3s, TSB2/75
Lid Recess:	12mm
Outer Flange:	15mm
Overall Depth:	32mm

Frame & Lid Profile View

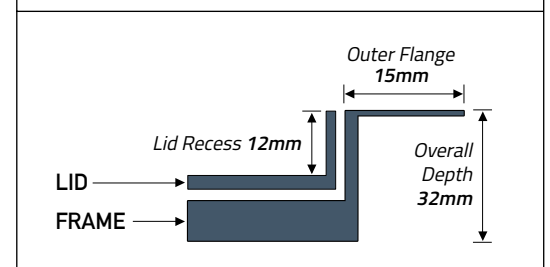

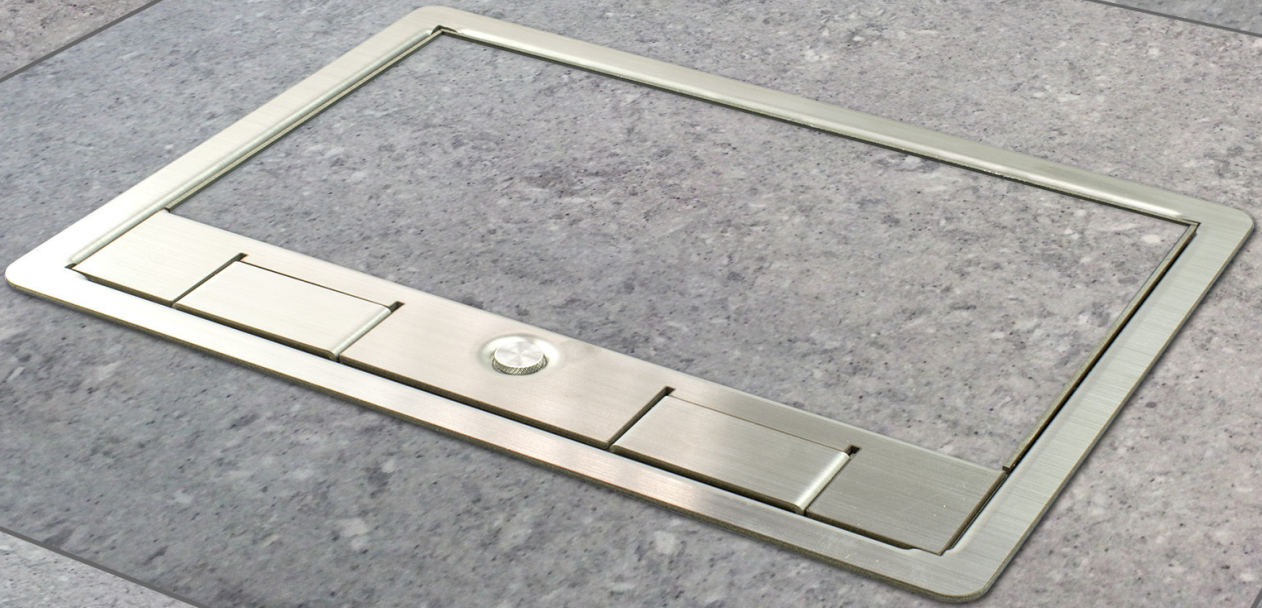


Illustration showing model: SSL20R281 (20mm Recessed Lid)

Stainless Steel Frame & Lid Options

- 12mm & 20mm lid recess options available
- Designed specifically for high traffic environments
- Steel frame and lid designed to withstand loads of upto 740kg



Illustration showing model: SSL12R281 (12mm Recessed Lid)