


MODEL: ST0291RCD/GB Plate - Latching Type

Suitable for use: TFB3/80, TFB3/90 & TSB3/80

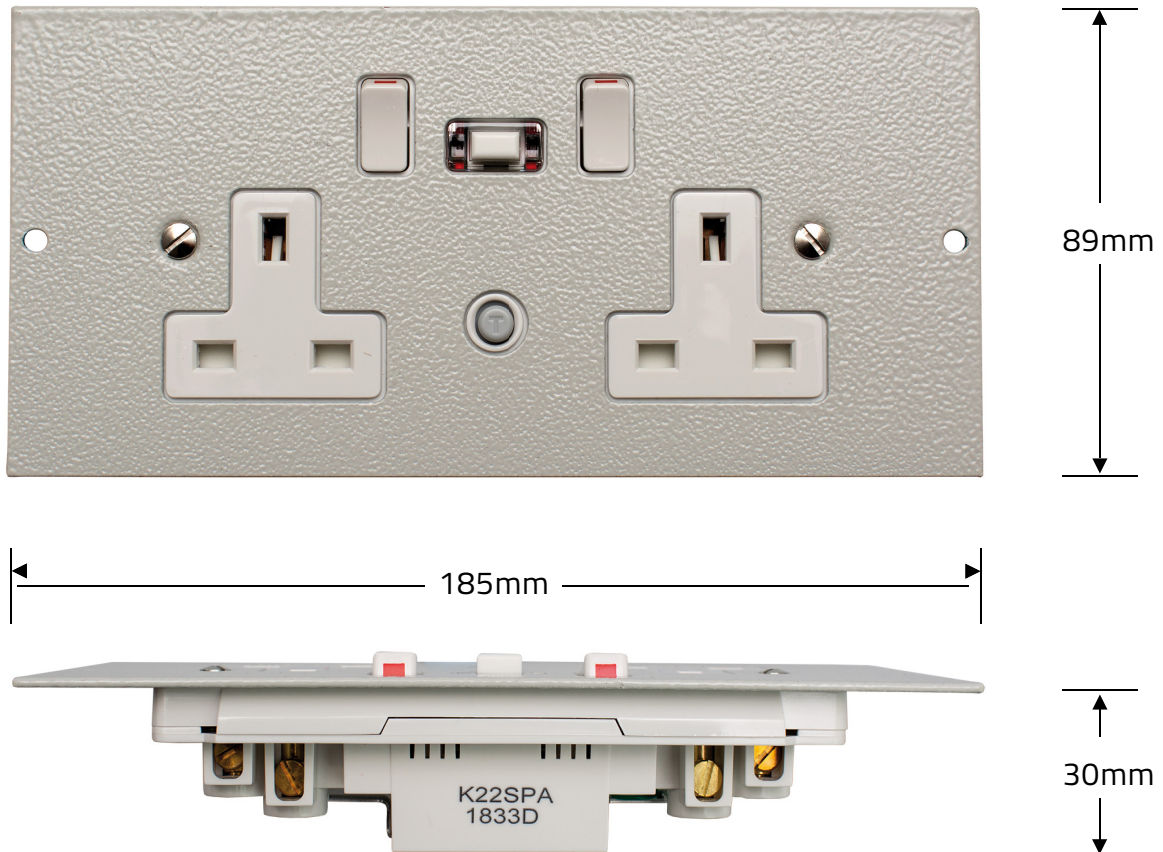

Technical Information

Plate Dimensions	185 x 89mm	Associated Standards	BS7288-2016 + A1:2022 BS 1363-2:1995 BS EN 61543:1995 / RHoS / CE
Plate Colour	Light Grey (RAL: 7035)	Fault Current Rating (mA)	30mA
Socket Depth (below plate)	30mm	Tripping Speed	Less than 20mS (typical)
Housing Material	Polycarbonate	Latching	Mechanical (Passive)
No. of Outlets	2	Resoponsive to	Pulsating DC Earth Faults
Indicator Lamp	High Intensity LED Power on Indicator	Terminals	(Twin earth Terminals) L, N, E
Switched	Yes	Nature of Supply	AC
Rocker Finish	White Moulded	RCD Contact Break	Double Pole
Rated Current	13A max	Cable Capacity	5mm
Rated Frequency	50 Hz	Screws included	Yes
Rated Voltage	230V		

Note: Due to the sensitive electronics used within the USB & RCD sockets it is important to make sure the sockets are installed in a clean and dust free environment.

Disclaimer: Due to our policy of continuous improvement, Tass Cable Management Ltd reserve the right to change product specifications without notice.