


MODEL: ST0300/RCD/BG PLATE - Latching Type

Suitable for floorboxes and screedboxes with Box depths of 80mm or above.

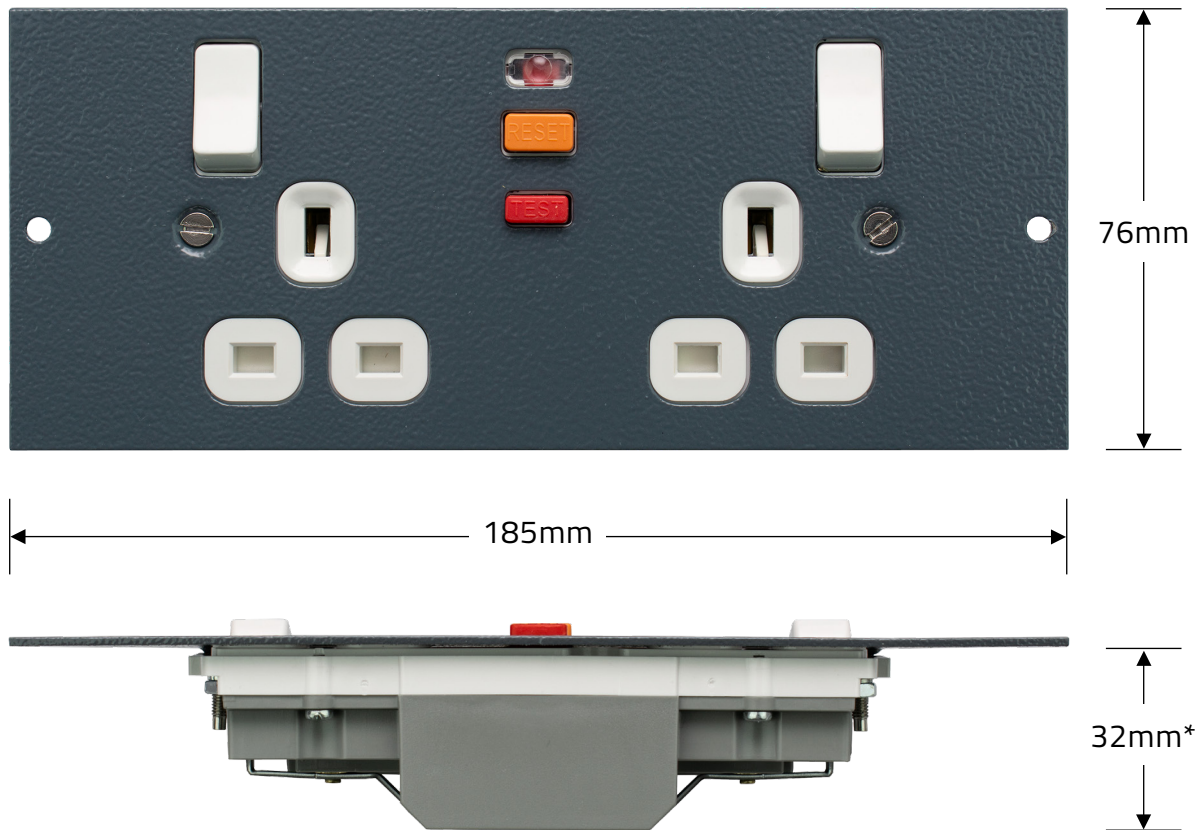

* Below Plate Socket Depth

Technical Information

Plate Dimensions	185 x 76mm	Associated Standards	BS 7288:1990 / BS 1363-2
Plate Colour	Dark Grey (RAL: 7031)	Fault Current Rating (mA)	30mA trip speed @ 40 ms
Socket Material	Thermoset (Moulded)	Max Load	3120 watts 240V AC
No. of Outlets	2	IP Rating	IP2X
Rocker Finish	White Moulded	Max. Installation Altitude	2000m
Switched	Yes (Single Pole)	Min. Switch Contact Gap	3mm
Earthing	Dual Earth	Min. Wall Box Depth	35mm
Rated Current	13A	Nature of Supply	AC
Rated Frequency	50-60 Hz	Operational Testing	30,000
Rated Voltage	250V	Ambient Operating Temp.	-5 to 40°C (24 Hour average not exceeding 35°C)
Terminal Capacity	3 x 2.5mm ² , 3 x 4 ² mm ² , 2 x 6 ² mm ²		

Note: Due to the sensitive electronics used within the USB & RCD sockets it is important to make sure the sockets are installed in a clean and dust free environment.

Disclaimer: Due to our policy of continuous improvement, Tass Cable Management Ltd reserve the right to change product specifications without notice.