


MODEL: STO300/USB (Plate Specifications)

Description: Moulded Panel mounted Twin Switched Sockets with USB

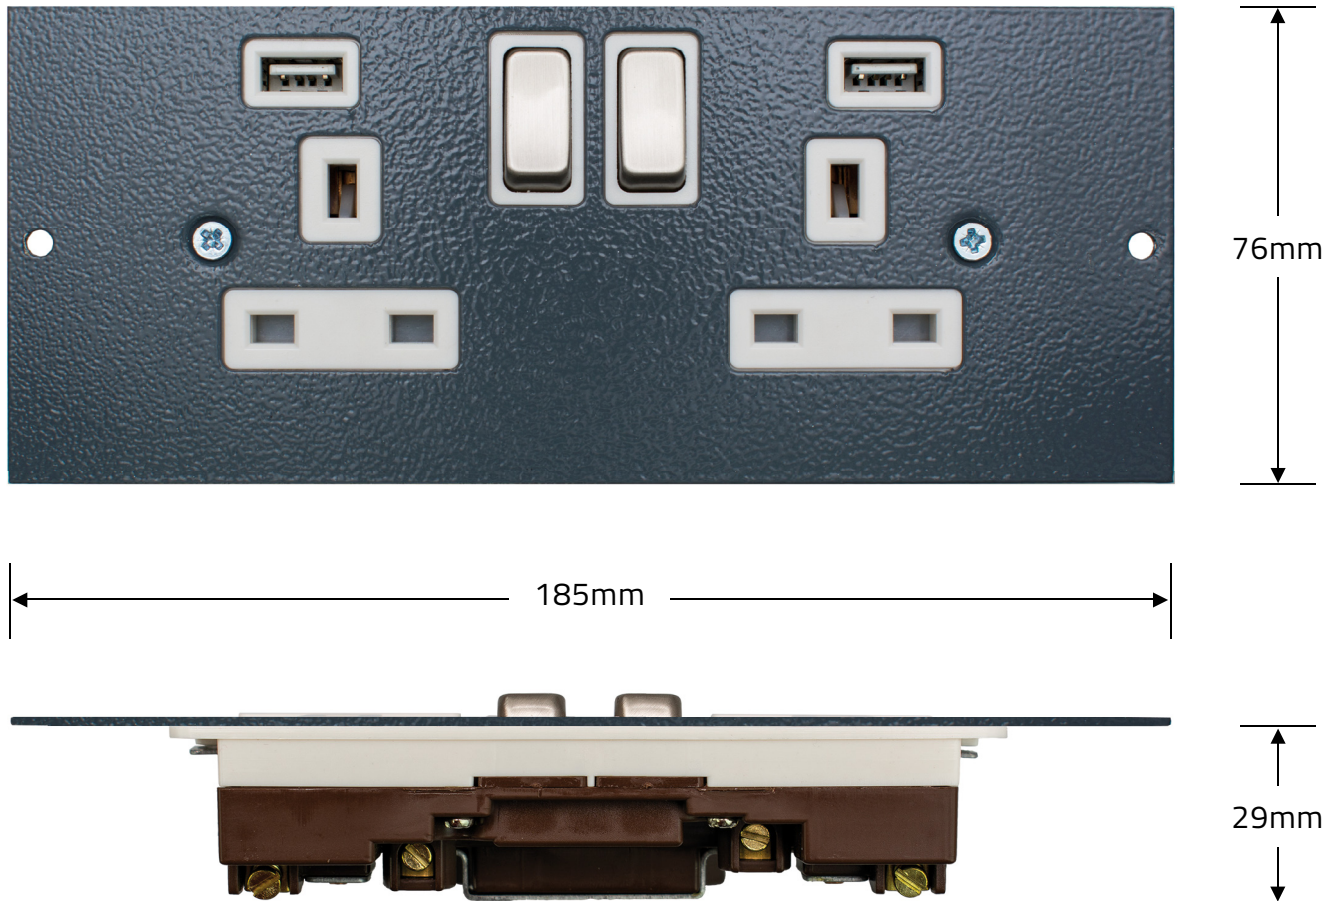

Technical Information

Socket Dimensions	185 x 76mm	Manufactured to	BS1363 / BS5733 / EN60950-1
Socket Depth (below plate)	29mm	Working Temperature	-15°C to 40°C
Housing Material	Polycarbonate	Dual Earth	Yes
No. of Outlets	2	Terminals	(Twin earth Terminals) L, N, E
Switched	Yes	Cable Capacity	5mm
Rocker Finish	Brush Stainless Steel	Nature of Supply	AC
Rated Current	13A max	USB Ports	2
Rated Frequency	50 Hz	USB Output	2.1Amps / 1Amp , 5V
Rated Voltage	250V		

Note: Due to the sensitive electronics used within the USB & RCD sockets it is important to make sure the sockets are installed in a clean and dust free environment.

Disclaimer: Due to our policy of continuous improvement, Tass Cable Management Ltd reserve the right to change product specifications without notice.