

Flush Mounted Modular Desk Power


Tass Cable Management Ltd



Model	Description	Power	USB Charger	Module Spaces	Cutout Size
FM2/46CU	2 Power 2 USB 4 Module (LJ6C) Flush Mount	2 x UK Sockets Fused at 5A	USB Type A & C	4 x LJ6C Spaces	(L) 370 x (W) 63mm
FM4/46CU	4 Power 2 USB 4 Module (LJ6C) Flush Mount	4 x UK Sockets Fused at 5A	USB Type A & C	4 x LJ6C Spaces	(L) 500 x (W) 63mm

Product Description

- Finished in Black and Grey
- Individually fused to BS6396: 2008.
- UK sockets individually Fused at 5A (20mm 5A Glass Fuse)
- USB Type A & C Smart chargers (QC3.0, PD 18W Max)
 - USB-A QC 3.0, 2V/5A, 5V/3A & 9V/2A
 - USB-C PD, 2V/5A, 5V/3A & 9V/2A.
 - Combined at 5V gives a constant 3.4A each
- 3 Pin input and output connectors
- 4 x 6C Module spaces, ideal for connecting a variety of audio visual and other devices
- Ratchet clamp system, fits desktops from 25-90mm
- Power cords fitted with 13A UK Plugs, available in various lengths are sold separately:
 - Cable Specifications:** 3 Core 1.5mm² 16amp rating

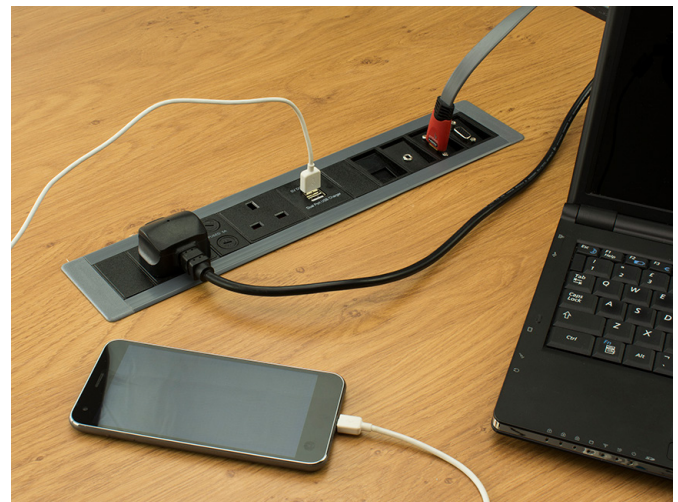

* Modules sold seperately

Audio Visual & Data Options for On-Desk Power Hubs with Module Spaces

P-VGA



P-HDMI



P-USB



P-CAT6



P-A3.5

Model	Description	Power	Data / Type	Dimensions
P-VGA	VGA Coupler Module	-	LJ6C	(37x22mm)
P-HDMI	HDMI Coupler Module	-	LJ6C	(37x22mm)
P-USB	USB Coupler Module	-	LJ6C	(37x22mm)
P-CAT6	Cat6 Module (Compatible with Cat5e Leads)	-	LJ6C	(37x22mm)
P-A3.5	Audio Coupler Module	-	LJ6C	(37x22mm)



PC#

Power Start leads for Flush Mounted Desk Power

Model	Description	Length
PC1	Power Lead - 13A UK Plug to 3 Pin Connector	1 metre
PC2	Power Lead - 13A UK Plug to 3 Pin Connector	2 metre
PC3	Power Lead - 13A UK Plug to 3 Pin Connector	3 metre
PC4	Power Lead - 13A UK Plug to 3 Pin Connector	4 metre
PC5	Power Lead - 13A UK Plug to 3 Pin Connector	5 metre