

Model shown:
TFB4/80-RCD2 (Combined)

Product Description

- Floor box manufactured from galvanised steel
- 25 & 20mm knockouts to accept flexible conduit
- Frame & lid moulded from high impact polycarbonate (RAL7031)
- Fitted with dual twin switched RCD socket plate as standard
- Available with LJ6C or EURO module plate combinations
- Galvanised lid insert for strength
- Easy grip recessed lifting handle
- Clamp fixing for fast installation
- Suitable for carpeted floors only with standard Frame & Lid
- ABS Plastic Frame & Lid Load Test 550 KG
- Steel Frame & Lid Load Test 740 KG

Specifications


Floor Cut Out:	303mm x 221mm
Depth:	80mm
Plug Top Clearance:	30mm
Overall Frame & Lid:	313mm x 230mm
Frame Lid Recess:	6mm
Accessory Plates:	Custom

Configuration Options




Model: TFB4/80-RCD2 (LJ6C)

Configured with optional 2 x 4 way Data Plate STO285/2

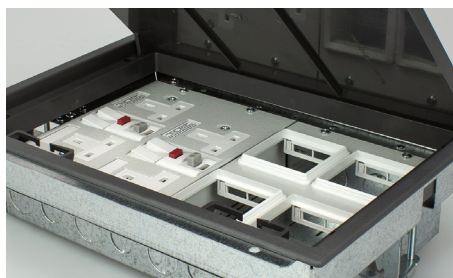

Model: TFB4/80-RCD2 (EURO)

Configured with optional Dual EURO Plate STO279/2

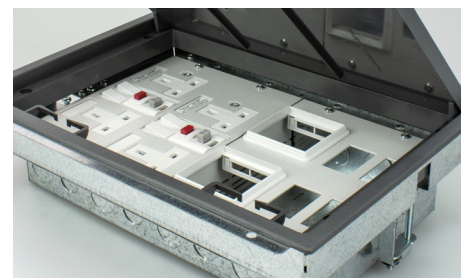

Model: TFB4/80-RCD2 (COMBINED)

Configured with optional combined EURO & 4 Way LJ6C Data Plate STO279/285

Frame & Lid Options for TFB4/80-RCD2

Designed specifically for high traffic environments such as schools and colleges.



PCL12R281

12mm Recessed Powder Coated Steel



SSL12R281

12mm Recessed Stainless Steel

Plug Top Clearance Diagram

