




## TFB4 / TSB4 Socket Configuration Diagrams

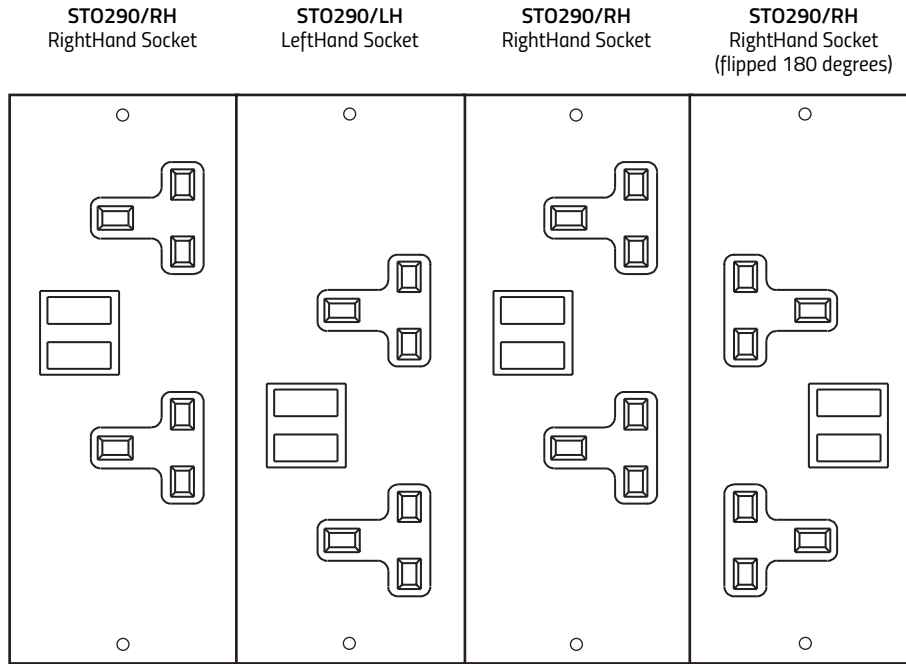

\* 4 x Twin Switched Sockets fitted

### \* Advisory Notice


To Install 4 twin sockets within a 4 compartment floor box the moulded plug tops must not exceed 48mm in width and 70mm including strain relief section in length. Plug tops which are larger will Need to be changed or an alternative floor box arrangement sought.

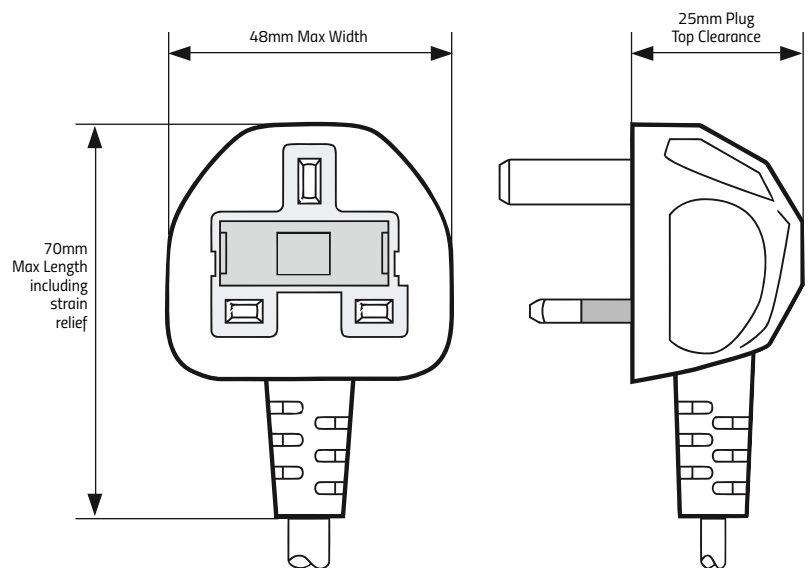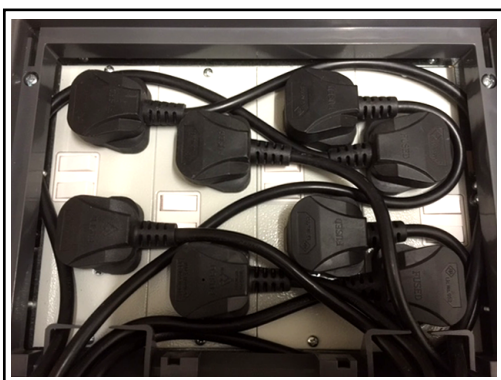

Please note: Diagrams shown above are not to scale and are for illustration purposes only.


Advisory notice: Tass recommend the installation of only 3 twin sockets allowing Ease of use and less congested wiring.

## TFB4 / TSB4 Socket Configuration Diagrams

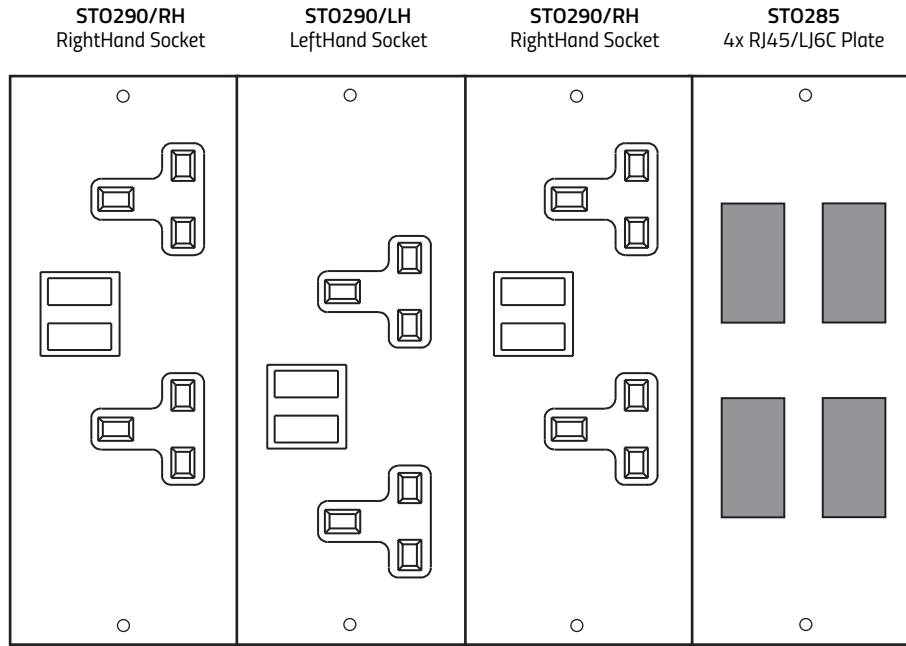


3 x Twin Switched Sockets & 1 Data Plate fitted

## TFB4 / TSB4 Triple Socket Configuration Diagrams

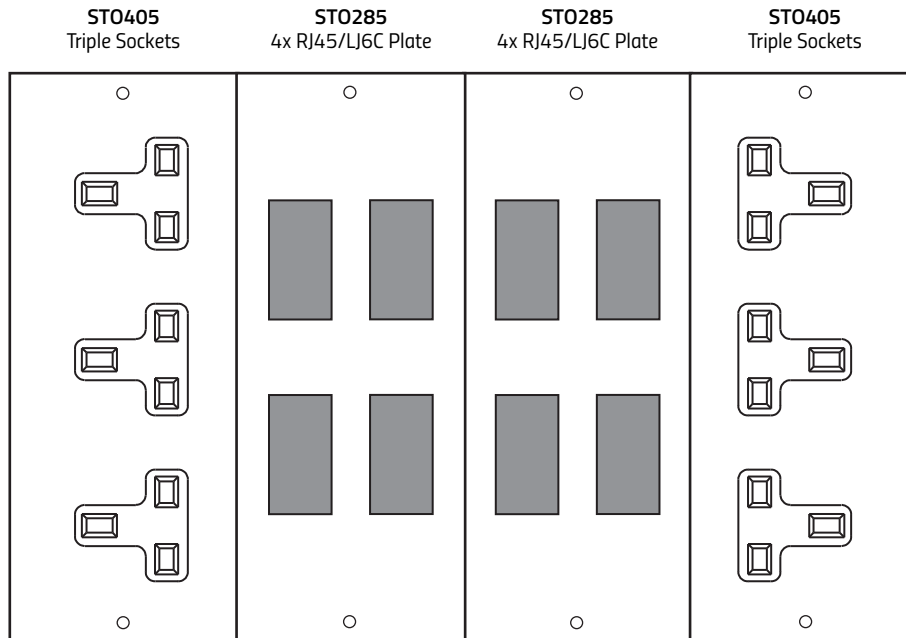

2 x Triple Sockets & 2 x Data Plates fitted

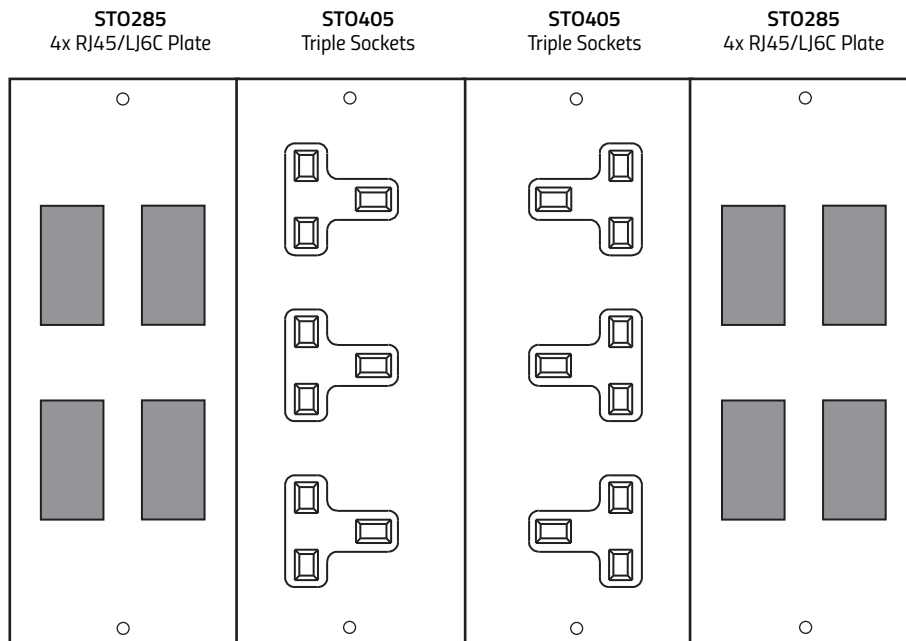

2 x Triple Sockets & 2 x Data Plates fitted (alternative option)