





PP2



PP2/2

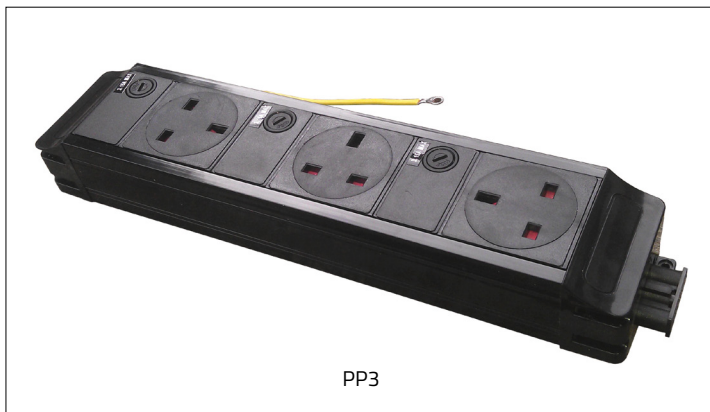

PP3

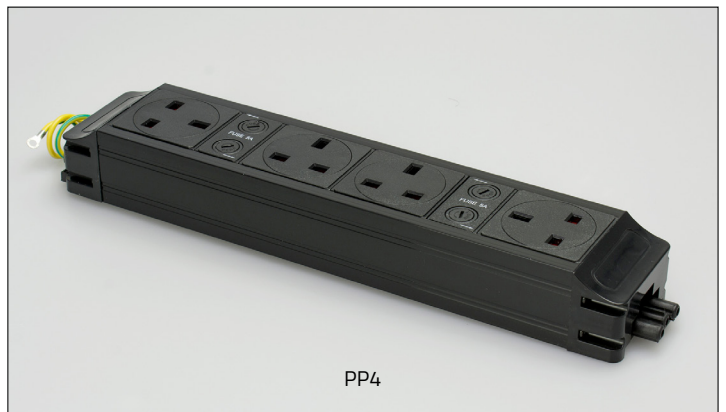

PP4



PP4/USB





PP4/4D



PP4/1



PP4/4

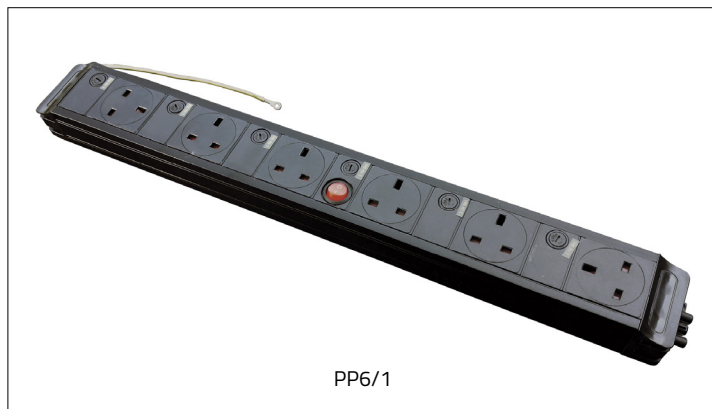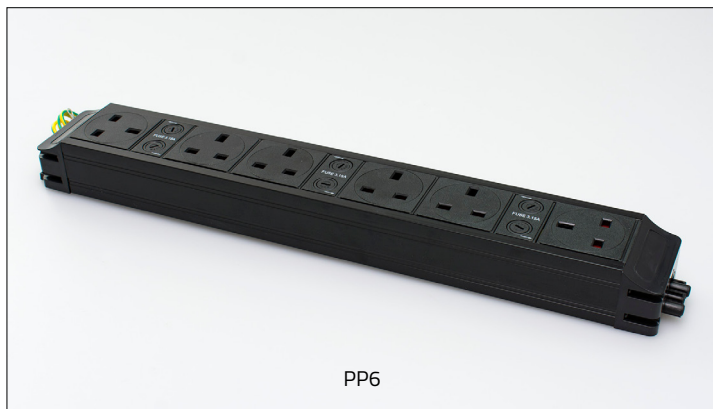

Model	Description	Power	USB /Data	Dimensions
PP2	2 Way Underdesk Power Unit	2 x UK Sockets Fused at 5A	None	(L)235mm x (W)62mm x (H)42mm
PP2/2	Individually switched 2 Way Underdesk Power Unit	2 x UK Sockets Fused at 5A	None	(L)235mm x (W)62mm x (H)42mm
PP3	3 Way Underdesk Power Unit	3 x UK Sockets Fused at 5A	None	(L)273mm x (W)62mm x (H)42mm
PP4	4 Way Underdesk Power Unit	4 x UK Sockets Fused at 5A	None	(L)342mm x (W)62mm x (H)42mm
PP4/1	4 Way Underdesk Power Unit with Master Switch	4 x UK Sockets Fused at 5A	None	(L)342mm x (W)62mm x (H)42mm
PP4/4	Individually switched 4 Way Underdesk Power Unit	4 x UK Sockets Fused at 5A	None	(L)342mm x (W)62mm x (H)42mm
PP4/USB	4 Way Underdesk Power Unit with Dual USB Smart Charger	4 x UK Sockets Fused at 5A	A & C USB (18W Max)	(L)400mm x (W)62mm x (H)42mm
PP4/4D	4 Way Underdesk Power Unit with 4 x Data Spaces (LJ6C)	4 x UK Sockets Fused at 5A	4 x Data Spaces	(L)472mm x (W)62mm x (H)42mm
PP6	6 Way Underdesk Power Unit	6 x UK Sockets Fused at 3.15A	None	(L)560mm x (W)62mm x (H)42mm
PP6/1	6 Way Underdesk Power Unit with Master Switch	6 x UK Sockets Fused at 3.15A	None	(L)560mm x (W)62mm x (H)42mm
PP6/USB	6 Way Underdesk Power Unit with Dual USB Charger	6 x UK Sockets Fused at 3.15A	Dual USB (3.4A)	(L)525mm x (W)62mm x (H)42mm
PP6s	6 Way Underdesk Power Unit with Schuko Sockets	6 x Euro Sockets	None	(L)370mm x (W)62mm x (H)42mm

### Product Description

- Made from high grade engineering plastic materials
- Complies with BS6396: 2002 as standard
- UK sockets individually fused at 5A (20mm 5A Glass Fuse)
- PP6 variant units fused at 3.15A
- Individually switched neon red (model dependent)
- Schuko unit also available with optional CEE7/4 SOCKETS
- PP4/4D with 4 x LJ6C Spaces, ideal for audio visual or data
- 3 Pin input & output connectors (excluding PP4/4D which has a 3 Pin connector and 20mm gland hole)
- Inter-connector sold separately, available in various lengths.
- **Power Cord Specifications:** 3 Core 1.5mm<sup>2</sup> 16amp rating

### USB information

- **PP4/USB**
  - The advanced A & C USB smartcharger has a total output of both A&C of 18W max.
  - USB-A QC 3.0, 2V/5A, 5V/3A & 9V/2A
  - USB-C PD, 2V/5A, 5V/3A & 9V/2A.
  - Combined at 5V gives a constant 3.4A each
- **PP6/USB**
  - Standard Dual USB fast Charger (5VDC 3.4A)

### Power & Inter-Connectors Leads



Model	Description	Length
PC1	Power cord fitted with 13A UK plug	1 metre
PC2	Power cord fitted with 13A UK plug	2 metre
PC3	Power cord fitted with 13A UK plug	3 metre
PC4	Power cord fitted with 13A UK plug	4 metre
PC5	Power cord fitted with 13A UK plug	5 metre

Longer lengths available upon enquiry



Model	Description	Length
ICL0.5	3 Pin Inter-connector Lead	0.5 metre
ICL1	3 Pin Inter-connector Lead	1 metre
ICL1.5	3 Pin Inter-connector Lead	1.5 metre
ICL2	3 Pin Inter-connector Lead	2 metre
ICL3	3 Pin Inter-connector Lead	3 metre