

A. REMOVE 4 SCREWS FIXED CONTROL PANEL



B. DISCONNECT REMOTE CONNECTOR



C. REMOVE THE OLD REMOTE




Drill 2 rivets off to
remove old remote


D.EXCHANGE REMOTE



E. INSTALL NEW REMOTE BY USING 2 SELF SCREWS

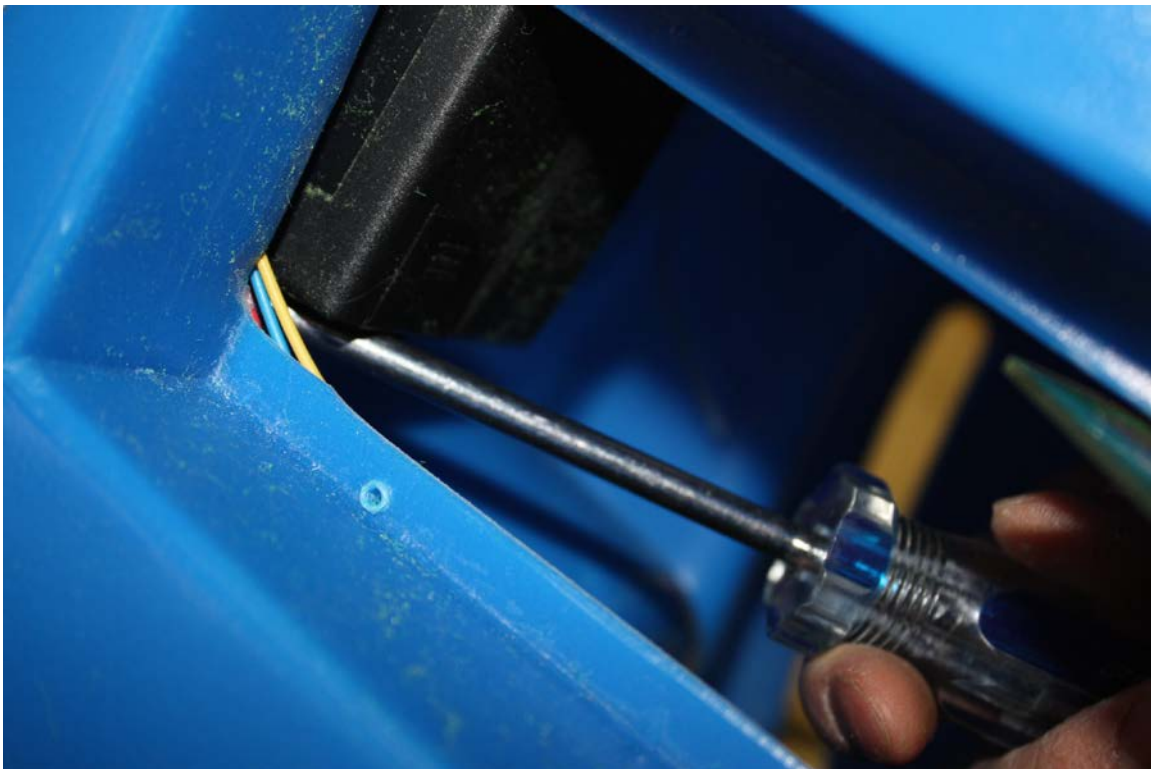

F. ANTENNA POSITION & INSIDE VIEW

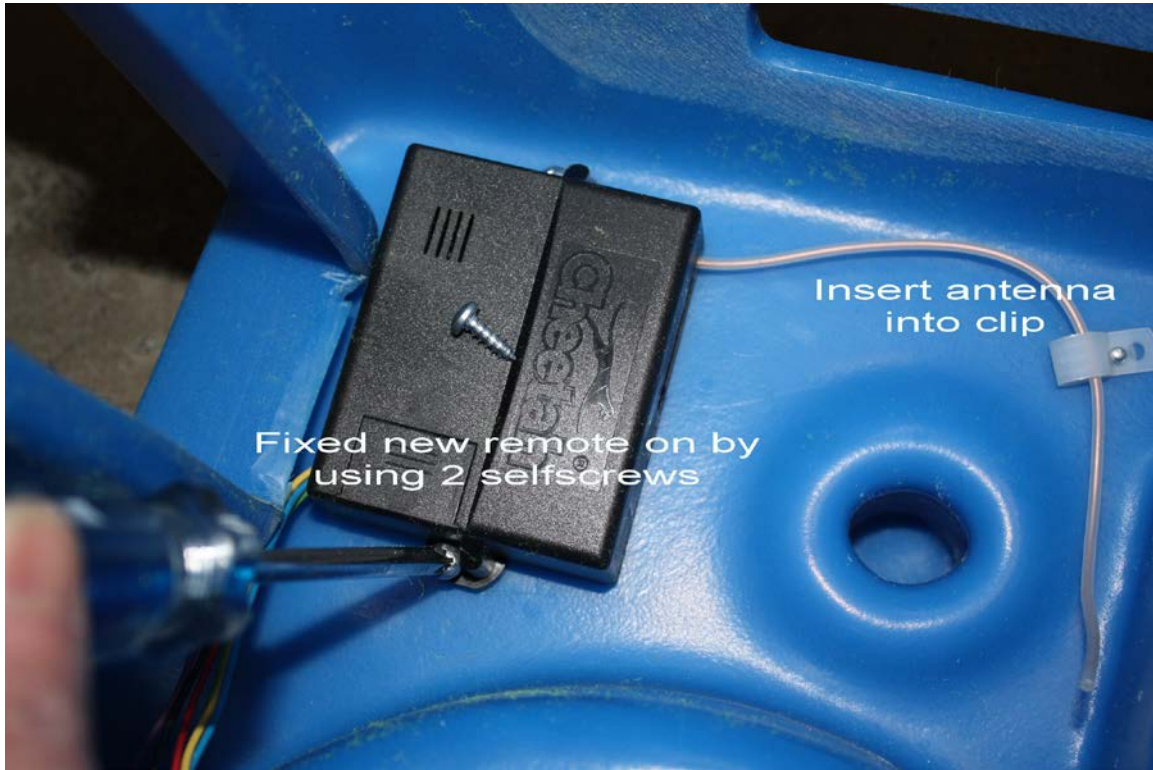

G. RETRACE THE PRECEDING STEPS A & B TO INSTALL