

## Polypropylene Non-Return Valve

### Features

- Spring loaded for fast reaction to back-flow.
- Multi-threaded for flexibility.
- Materials:  
 Body: Polypropylene  
 Spring: Stainless steel  
 Seal: Nitrile rubber with stainless steel backing disc and spring.

### Specifications

- Inlet/outlet: 25/32 mm MBSP.
- Pressure rating: 400 kPa.
- Length: 152 mm



### Ordering Information

Code	Description
1012872	Plastic 25/32 mm MBSP Combination Thread

## Air Vacuum Breaker – 15mm MBSP

### Application


Designed to allow air into the irrigation system, under vacuum conditions created during shutdown and drainage of drip lines. Aids in the prevention of dirt ingress into drippers under vacuum.

### Specifications

- 15mm (1/2") BSPM thread
- Maximum pressure: 1000 kPa
- Plastic construction with Buna-N o-ring seal

### Air Intake vs Vacuum Pressure

Vacuum Pressure (kPa)	-10	-20	-30	-40
Air Intake (m3/h)	34	51	65	80

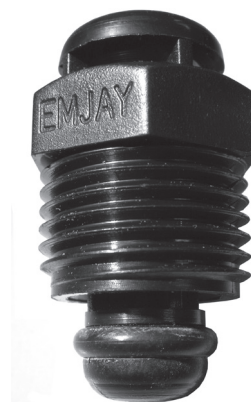

### Ordering Information

Code	Description
101VB15	Air vacuum Breaker, 15mm BSPM