



DO NOT SCALE

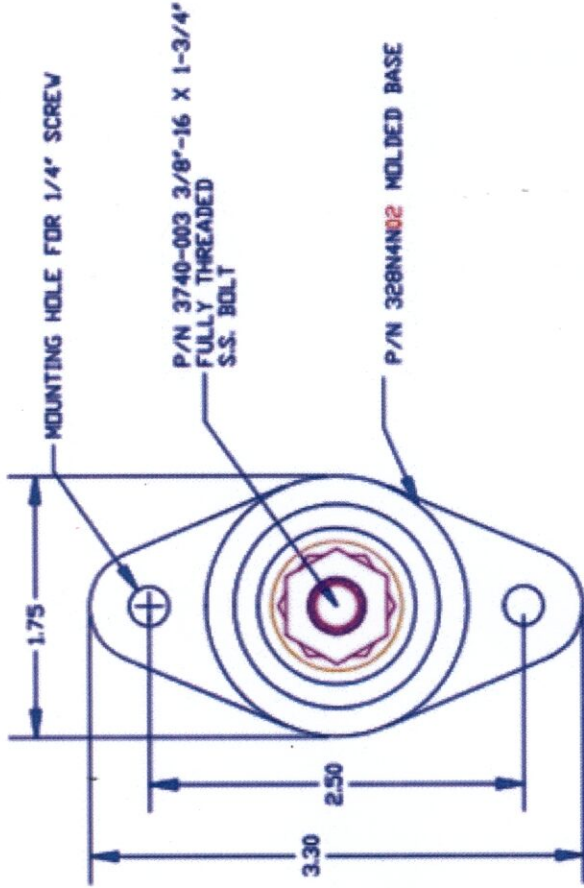

P/N 3844-003 3/8"-16 STAINLESS STEEL HEAVY HEX JAM NUT (2 PLCS) FACTORY ASSEMBLED TO 15 FT./LBS (180 IN./LBS)  
 OPTIONAL CONSTRUCTION: P/N 3844-000 3/8"-16 TIN PLATED BRASS HEAVY HEX JAM NUT (2 PLCS) FACTORY ASSEMBLED TO 15 FT./LBS (180 IN./LBS)

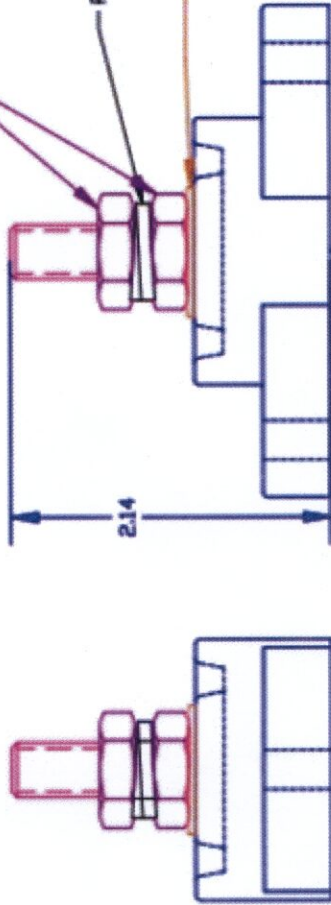

BASE MATERIAL: GLASS-REINFORCED NYLON  
 BASE MATERIAL UL RATING: 94 HB  
 DIELECTRIC STRENGTH: 630 VOLTS/MIL PER ASTM D149  
 CURRENT RATING: 160 AMPS CONTINUOUS, 12VDC  
 TEMP. RISE AT LOAD: 52 DEG. F.  
 BREAKOUT TORQUE: 22 FT./LBS. (264 IN./LBS.)  
 RECOMMENDED MAXIMUM TORQUE: 12 FT./LBS. (144 IN./LBS.)

TOLERANCE UNLESS OTHERWISE SPECIFIED: ±.030"/±0.8mm  
 RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,  
 RING GAGES OR PIN GAGES OF SUITABLE SIZE



Road Runner Connect, Inc.  
 405 Industrial Drive  
 Carmel, IN 46032  
 Telephone: (317) 574-1911 Fax: (317) 574-1915

REF: <b>XXXX</b>	DATE: .....	DRN BY:	WEIGHT: .21 Lb. / 95.2 G.
TITLE: 3/8" Red J-Block		CHK'D BY:	SCALE:
MATERIAL:		PART NO. RR77137N02	
COLOR: <b>XXXX</b>	DRG CLASS: <b>XXXX</b>		