



DO NOT SCALE

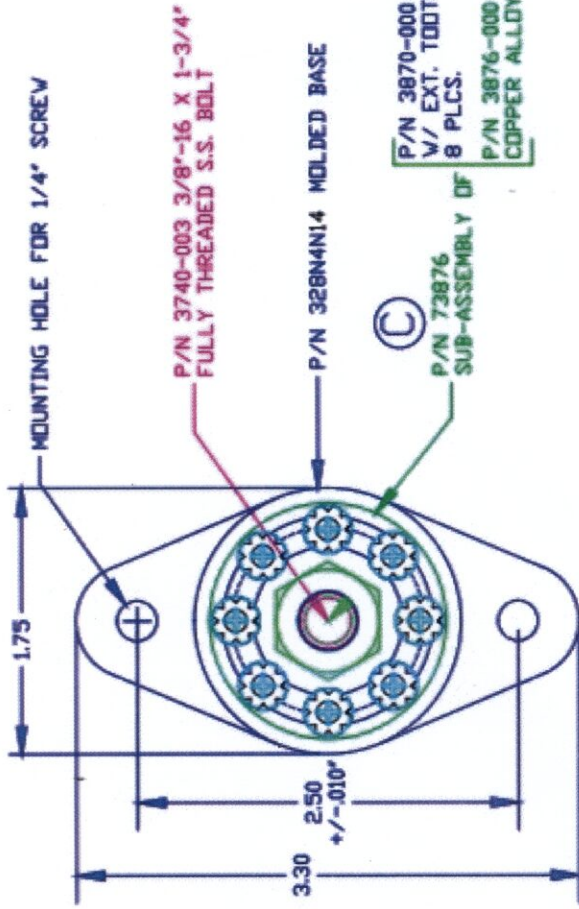

P/N 3870-000 #8-32 X 5/16" PAN PHILLIPS SEMS
W/ EXT. TOOTH WASHER STAINLESS
8 PLCS.
P/N 3876-000 3/8" NICKEL PLATED
COPPER ALLOY CONTACT DISK

P/N 3844-003 STAINLESS
STEEL HEAVY HEX JAM NUT (B D)
P/N 3844-000 TIN PLATED BRASS
HEAVY HEX JAM NUT
BOTTOM NUT FACTORY ASSEMBLED TO
15 FT./LBS (180 IN./LBS.)
P/N 3638-000 3/8" S.S. SPRING LOCK WASHER

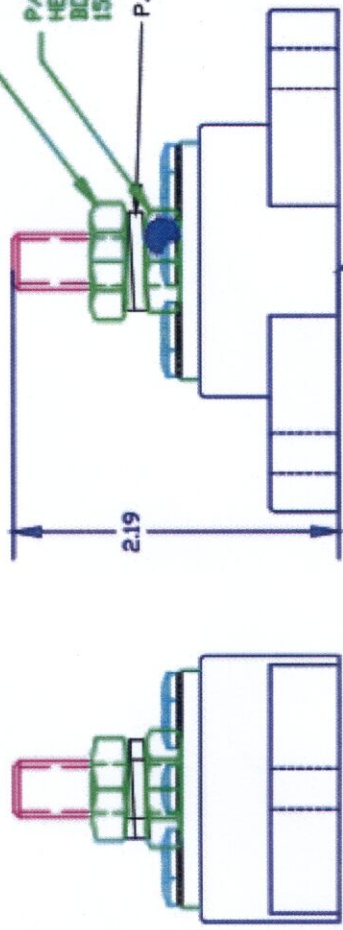

P/N 3290V14 CAVITY PLUG (NOT SHOWN)

INCLUDES P-16808110001 BLUE DOT MULTI LABEL, 1 PER CONTAINER
BASE MATERIAL: GLASS-REINFORCED NYLON
BUS MATERIAL: 94 HB
BUS MATERIAL: NICKEL PLATED COPPER ALLOY
VOLTAGE RATING: 48 VOLTS DC MAX.
BUS AMPERAGE RATING: 160 AMPS DC (8 X 20 AMP CIRCUITS)
TEMPERATURE RISE AT LOAD: 27.9 DEG. C. (52 DEG. F.)
RECOMMENDED MAXIMUM TORQUE: 12 FT./LBS. (144 IN./LBS.)

TOLERANCE UNLESS OTHERWISE SPECIFIED: ±.030"/±0.8mm
RADIAL DIAMETERS TO BE MEASURED OVER HANDELS,
RING GAGES OR PIN GAGES OF SUITABLE SIZE



Road Runner Connect, Inc.
405 Industrial Drive
Carmel, IN 46032

Telephone: (317) 571-1911 Fax: (317) 571-1915

REF:	DATE:	DRN BY:	VEIGHT:
****		CHK'D BY:	*****
TITLE: 3/8" Black J-Block-8		SCALE: NONE	
MATERIAL: NOTED		PART NO.	
COLOR: BLACK	DRG CLASS	RR77837N14	