


| SIZE | CF | L | A | B | F | P | T | D | R | G | K | REACH | STACK | WB |
|------|-------|-------|-------|-----|-------|-----|-----|----|----|-----|-----|-------|-------|------|
| 15.5 | 406.5 | 591.5 | 76.4° | 67° | 748 | 436 | 100 | 30 | 51 | 560 | 782 | 442 | 618 | 1128 |
| 17.5 | 445 | 612 | 76.4° | 67° | 768.2 | 436 | 105 | 30 | 51 | 560 | 785 | 460 | 623 | 1203 |
| 19 | 483 | 627.5 | 76.4° | 67° | 784.5 | 436 | 110 | 30 | 51 | 560 | 790 | 475.5 | 626 | 1219 |

注：
避震器長216MML
避震器行程63MML
後輪行程150MML
前叉行程160MML
Shimano
单盘/双盘，单盘最大34T，
双盘最大36T

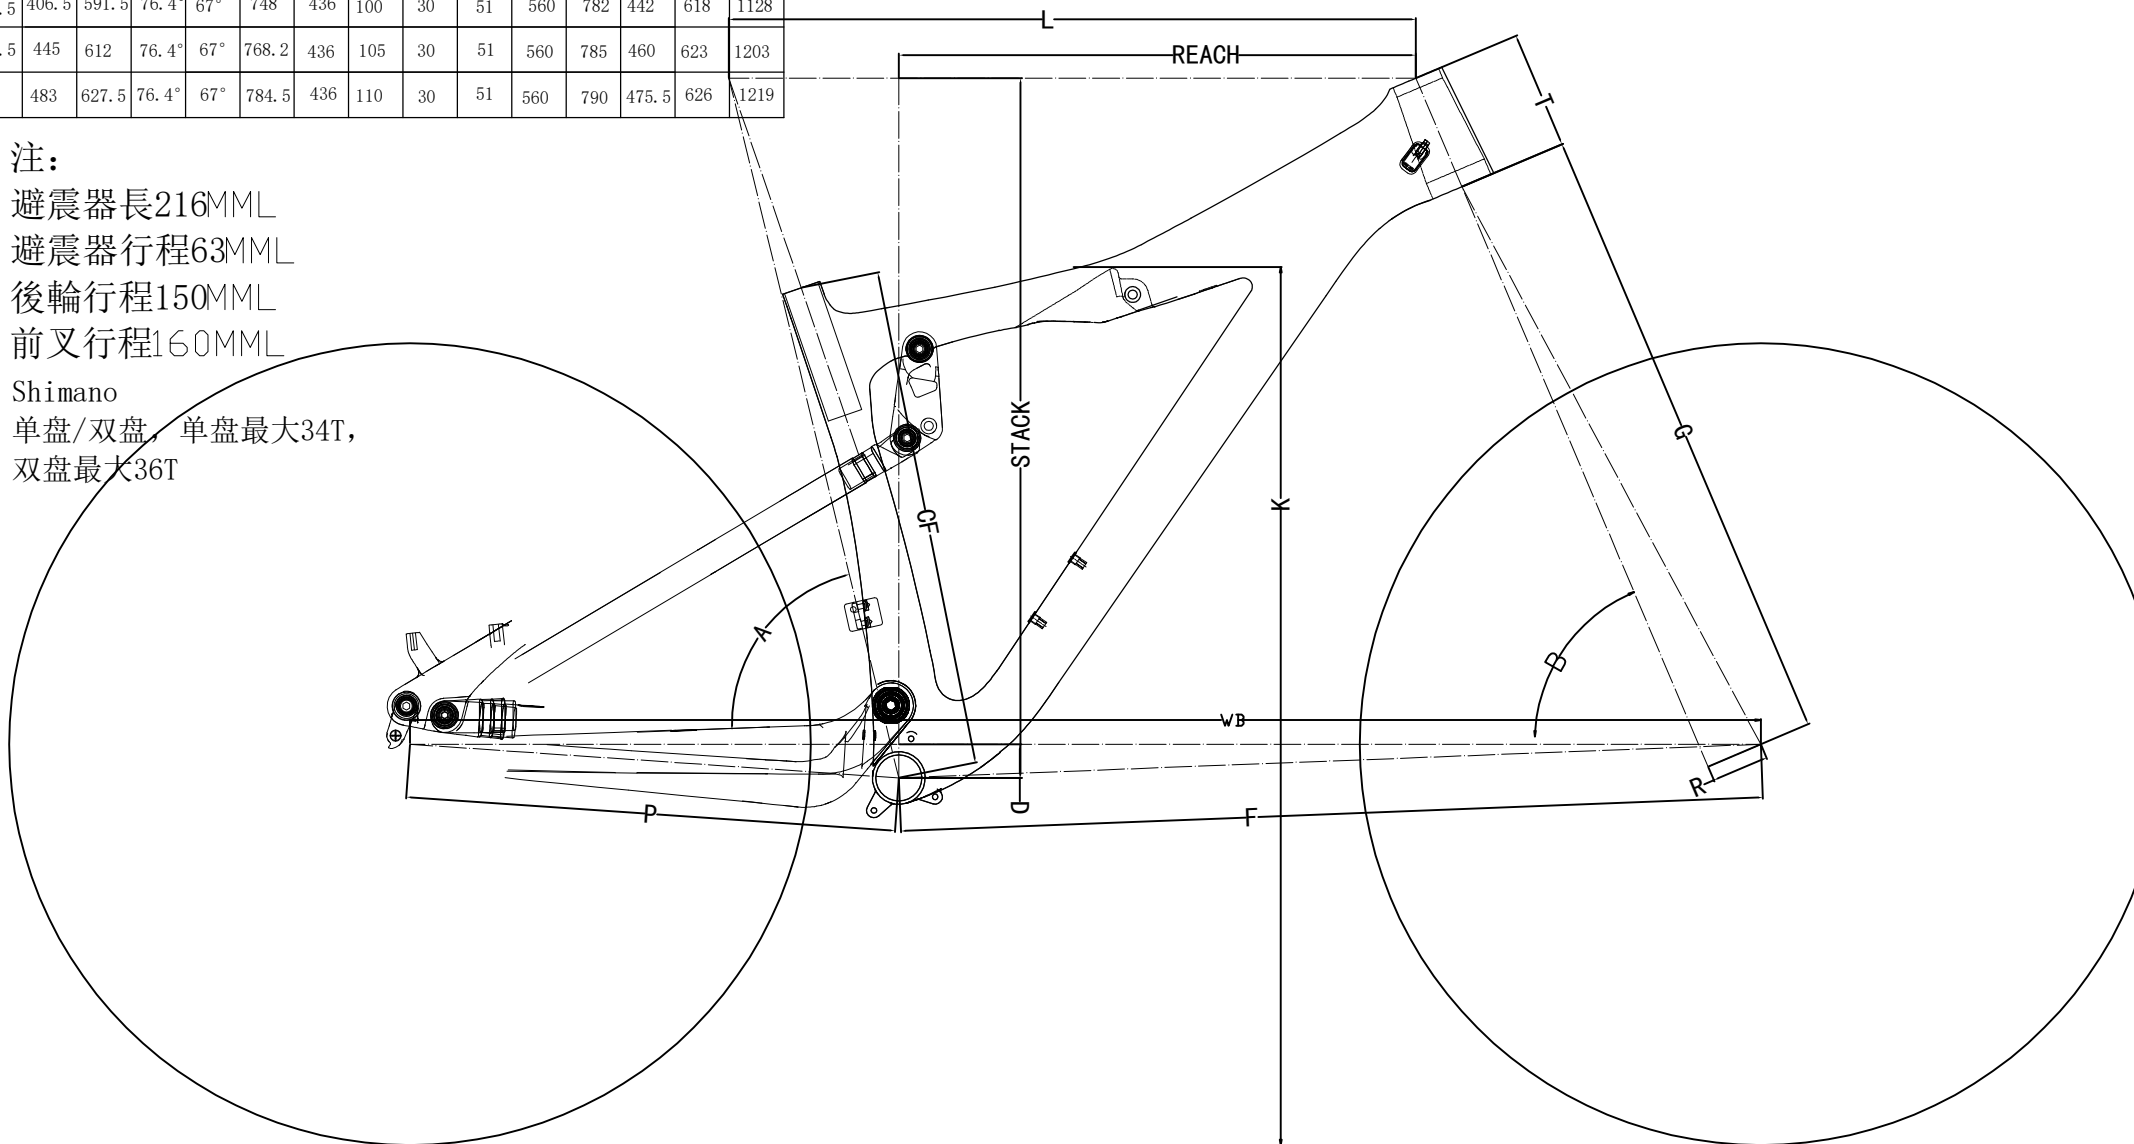

| Revised record | Responsibility | Date |
|----------------|----------------|------|
| | | |
| | | |
| | | |
| | | |

| | | | | |
|--|-------------|--------------|------------|------------------------|
| Un-marked tolerance X. ±1 .X ±0.5 .XX ±0.1 .XXX ±0.02 Angle ±0.5° | Approved By | Material | Carbon | Surface treatment |
| | Checked By | Horn cupping | | Model No. S01-29'-27.5 |
| | Designed By | Scale | 1:1 | Drawing Name GEOMETRY |
| | Drewed by | Unit | mm | Drawing No. |
| | | Date | 2020/04/09 | Version R0 |