


SIZE	CF	L	A	B	F	P	T	D	R	G	K	REACH	STACK	WB	recommended height
XS (440)	443.3	505	73.5°	71.2°	555.8	410	95	70	45	373	734	358.4	494.8	966.6	153CM-168CM
S (470)	471.5	520	73.5°	71.2°	570.3	410	97.5	70	45	373	753	370	505.5	969.9	165CM-175CM
M (510)	511.5	535	73.5°	71.4°	585.5	410	122.5	70	45	373	787	378	529	984.8	173CM-183CM
L (540)	541.5	550	73.5°	72.0°	594.5	410	144.5	70	45	373	807	387	549.5	994.3	180CM-190CM
XL (560)	562	559	73.5°	72.0°	604	410	164.5	70	45	373	826	390.3	568.5	1004	190CM以上

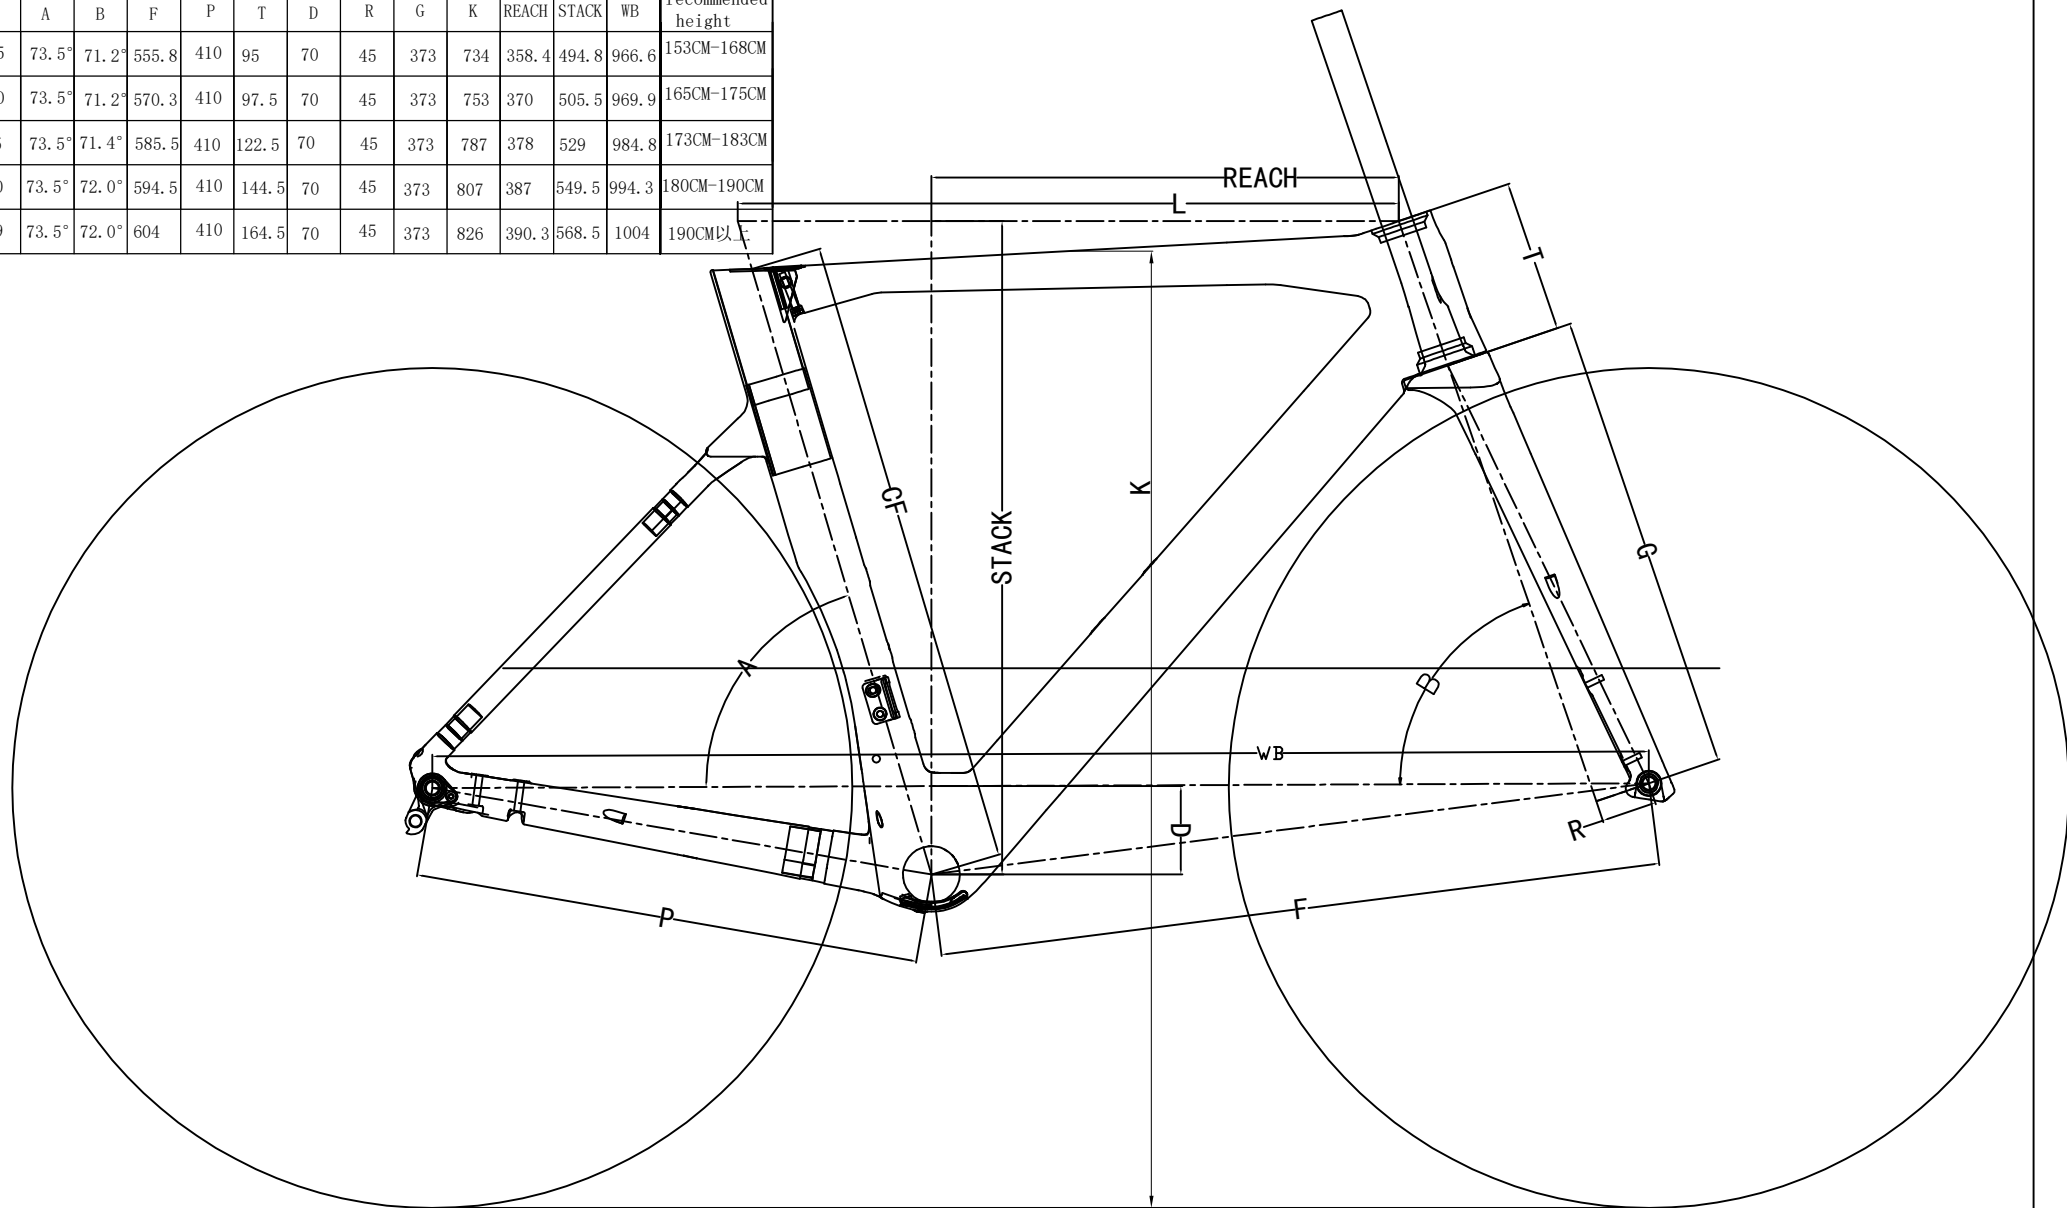

Revised record		Responsibility	Date

Un-marked tolerance X. ±1 .X ±0.5 .XX ±0.1 .XXX ±0.02 Angle ±0.5°	Approved By	Material	Carbon	Surface treatment
	Checked By	Horn cupping		Model No. R08
	Designed By	Scale	1:1	Drawing Name GEOMETRY
	Drewed by	Unit	mm	Drawing No.
		Date	2020/04/09	Version R0