

Flood Sensor

Overview

The Flood Sensor from Infortrolix is a reliable device that alerts users when water is detected. Due to its flexibility, the sensor can have additional accessories connected to such as the perimeter cable for tiny water leaks or the mini sensor for extended protection. Those accessories make it ideal for high risk areas and reducing the potential of environmental risks. Within two seconds of detecting water, the Flood Sensor transmits an alarm notifying the user of a water leak or possible flood.




Standard Features

- Field proven wireless technology
- Mounting bracket included
- Replaceable battery with up to 10 years of battery life (based on usage)
- Compatible with perimeter cable (NOWDC010) and Mini sensor (NOWDM020)
- Improved supervision range
- 2-year warranty

Specifications

Compatibility	Infortrolix Learn-Mode panels and receivers
Frequency	319MHz (Crystal based)
Battery	3V DL123A Lithium (Duracell)
Battery Life	10 years, typical
Contacts	Stainless Steel Screws
Operating Temperature	(0°C) to (49°C)
Operating Humidity	90% non condensing
Weight	4 oz.
Sensor Dimensions (WxLxH)	4.6 x 4.3 x 1.2 in. (11.85 x 10.93 x 3.1 cm)
Color	White
Approvals	FCC/IC

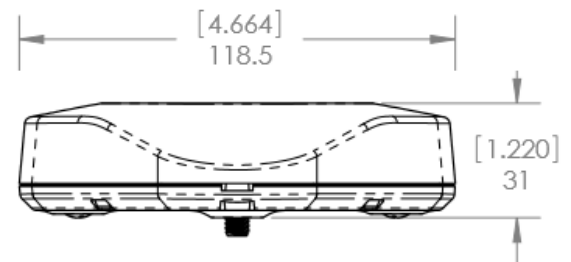

Ordering Information

NOWDSF300

Flood Sensor