





## CB BOOMS

### Curtain booms with solid internal float


#### Main features:

- Designed for use on calm or protected water
- Internal solid floats make the booms lightweight and strong. Always ready for deployment no extra time or accessories required
- Easy and convenient deployment and storage in a storage container.
- High float/weight ratio, provides good wave tracking.
- 25 meter standard section lengths which are joined with quick connectors

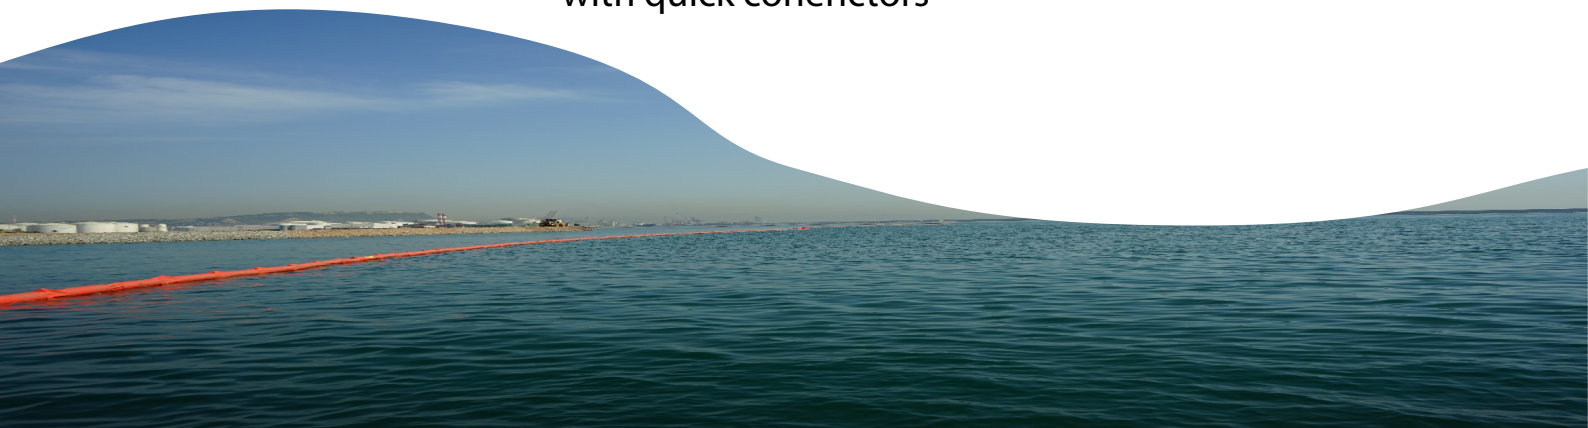

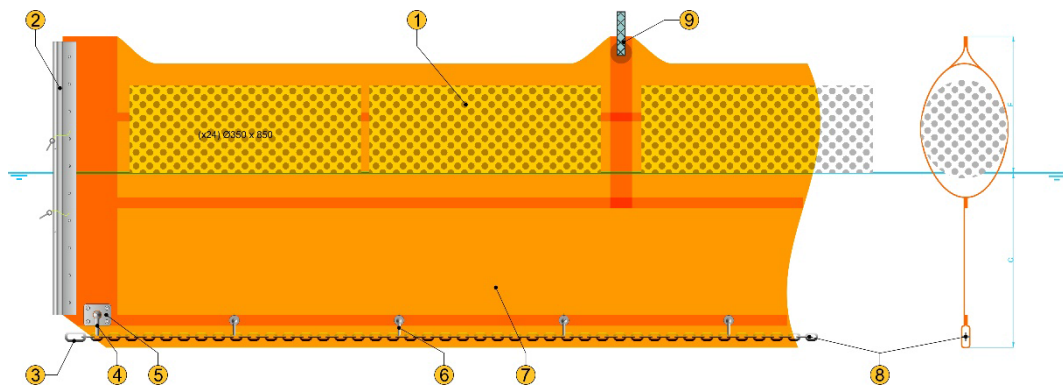

No.	Description	No.	Description
1	Internal float system	6	Ballast point shackle
2	ASTM Z conector	7	PVC coated polyester
3	Conection between booms	8	Ballast chain
4	Shackle plate	9	OPTIONAL: Handles (x6)
5	Stainless Steel base plate		
C	Draft	F	Freeboard

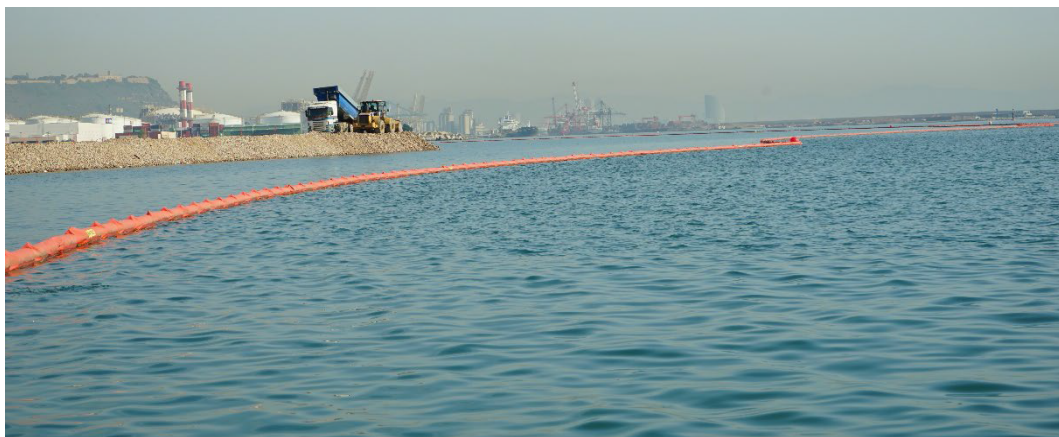

MODEL	CB650	CB850
Boom Type	Curtain boom with internal solid floats	
Applicacion		
Overall height (mm)	620	850
Freeboard (mm)	220	350
Draft (mm)	400	500
Section Length (mm)	25	25
Connection (1)	ASTM Z type	ASTM Z type
Deployment/storage option	Manually from a stillage or container	
Required staff	2	2

(1) OTHER CONNECTORS AVAILABLE

