

INDUSTRIAL CONFINED XPOWER SPACE VENTILATOR FANS

Introducing the X-8 and X-12 Confined Space Ventilator Fans! THE ONE and THE ONLY confined space fans that offers a complete control of both air velocity and air volume with a variable speed control switch. These fans can handle any narrow space with their 8" or 12" diameter flex hoses ducting air up to 125 ft. Just like all the XPOWER products, the X-8 and X-12 are super lightweight and compact. Their low amp and powerful, sealed motors can efficiently deliver dry air to ventilate, create negative air pressure or simply to help complete any drying process for a wide variety of construction applications. The X-8 and X-12 can be used without hoses to create high volume air circulation in gyms, hallways and other large areas. With its ducting hose, the X-8 and X-12 are the perfect fans to deliver a continuous flow of fresh air to subterranean manholes and sewers.



X-8 8" DIAMETER AIR OUTLET



X-12 12" DIAMETER AIR OUTLET





INDUSTRIES WE SERVE
















PRODUCT SPECIFICATIONS		
MODEL NO.	X-8	X-12
VOLTS / CYCLE	115V / 60Hz	115V / 60Hz
MOTOR	1/3 HP SEALED MOTOR	1/2 HP SEALED MOTOR
MAXIMUM RATED AIRFLOW	1,000 CFM	2,500 CFM
POWER	2.5A (HIGHEST SPEED)	4.5A (HIGHEST SPEED)
SPEED	VARIABLE SPEED CONTROL	VARIABLE SPEED CONTROL
RPM (LOW – HIGH)	1,100 / 3,200 RPM	1,200 / 3,200 RPM
UNIT / BOX WEIGHT	13.2 LBS. / 15.4 LBS.	23.1 LBS. / 26 LBS.
UNIT / BOX DIMENSIONS (L x W x H)	13.6"x11.1"x15.4" / 14.4"x11.7"x16.5"	15"x13.6"x18" / 15.7"x14.2"x19.1"
CORD LENGTH / GAUGE	20 FT. / 18AWG	20 FT. / 18AWG
AIR OUTLET DIAMETER	8 INCHES	12 INCHES
HOUSING MATERIAL	ABS PLASTIC HOUSING (INJECTION MOLD)	ABS PLASTIC HOUSING (INJECTION MOLD)
SAFETY CERTIFICATIONS	ETL/CETL CERTIFIED	ETL/CETL CERTIFIED

PRODUCT FEATURES & ACCESSORIES

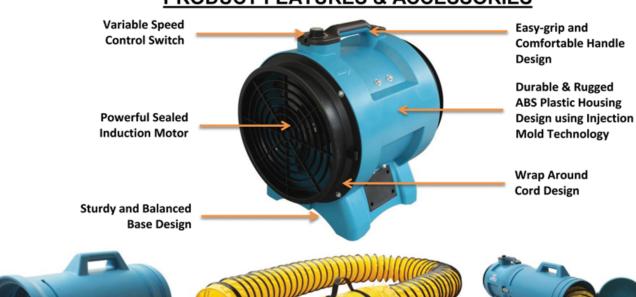



8DHC DUCTING HOSE CARRIER FOR 8DH25



8DH25 / 12DH25 8" Ø x 25 FT. LONG DUCT HOSE / 12" Ø x 25 FT. LONG DUCT HOSE



X-8 with 8DHC & 8DH25