

TELEPHONE INTERCOM & ACCESS CONTROL SYSTEM EL1SS

SECTION 28 13 00



KEY FEATURES

UNIT INTERFACE CAPABILITIES
STAND ALONE

PIN/voice
Yes

SPECIFICATIONS

DATA CONNECTIVITY

Keypad

VOICE COMMUNICATION

Intercom/POTS/ filtered DSL

CALLING CONNECTIVITY

POTS

POWER SUPPLY

120VAC to 16VDC transformer (included in carton)

PROGRAMMING (DATABASE MANAGEMENT)

Keypad

LOCAL USER CAPACITY

200

MAX NUMBER OF GATES/DOORS OF CONTROL (EACH)

2

RELAY OUTPUT

2 (1 primary, 1 auxilliary)

MOUNTING OPTIONS

Surface/gooseneck

OPERATING TEMPERATURE

-4°F to 149°F (-20°C to 65°C)

CAMERA READY

No

ANTI-TAMPER ALARM

Yes

WARRANTY

2 years

CONSTRUCTION

ENCLOSURE MATERIAL

Stainless steel


DATA SHEET
TELEPHONE INTERCOM & ACCESS
CONTROL SYSTEM

LiftMaster

TELEPHONE INTERCOM & ACCESS CONTROL SYSTEM EL1SS

SECTION 28 13 00

DIMENSIONS

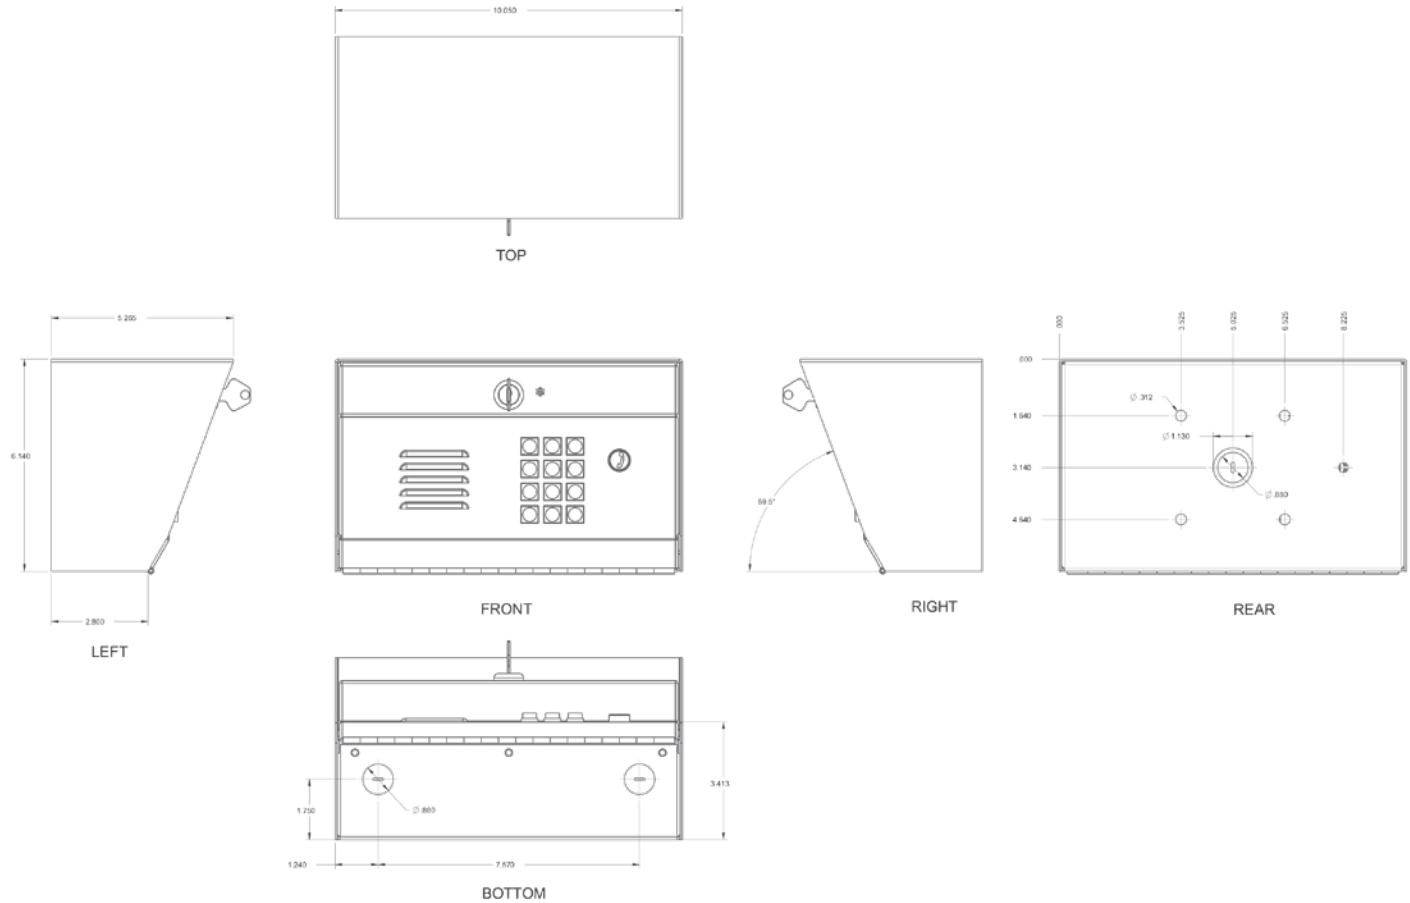

RANGE

EL1SS Feature	Wired	Wire type	Range
Power 120VAC to 16VDC transformer (from outlet to controller)	x	2 wire (18 AWG) 2 wire (16 AWG) 2 wire (12 AWG)	Up to 150 ft. 150 ft. to 250 ft. 250 ft. to 500 ft.
Relay output wiring	x	2 wire (18-24 AWG)	Up to 2500 ft.
AutoCall	x	2 wire (18-24 AWG)	Up to 500 ft.
Telco Phone Lines (TES unit to house)	x	2 wire (18-24 AWG)	Up to 500 ft.