KONTROL KUBE® COMPLETE

Mobile Containment. Simplified

Negative Air Scrubber Specifications:

Voltage: 115V

Dim: $24.6 \times 26.2 \times 18.2$ in.

Ductable Intake: 12 in.

Outlet: 8 in.

Use Weight: 44 lbs | 19.9 kg

Frequency: 60 Hz

Power: 3 amps

Air Movement (Min): 250 CFM

Air Movement (Max): 500 CFM

Filter System: 2-stage, plus optional DOP Stage 2 Filter

Primary Filters: HEPA

Daisy Chain: Plug three units together - provides up to 1500

CFM

GFCI Protected Outlet: Yes

Power Cord Length: 25 ft.

Speed Var: 250-500* CFM

Filter Indicator Light: Primary

(HEPA) Filter change

Housing: Rotomolded, with built-in antimicrobial product


protection

Safety Marks: UL/C-UL Listed

Complete HEPA Complete Negative Air Complete Solution

Features:

- Lightweight
- Durable
- Up to 500 CFM
- Variable Speed
- **Built-In Antimicrobial Protection**
- Designed for The Kontrol Kube Complete System
- 1 Year Limited Warranty

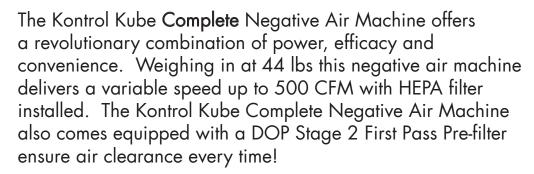

Also Included With Air Scrubber:

- DOP Stage 2 Filter
- **HEPA Filter**
- 5' Flex Duct

Unlike other air scrubbers, the Kontrol Kube Complete comes direct from the factory with all necessary componants. No need to search for compatible flex duct and filters.



For more information call 800-342-3755 or visit www.fiberlock.com

KONTROL KUBE® COMPIF

Mobile Containment. Simplified

Complete Mobility

Complete Durability Complete Simplicity



- Features:
- Easy Locking Attachment
- Complete Single User Mobility
- Accomodates Most Portable Negative Air Machines
- Can Also Be Used For Cable Spools, Equipment & Tools

The Kontrol Kube Negative Air Base attaches quickly and easily to the Kontrol Kube Locking Wheel Base to allow for Complete Mobility of ladders, tools, equipment and negative air machine. This innovative attachment makes moving Kontrol Kube Mobile Containment through a facility a quick and easy task that can be done by one person.





