

Art. Nr. 12395

Baby Mobile Hanger Seaside

Assembly instruction

Baby Mobile-Halterung Seaside

Aufbauanleitung

Support de mobile pour bébé Seaside


Notice de montage

Supporto per giostrina per bebè Seaside

Istruzioni di montaggio

Soporte para móviles infantiles Seaside

Instrucciones de montaje

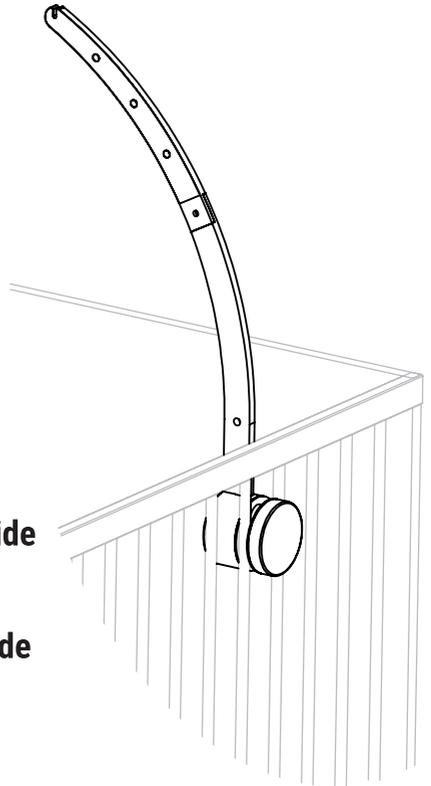

CAUTION:

The toy is to be assembled by an adult.



CAUTION:

Assemblage par un adulte requis.



WARNING:

Decoration item! Not a toy! Keep this information.





AVERTISSEMENT:

Article de décoration! Pas de jouets! Conserver ces indications.


Legler OHG small foot company
Achimner Straße 5
27755 Dalmehorst / Germany
www.small-foot.de



WARNING! Adult assembly required. | ACHTUNG! Aufbau nur durch einen Erwachsenen. | ATTENTION! Assemblage par un adulte requis. | AVVERTENZA! Richiesto assemblaggio da parte di un adulto. | ADVERTENCIA! Se requiere ensamblaje por un adulto.

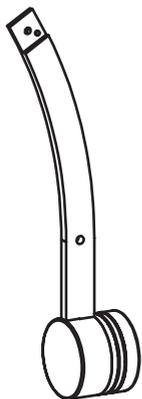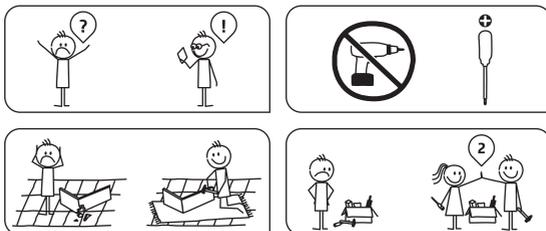

A x 1



B x 1



a x 1




b x 1



x 2




A

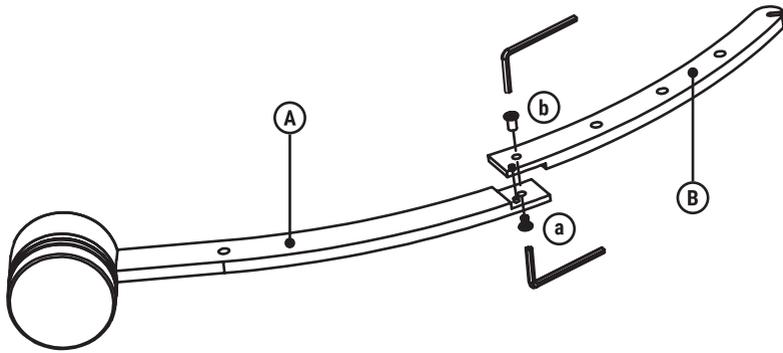


B

1

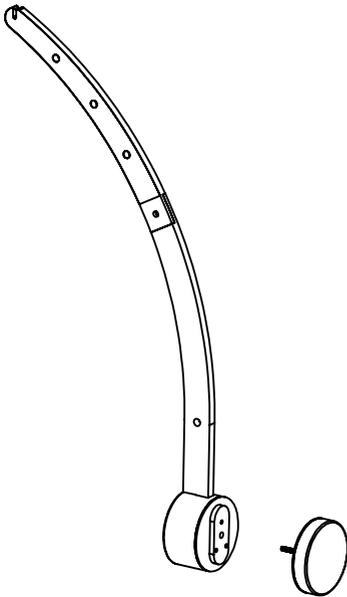

2

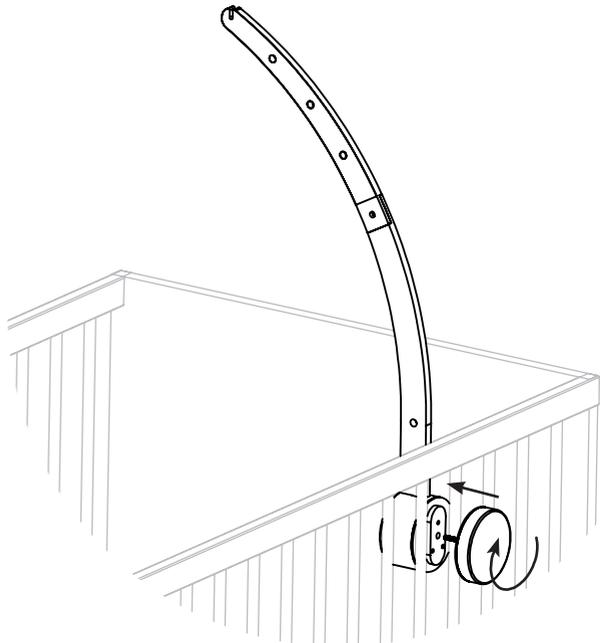

en A mounting tip:

only suitable for mounting between two stanchions/crib bars! The crib bars to be used for mounting must not be thicker than 30 mm and must be at least 8 mm thick. The required distance between the crib bars must be 37 mm or higher and cannot be greater than 65 mm.

fr Consigne de montage :

à fixer uniquement entre deux barreaux/lattes. Épaisseur des barreaux: min. 8 mm, max. 30 mm. Distance nécessaire entre les barreaux : min. 37 mm, max. 65 mm.

es Nota de montaje:

¡Sólo apto para la fijación entre dos barandillas o listones! Grosor de las barras: mín. 8 mm, máx. 30 mm. Distancia entre las barras: mín. 37 mm, máx. 65 mm.

de Montagehinweis:

Nur zur Befestigung zwischen zwei Gitterstäben/Leisten. Stärke Gitterstäbe: mind. 8 mm, max. 30 mm. Notwendiger Abstand zwischen den Gitterstäben mind. 37 mm, max. 65 mm.

it Istruzioni per il montaggio:

adatto solo per il montaggio tra due barre/listelli. Spessore delle barre: min. 8 mm, max. 30 mm. Distanza necessaria tra le barre min. 37 mm, max. 65 mm.

