



SHELLY BEACH



HD SURVEILLANCE



H.265 All In 1 Hybrid Stand Alone DVR-2MP Lite 4CH Video Inputs

Video Input	4CH AHD Standard BNC + 2CH IP (over Network)
Video Output	HDMI(1920x1080), VGA (1280x1024, 1024x768)
Recording IP	3MP and lower: 25/30FPS Per Channel
Recording AHD	AHD 2MP lite / 1MP: Up to 25/30FPS Per Channel
Recording TVI	2MP lite / 1MP: Up to 25/30FPS Per Channel
Recording CVI	2MP lite / 1MP: Up to 25/30FPS Per Channel
Recording CVBS	960H: Up to 25/30FPS Per Channel
Playback	Playback:
Playback Local	4 Channel Simultaneously (Local)
Playback Remote	4 Channel Simultaneously (Remote)
Audio	2-Way audio
Audio Input	1 Channel (RCA) + IP Cameras inputs
Audio Output	1 Channel (RCA) + IP Cameras outputs
Storage	1 x SATA (Up to 6TB)
USB Port	2 x USB2.0
Network	RJ-45: 100Mbps
PTZ / Keyboard	Protocols: Pelco D, Pelco P, Samsung, Visca, ONVIF, CoC



SH-4100A5N-2L(MM)

SURDHD-PRO4001



H.265 All In 1 Hybrid Stand Alone DVR-8MP Lite 4CH Video Inputs

Video Input	4CH Standard BNC + 2CH IP (over Network)
Video Output	HDMI(4K, 1920x1080), VGA (1280x1024), CVBS(Spot)
Recording IP	8MP: 20FPS Per Channel, 5MP and lower: 25/30FPS Per Channel
Recording AHD	8MP lite / 5MP / 4MP: Up to 12/15FPS Per Channel, 5MP Lite: Up to 20FPS Per Channel, 4MP lite / 2MP / 1MP: Up to 25/30FPS Per Channel
Recording TVI	8MP lite / 5MP / 4MP: Up to 12/15FPS Per Channel, 5MP Lite: Up to 20FPS Per Channel, 4MP lite / 2MP / 1MP: Up to 25/30FPS Per Channel
Recording CVI	4MP: Up to 12/15FPS Per Channel, 2MP / 1MP: Up to 25/30FPS Per Channel
Recording CVBS	960H: Up to 25/30FPS Per Channel
Bandwidth Incoming	16Mbps
Bandwidth Outgoing	40Mbps
Playback Local	4 Channel Simultaneously (Local)
Playback Remote	6 Channel Simultaneously (Remote)
Audio Input	1 Channel (RCA) + IP Cameras inputs
Audio Output	1 Channel (RCA) + IP Cameras outputs
Analytics AHD Cameras	Line Crossing (No Direction Choice), Sterile Area, Smart Search
Analytics IP Cameras	Line Crossing (With Direction Choice), Sterile Area, Item Monitoring, Camera Tampering, Smart Search
Storage	1 x SATA (Up to 6TB)
USB Port	2 x USB2.0
Network	RJ-45: 100Mbps
Alarm Input	IP Cameras inputs only
Alarm Output	IP Cameras outputs only
PTZ / Keyboard	1 x RS-485 / CoC / IP over Network (Protocol: Pelco D, Pelco P, Samsung, Visca, ONVIF, CoC)



SH-4050A5N-8L(MM)

SURDHD-PRO4005



Security Superstore Shelly Beach

saleshc@securitysuperstore.co.za 072 250 7822



H.265 All In 1 Hybrid Stand Alone DVR-2MP Lite 8CH Video Inputs

Video Input	8CH Standard BNC + 2CH IP (over Network)
Video Output	HDMI(1920x1080), VGA (1280x1024, 1024x768)
Recording IP	5MP and lower: 25/30FPS Per Channel
Recording AHD	2MP lite / 1MP: Up to 12/15FPS Per Channel
Recording TVI	2MP lite / 1MP: Up to 12/15FPS Per Channel
Recording CVI	2MP lite / 1MP: Up to 12/15FPS Per Channel
Recording CVBS	960H: Up to 25/30FPS Per Channel
Bandwidth Incoming	16Mbps
Bandwidth Outgoing	60Mbps
Playback Local	8 Channel Simultaneously (Local)
Playback Remote	4 Channel Simultaneously (Remote)
Audio Input	1 Channel (RCA) + IP Camera inputs
Audio Output	1 Channel (RCA) + IP Camera outputs
Analytics AHD Cameras	Line Crossing (No Direction Choice), Sterile Area, Smart Search
Analytics IP Cameras	Line Crossing (With Direction Choice), Sterile Area, Item Monitoring, Camera Tampering, Smart Search
Storage	1 x SATA (Up to 6TB)
USB Port	2 x USB2.0
Network	RJ-45: 100Mbps
Alarm Input	IP Cameras inputs only
Alarm Output	IP Cameras outputs only
PTZ / Keyboard	Protocols: Pelco D, Pelco P, Samsung, Visca, ONVIF, CoC



SH-8100A5N-2L(MM)

SURDHD-PRO8001



H.265 All In 1 Hybrid Stand Alone DVR-8MP Lite 8CH Video Inputs

Video Input	8CH Standard BNC + 8CH IP (over Network)
Video Output	HDMI(4K, 1920x1080), VGA (1280x1024), CVBS(Spot)
Recording IP	8MP: 20FPS Per Channel, 5MP and lower: 25/30FPS Per Channel
Recording AHD	8MP lite / 5MP / 4MP: Up to 12/15FPS Per Channel, 5MP Lite: Up to 20FPS Per Channel, 4MP lite / 2MP / 1MP: Up to 25/30FPS Per Channel
Recording TVI	8MP lite / 5MP / 4MP: Up to 12/15FPS Per Channel, 5MP Lite: Up to 20FPS Per Channel, 4MP lite / 2MP / 1MP: Up to 25/30FPS Per Channel
Recording CVI	4MP: Up to 12/15FPS Per Channel, 2MP / 1MP: Up to 25/30FPS Per Channel
Recording CVBS	960H: Up to 25/30FPS Per Channel
Bandwidth Incoming	32Mbps
Bandwidth Outgoing	80Mbps
Playback Local	8 Channel Simultaneously (Local)
Playback Remote	8 Channel Simultaneously (Remote)
Audio Input	1 Channel (RCA) + IP Cameras inputs
Audio Output	1 Channel (RCA) + IP Cameras outputs
Analytics AHD Cameras	Line Crossing (No Direction Choice), Sterile Area, Smart Search
Analytics IP Cameras	Line Crossing (With Direction Choice), Sterile Area, Item Monitoring, Camera Tampering, Smart Search
Storage	1 x SATA (Up to 6TB)
USB Port	2 x USB2.0
Network	RJ-45: 100Mbps
Alarm Input	IP Cameras inputs only
Alarm Output	IP Cameras outputs only
PTZ / Keyboard	1 x RS-485 / CoC / IP over Network (Protocol: Pelco D, Pelco P, Samsung, Visca, ONVIF, CoC)



SH-8100A5N-8L(MM)

SURDHD-PRO8006



Security Superstore Shelly Beach

saleshc@securitysuperstore.co.za 072 250 7822



H.265 All In 1 Hybrid Stand Alone DVR-8MP Lite 8CH Video Inputs

Video Input	8CH Standard BNC + 8CH IP (Over Network)
Video Output	HDMI(4K, 1920x1080), VGA (1280x1024, 1024x768), CVBS(Spot)
Recording	8CH AHD/TVI/CVI/Analogue + 8CH IP
Recording IP	8MP / 5MP / 4MP / 3MP / 2MP / 1MP: Up to 25/30FPS Per Channel
Recording AHD	8MP Lite / 5MP / 4MP: Up to 15/12FPS Per Channel, 5MP Lite: Up to 20FPS Per Channel, 4MP Lite / 2MP / 1MP: Up to 25/30FPS Per Channel
Recording TVI	8MP Lite / 5MP / 4MP: Up to 15/12FPS Per Channel, 5MP Lite: Up to 20FPS Per Channel, 4MP Lite / 2MP / 1MP: Up to 25/30FPS Per Channel
Recording CVI	4MP: Up to 15/12FPS Per Channel, 2MP / 1MP: Up to 25/30FPS Per Channel
Recording CVBS	960H: Up to 30/25FPS Per Channel
Playback	8 Channel Simultaneously
Audio	2 Way audio
Audio Input	8CH RCA (2.0 Vp-p, 1 kΩ) (+IP Cameras)
Audio Output	1CH RCA (2.0 Vp-p, 1 kΩ)
Storage	2 x SATA (Up to 8TB) + E-Sata (Up to 8TB)
USB Port	1 USB 2.0 Port
Network	RJ-45: 1000Mbps
Alarm Input	8CH (+IP Cameras)
Alarm Output	2CH (+IP Cameras)
PTZ / Keyboard	1 x RS485 (Protocol: Pelco D, Pelco P, Samsung, Visca, ONVIF, CoC)



SH-8100A5-8L(1U)

SURDHD-PRO8007



Ossia



H.265 All In 1 Hybrid Stand Alone DVR-2MP Lite 16CH Video Inputs

Video Input	16CH Standard BNC + 2CH IP (over Network)
Video Output	HDMI(1920x1080), VGA (1280x1024, 1024x768), CVBS(Spot)
Recording IP	5MP: 25FPS Per Channel, 4MP and lower: 25/30FPS Per Channel
Recording AHD	2MP lite / 1MP: Up to 12/15FPS Per Channel
Recording TVI	2MP lite / 1MP: Up to 12/15FPS Per Channel
Recording CVI	2MP lite / 1MP: Up to 12/15FPS Per Channel
Recording CVBS	960H: Up to 25/30FPS Per Channel
Bandwidth Incoming	16Mbps
Bandwidth Outgoing	80Mbps
Playback Local	16 Channel Simultaneously (Local)
Playback Remote	8 Channel Simultaneously (Remote)
Audio Input	1 Channel (RCA) + IP Camera inputs
Audio Output	1 Channel (RCA) + IP Camera outputs
Analytics AHD Channels	Line Crossing (No Direction Choice), Sterile Area, Smart Search
Analytics IP Channels	(No DDA): Line Crossing (With Direction Choice), Sterile Area, Item Monitoring, Camera Tampering, Smart Search
Storage	1 x SATA (Up to 6TB)
USB Port	2 x USB2.0
Network	RJ-45: 100Mbps
Alarm Input	IP Cameras inputs only
Alarm Output	IP Cameras outputs only
PTZ / Keyboard	Protocols: Pelco D, Pelco P, Samsung, Visca, ONVIF, CoC, CoC



SH-16200A5N-2L(MM)

SURDHD-PRO16008



Security Superstore Shelly Beach

saleshc@securitysuperstore.co.za 072 250 7822



H.265 All In 1 Hybrid Stand Alone DVR-5MP Lite 16CH Video Inputs

Video Input	16CH Standard BNC + 8CH IP (over Network)
Video Output	HDMI(1920x1080), VGA (1280x1024, 1024x768), CVBS(Spot)
Recording IP	5MP and lower: 25/30FPS Per Channel
Recording AHD	5MP Lite: Up to 10FPS Per Channel, 4MP Lite / 2MP: Up to 12/15FPS Per Channel, 2MP Lite: Up to 25/30FPS Per Channel
Recording TVI	5MP Lite: Up to 10FPS Per Channel, 4MP Lite / 2MP: Up to 12/15FPS Per Channel, 2MP Lite: Up to 25/30FPS Per Channel
Recording CVI	4MP Lite / 2MP: Up to 12/15FPS Per Channel, 2MP Lite: Up to 25/30FPS Per Channel
Recording CVBS	Not supported
Bandwidth Incoming	32Mbps
Bandwidth Outgoing	80Mbps
Playback Local	16 Channel Simultaneously (Local)
Playback Remote	16 Channel Simultaneously (Remote)
Audio Input	1 Channel (RCA) + IP Cameras inputs
Audio Output	1 Channel (RCA) + IP Cameras inputs
Analytics AHD Channels	Line Crossing (No Direction Choice), Sterile Area, Smart Search
Analytics IP Channels	Line Crossing (With Direction Choice), Sterile Area, Item Monitoring, Camera Tampering, Smart Search
Storage	1 x SATA (Up to 6TB)
USB Port	2 x USB2.0
Network	RJ-45: 100Mbps
Alarm Input	IP Cameras inputs
Alarm Output	IP Cameras outputs
PTZ / Keyboard	1 x RS485 (Protocol: Pelco D, Pelco P, Samsung, Visca, ONVIF, CoC)



SH-16200A5N-5L(MM)

SURDHD-PRO16009



Ossia



H.265 All In 1 Hybrid Stand Alone DVR- 8MP Lite 16CH Video Inputs

Video Input	16CH Standard BNC + 8CH IP (Over Network)
Video Output	HDMI(4K, 1920x1080), VGA (1280x1024, 1024x768), CVBS(Spot)
Recording	16CH AHD/TVI/CVI/Analogue + 8CH IP
Recording IP	8MP / 5MP / 4MP / 3MP / 2MP / 1MP: Up to 25/30FPS Per Channel
Recording AHD	8MP Lite / 5MP / 4MP: Up to 15/12FPS Per Channel, 5MP Lite: Up to 20FPS Per Channel, 4MP Lite / 2MP / 1MP: Up to 25/30FPS Per Channel
Recording TVI	8MP Lite / 5MP / 4MP: Up to 15/12FPS Per Channel, 5MP Lite: Up to 20FPS Per Channel, 4MP Lite / 2MP / 1MP: Up to 25/30FPS Per Channel
Recording CVI	4MP: Up to 15/12FPS Per Channel, 2MP / 1MP: Up to 25/30FPS Per Channel
Recording CVBS	960H: Up to 30/25FPS Per Channel
Playback	16 Channel Simultaneously
Audio	2 Way audio
Audio Input	8CH RCA (2.0 Vp-p, 1 kΩ) (+IP Cameras)
Audio Output	1CH RCA (2.0 Vp-p, 1 kΩ)
Storage	2 x SATA (Up to 8TB) + E-SATA (up to 8TB)
USB Port	2 USB 2.0 Port
Network	RJ-45: 1000Mbps
Alarm Input	16CH (+IP Cameras)
Alarm Output	4CH (+IP Cameras)
FPS	100 (PAL) / 120 (NTSC))
PTZ / Keyboard	1 x RS485 (Protocol: Pelco D, Pelco P, Samsung, Visca, ONVIF, CoC)



SH-16200A5-8L(1U)

SURDHD-PRO16010



Ossia



Security Superstore Shelly Beach

saleshc@securitysuperstore.co.za 072 250 7822



H.265 All In 1 Hybrid Stand Alone DVR-5MP Lite 32CH Video Inputs

Video Input	Input: Dynamic Hybrid, DVR Oriented: 32 Channel 4in1 HD Analog (BNC) + 8 Channel IP (Over Network), NVR Oriented: 24 Channel 4in1 HD Analog (BNC) + 16 Channel IP (Over Network), Including all the HD Analog/IP variations available within the specified ranges.
Video Output	Output: VGA: 1024x768/1280x1024/1920x1080, HDMI: 1024x768/1280x1024/1920x1080, CVBS (Can be used a spot)
Recording	HD Analog – 24-32 Channels
Recording IP	5MP and lower, Max 25/30FPS Per Channel, Resolution: 2560x1920 (PAL/NTSC)
Recording CVBS	960H, Max 25/30FPS Per Channel, Resolution: 960x575 (PAL) / 960x480 (NTSC), IP – 8-24 Channels
Recording AHD/TVI 5MP	5MP Lite, Max 10FPS Per Channel, Resolution: 1280x1936 (PAL/NTSC)
Recording AHD/TVI 4MP	4MP Lite, Max 12/15FPS Per Channel, Resolution: 1280x1936 (PAL/NTSC)
Recording AHD/TVI/CVI	1080P, Max 12/15FPS Per Channel, Resolution: 1920x1080 (PAL/NTSC), (Supported Resolutions: 1080P Lite, 720P)
Bandwidth Incoming	40-88Mbps
Bandwidth Outgoing	160Mbps
Playback Local	16 Channel Simultaneously (Local)
Playback Remote	8 Channel Simultaneously (Remote)
Audio Input	16 Channel (RCA)
Audio Output	1 Channel (RCA)
Storage	4 x SATA (Up to 8TB Each), 1 x eSATA (Up to 8TB)
USB Port	2 x USB2.0
Network	RJ-45: 1000Mbps
Alarm Input	16 (Dry-Contact)
Alarm Output	4 (Dry-Contact)
PTZ / Keyboard	1 x RS485 (Protocol: CoC/Pelco D\P/Samsung/Visca (IP Over ONVIF))



SH-32400A5-5L(1.5U)

SURDHD-PRO32001



Ossia



Security Superstore Shelly Beach

saleshc@securitysuperstore.co.za 072 250 7822



Camera HD- 2MP Pro series Dome/Turret IR 20M (1 LED Array) 2.8mm Lens

Sensor	1/2.9", 2 Mega-Pixel
Selectable output	1080P/720P 4in1 (AHD / CVI / TVI / CVBS + PAL/NTSC)
Lens	2.8mm Mega-Pixel Fixed (88° Field of View)
IR Range	20M (1 Array LED)
True Day & Night	ICR
Image Enhancement	3D-DNR
IP Rate	IP67
Power	DC 12V, ~270mA
Weight	485g



DI-320A-28

SURCHD-PROD003




Camera HD- 2MP Pro series Dome/Turret IR 40M (3LED Array) 2.8-12mm Lens

Sensor	1/2.9", 2 Mega-Pixel
Selectable output	1080P/720P 4in1 (AHD / CVI / TVI / CVBS + PAL/NTSC)
Lens	2.8-12mm Vari-Focal Lens (88°-33° Field of View)
IR Range	40M (3 Array LED)
True Day & Night	ICR
Image Enhancement	3D-DNR
IP Rate	IP67
Power	DC 12V, ~600mA
Weight	695g



DI-320A-VF

SURCHV-PROT001

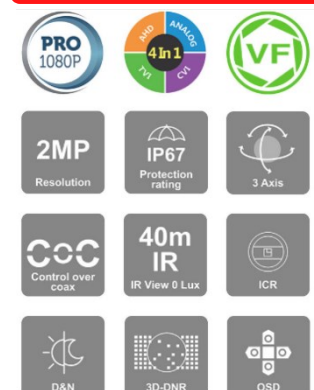

Security Superstore Shelly Beach

saleshc@securitysuperstore.co.za 072 250 7822



Camera HD- 2MP Pro series Bullet IR 20M (1 LED Array) 2.8mm Lens

Sensor	1/2.9", 2 Mega-Pixel
Selectable output	1080P/720P 4in1 (AHD / CVI / TVI / CVBS + PAL/NTSC)
Lens	2.8mm Mega-Pixel Fixed (88° Field of View)
IR Range	20M (1 Array LED)
True Day & Night	ICR
Image Enhancement	3D-DNR
IP Rate	IP67
Power	DC 12V, ~320mA
Weight	475g



I2-320A-28

SURCHD-PROB002



Camera HD- 2MP Pro series Bullet IR 30M (2LED Array) 2.8mm Lens

Sensor	1/2.9", 2 Mega-Pixel
Selectable output	2MP/1MP 4in1 (AHD / CVI / TVI / CVBS + PAL/NTSC)
Lens	2.8mm Mega-Pixel Fixed (88° Field of View)
IR Range	40M (2 Array LED)
True Day & Night	ICR
Image Enhancement	3D-DNR
IP Rate	IP67
Power	DC 12V, ~470mA
Weight	645g



I4-320A-28

SURCHD-PROB005



Security Superstore Shelly Beach

saleshc@securitysuperstore.co.za 072 250 7822



Camera HD- 2MP Pro series Bullet IR 40M (3 LED Array) 2.8-12mm Lens

Sensor	1/2.9", 2 Mega-Pixel
Selectable output	1080P/720P 4in1 (AHD / CVI / TVI / CVBS + PAL/NTSC)
Lens	2.8-12mm Vari-Focal Lens (88°-33° Field of View)
IR Range	40M (3 Array LED)
True Day & Night	ICR
Image Enhancement	3D-DNR
IP Rate	IP67
Power	DC 12V / 560mA
Weight	700g



I4-320A-VF

SURCHV-PROB002




Camera HD- 5MP Pro series Dome/Turret IR 20M (1 LED Array) 2.8mm Lens

Sensor	1/2.7", 5 Mega-Pixel
Selectable output	5MP/4MP 4in1 (AHD / CVI - Excluding 5MP / TVI / CVBS + PAL/NTSC)
Lens	2.8mm Mega-Pixel Fixed (91° Field of View)
IR Range	20M (1 Array LED)
True Day & Night	ICR
Image Enhancement	3D-DNR
IP Rate	IP67
Power	DC 12V, ~280mA
Weight	465g



DI-350A-28

SURCHD-PROD006

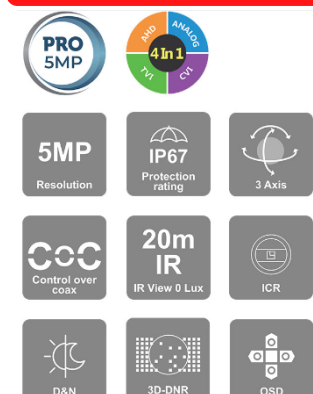

Security Superstore Shelly Beach

saleshc@securitysuperstore.co.za 072 250 7822




Camera HD- 5MP Pro Series Dome/Turret IR 40M (3 LED Array) 2.8-12mm lens

Sensor	1/2.7", 5 Mega-Pixel
Selectable output	5MP/4MP 4in1 (AHD / CVI - Excluding 5MP / TVI / CVBS + PAL/NTSC)
Lens	2.8-12mm Vari-Focal Lens (84°-32° Field of View)
IR Range	40M (3 Array LED)
True Day & Night	ICR
Image Enhancement	3D-DNR
IP Rate	IP67
Power	DC 12V, ~620mA
Weight	695g



DI-350A-VF

SURCHV-PROD001

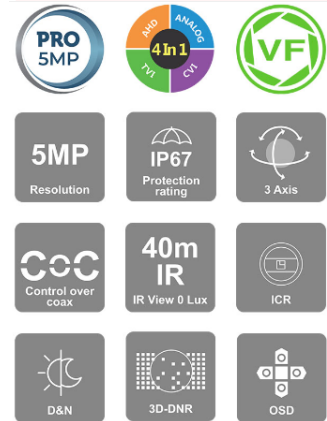


Camera HD- 5MP Pro series Bullet IR 20M (1 LED Array) 2.8mm Lens

Sensor	1/2.7", 5 Mega-Pixel
Selectable output	5MP/4MP 4in1 (AHD / CVI - Excluding 5MP / TVI / CVBS + PAL/NTSC)
Lens	2.8mm Mega-Pixel Fixed (91° Field of View)
IR Range	20M (1 Array LED)
True Day & Night	ICR
Image Enhancement	3D-DNR
IP Rate	IP66
Power	DC 12V, ~320mA
Weight	475g



I2-350A-28

SURCHD-PROB006

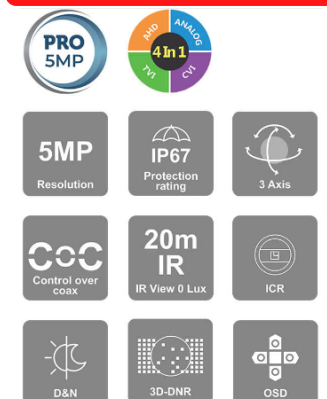

Security Superstore Shelly Beach

saleshc@securitysuperstore.co.za 072 250 7822



Camera HD- 5MP Pro Series Dome/Turret IR 40M (3 LED Array) 2.8-12mm lens

Sensor	1/2.7", 5 Mega-Pixel
Selectable output	5MP/4MP 4in1 (AHD / CVI - Excluding 5MP / TVI / CVBS + PAL/NTSC)
Lens	2.8mm Mega-Pixel Fixed (91° Field of View)
IR Range	40M (2 Array LED)
True Day & Night	ICR
Image Enhancement	3D-DNR
IP Rate	IP67
Power	DC 12V, ~470mA
Weight	645g



I4-350A-28

SURCHD-PROB007



Camera HD- 5MP Pro series Bullet IR 40M (3 LED Array) 2.8-12mm Lens

Sensor	1/2.7", 5 Mega-Pixel
Selectable output	5MP/4MP 4in1 (AHD / CVI - Excluding 5MP / TVI / CVBS + PAL/NTSC)
Lens	2.8-12mm Vari-Focal Lens (84°-32° Field of View)
IR Range	40M (2 Array LED)
True Day & Night	ICR
Image Enhancement	3D-DNR
IP Rate	IP67
Power	DC 12V, ~560mA
Weight	700g



I4-350A-VF

SURCHV-PROB003



Security Superstore Shelly Beach

saleshc@securitysuperstore.co.za 072 250 7822




Camera HD- 8MP Pro series Dome/Turret IR 20M (1 LED Array) 2.8mm Lens

Sensor	1/2.5", 8 Mega-Pixel
Selectable output	8MP/5MP/4MP 4in1 (AHD / CVI - Excluding 5MP / TVI / CVBS + PAL/NTSC)
Lens	2.8mm Mega-Pixel Fixed (89.3° Field of View)
IR Range	20M (1 Array LED)
True Day & Night	ICR
Image Enhancement	3D-DNR
IP Rate	IP67
Power	DC 12V, ~340mA
Weight	485g



DI-380A-28

SURCHD-PROD007

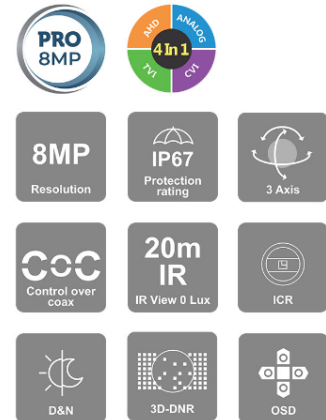

Camera HD- 8MP Pro series Bullet IR 40M (3 LED Array) 2.8-12mm Motorized Lens

Sensor	1/2.5", 8 Mega-Pixel
Selectable output	8MP/5MP/4MP 4in1 (AHD / CVI - Excluding 5MP / TVI / CVBS + PAL/NTSC)
Lens	2.8-12mm Motorized Vari-Focal Lens (83°-32° Field of View)
IR Range	40M (3 Array LED)
True Day & Night	ICR
Image Enhancement	3D-DNR
Auto Focus	Support
IP Rate	IP67
Power	DC 12V, ~710mA
Weight	700g



I4-380A-MVF

SURCHM-PROB003



Security Superstore Shelly Beach

saleshc@securitysuperstore.co.za 072 250 7822



Camera Mini PTZ Bullet 1080P X4 Zoom high speed Pan/Tilt/Zoom IR 50m distance

True Day & Night	ICR
Image Enhancement	Noise reduction (3D-DNR), WB/AGC/BLC
Preset speed	12°/Sec (max)
Preset accuracy	up to 0.1°
Pan	250° Pan Rotation
Tilt	65° Tilt
Zoom	x4 Optical zoom
Preset position	Support
OSD Menu	Support
CoC	Support
IP Rate	IP66



I5PT-390AX4

SURCHD-PROP002



Camera Mini PTZ Bullet 1080P X10 Zoom high speed Pan/Tilt/Zoom IR 50m distance

True Day & Night	ICR
Image Enhancement	Noise reduction (3D-DNR), WB/AGC/BLC
Preset speed	12°/Sec (max)
Preset accuracy	up to 0.1°
Pan	250° Pan Rotation
Tilt	65° Tilt
Zoom	x10 Optical zoom
Preset position	Support
OSD Menu	Support
CoC	Support
IP Rate	IP66



I5PT-390AX10

SURCHD-PROP003



Security Superstore Shelly Beach

saleshc@securitysuperstore.co.za 072 250 7822



Camera ULTRA-Z PTZ Dome 1080P 10X high speed Pan/Tilt/Zoom with IR

True Day & Night	ICR
Image Enhancement	Noise reduction (3D-DNR), WB/AGC/BLC
Preset speed	200°/Sec/tilt speed of 30°
Preset accuracy	up to 0.1°
Pan	Endless Pan Rotation 360°
Tilt	Continuously Tilt with Auto flip 180°
Zoom	x10 Optical zoom
Preset position	Preset position, cruise, pattern and auto scan
OSD Menu	Support
CoC	Support
IP Rate	IP66
Power	DC12V / 1.5A



MZ-10A-2(1R)

SURCHD-PROP001



Camera ECO PTZ Dome 1080P 20X high speed Pan/Tilt/Zoom IR 100m distance with 220V Power

Video Output	"4 in 1" - AHD/CVI/TVI 2MP (1920x1080) Analog 700TVL
IR Range	100m Intelligent IR LED Array
True Day & Night	ICR
Image Enhancement	Noise reduction (3D-DNR), WB/AGC/BLC
Preset speed	60°/Sec (max)
Preset accuracy	up to 0.1°
Pan	Endless Pan Rotation 360°
Tilt	Continuously Tilt with Auto flip 180°
Zoom	x20 Optical zoom
Preset position	Preset position, cruise, pattern, and auto scan
OSD Menu	Support
CoC	Support
Masking	Support
IP Rate	IP66
Power	DC12V/1.6A



ZE-20A-2(1R)

SURCHD-PROP004



Security Superstore Shelly Beach

saleshc@securitysuperstore.co.za 072 250 7822



Camera PRO PTZ Dome 1080P 20X high speed Pan/Tilt/Zoom IR 100m distance with 220V Power

Video Output	"4 in 1" - AHD/CVI/TVI 2MP (1920x1080) Analog 700TVL
IR Range	100m Intelligent IR LED Array
True Day & Night	ICR
Image Enhancement	Noise reduction (3D-DNR), WB/AGC/BLC
Preset speed	350°/Sec (max)
Preset accuracy	up to 0.1°
Pan	Endless Pan Rotation 360°
Tilt	Continuously Tilt with Auto flip 180°
Zoom	x20 Optical zoom
Preset position	Preset position, cruise, pattern and auto scan
Alarm	1 Input / 1 Output
OSD Menu	Support
CoC	Support
IP Rate	IP66
Power	24VAC/3A



ZP-20A-2(IR)

SURCHD-PROP005



Security Superstore Shelly Beach

saleshc@securitysuperstore.co.za 072 250 7822



Vari-Focal F1.5 CS mount 1/1.8" P-IRIS 3.6mm-10mm 6MP lens

Details

6 Mega-Pixel Lens
Auto Iris Lens
3.6-10mm Vari-Focal



03610DCMP-6

SURZSU-PRO003

Vari-Focal DC Auto Iris 2.8-12mm 3MP lens

Details

3 Mega-Pixel Lens
Auto Iris Lens
2.8~12mm Vari-Focal
Suitable for 1/2.9" Sensors



02812DCMP-3

SURZSU-PRO002

Security Superstore Shelly Beach

saleshc@securitysuperstore.co.za 072 250 7822



Monitor 10.1 inch Standalone LCD with IP5 panel HDMI & VGA White shell

Details

Screen Size: 10" TFT Screen
Resolution: 1024x600
TV System: PAL / NTSC
Power Supply: DC 12V, 1A
Video Input: 1VP-P, 75Ohm
Inputs: AV1, AV2, VGA, HDMI, Power
Work Temperature: -10°C ~ 60°C
Viewing Angle: 85° (All Directions)
Contrast Ratio: 300:01:00
Brightness: 350CD/m2
Weight: 1.2Kg
Dimension: 250W x 163H x 16D mm



PR-IPS10-W

SURMON-PRO004

Tester 4.3 inch AHD/TVI/CVI/CVBS with RS485 up to 8MP with EU & US socket

Details

4.3" TFT LCD Display
8MP 4 in 1 support: AHD / CVI /TVI / CVBS
CoC Support
Image settings support
Installation without external Power Source:
12VDC Ouput (Plug Supplied)
5VDC Output (Micro USB Plug Supplied)
Network Cable Tester Included
Audio in with Built-in Speaker
PAL/NTSC Support
Status LED Indicators
Built-In Long-Life Rechargeable Battery
Hands Free Operation (Arm strap supplied)
Light Weight



TM-434In1-8

TOOCCT-PRO01268



Security Superstore Shelly Beach

saleshc@securitysuperstore.co.za 072 250 7822



Power supply Provision ISR 12V 20A Professional Rack mountable for 16CH

Details

- High efficiency and environmental friendly design
- Optimal design for easy installation
- Stable power signal to support clear images
- Over-current protection
- "Over-voltage" output protection
- Short circuit protection
- Lock
- Individual Status LED for each Channel
- Thermal Fuses



PR-20A16CH(1U)

POWDPS-PRO018

Power supply Professional 9CH 12V/10A with socket

Details

- High efficiency and environmental friendly design
- Optimal design for easy installation
- Stable power signal to support clear images
- Over-current protection
- "Over-voltage" output protection
- Short circuit protection
- Lock
- Individual Status LED for each Channel
- Thermal Fuses



PR-10A9CH+

POWDPS-PRO001

Security Superstore Shelly Beach

saleshc@securitysuperstore.co.za 072 250 7822



Power supply Professional 9CH 12V/10A with room for backup battery with socket

Details

High efficiency and environmental friendly design
Optimal design for easy installation
Stable power signal to support clear images
Over-current protection
"Over-voltage" output protection
Short circuit protection
Lock
Individual Status LED for each Channel
Thermal Fuses
Backup Battery Support (Backup Battery not included)



PR-10A9CH-B

POWDPS-PRO017

Power supply Professional 16CH 2V/12A with socket

Details

High efficiency and environmentally friendly design
Optimal design for easy installation
Stable power signal to support clear images
Over-current protection
"Over-voltage" output protection
Short circuit protection
Lock
Individual Status LED for each Channel
Thermal Fuses
DC12V/12A



PR-12A16CH+

POWDPS-PRO002

Security Superstore Shelly Beach

saleshc@securitysuperstore.co.za 072 250 7822



Power supply DC 12V 5A with 4 channel terminal block

Details

12V 5A power supply - 4 DC Terminals.
High efficiency and environmental friendly design
Optimal design for easy installation
Stable power signal to support clear images
Full AC Input range: AC100~240V
Output Voltage: DC12V±5%
Over-current protection
Short circuit protection
Auto Recovery



PR-12V5A-4T

POWDPS-016

Power Supply 12V 3A

Details

12V 3A power supply - 1 DC Plug.
High efficiency and environmental friendly design
Optimal design for easy installation
Stable power signal to support clear images
Full AC Input range: AC100~240V
Output Voltage: DC12V±5%
Over-current protection
Short circuit protection
Auto Recovery



PR-12V3A

POWDPC-12V3A011

Security Superstore Shelly Beach

saleshc@securitysuperstore.co.za 072 250 7822



Junction box for I6-/DI-VF IP66

Details

Large Water-proof Junction Box
Weight: 512 g
Dimensions: 139.3x50 mm
Suitable for:
I6 New Bullet Camera (All Models)
DAI-VF New Dome Anti-Vandal Camera (All Models)
DI-VF New Turret Dome Camera (All Models)



PR-JB14IP66

SURZSU-PRO015

Junction box for I4-/I2-/DI-Fix IP66

Details

Small Water-proof Junction Box
Weight: 380 g
Dimensions: 117.9x47 mm
Suitable for:
I4 New Bullet Camera (All Models)
I2 New Bullet Camera (All Models)
DAI-Fixed Lens New Dome Anti-Vandal Camera (All Models)
DI-Fixed Lens New Turret Dome Camera (All Models)



PR-JB12IP66

SURZSU-PRO014

Junction Box Small

Details

Suitable for:
Bullet Camera with Fixed Lens
Eyeball camera with Fixed Lens



PR-B37JB

SURZSU-PRO005

Security Superstore Shelly Beach

saleshc@securitysuperstore.co.za 072 250 7822



Junction Box Small Plastic for AHD cameras

Details

Suitable for:
Bullet camera with fixed lens
Eyeball camera with fixed lens
Bullet camera with fixed lens



PR-B42PJB

SURZSU-PRO007

Junction Box Waterproof for IP models I4/I5/I8/DI for AHD models DI VF lens

Details

Suitable for:
Eyeball camera with VF lens
Bullet Camera with VF/MVF lens
Eyeball camera with VF lens



PR-B55JB

SURZSU-PRO009

BNC Plug 3Pcs

Details

BNC plug (one set with three pcs) for ratchet BNC cramping tool.



PR-C13

CABBNC-001

Security Superstore Shelly Beach

saleshc@securitysuperstore.co.za 072 250 7822



BNC Male to RCA Female

Details

BNC male to RCA female.



PR-C01

CABBNC-013

BNC T connector - BNC Female to 2 BNC Female

Details

T conector- BNC female to 2 BNC female.



PR-C02

CABBNC-006

BNC T connector - BNC Male to 2 BNC Female

Details

T Conector- BNC male to 2 BNC female.



PR-C03

CABBNC-007

Security Superstore Shelly Beach

saleshc@securitysuperstore.co.za 072 250 7822



BNC Female to BNC Female

Details

BNC female to BNC female



PR-C07

CABBNC-008

BNC Female to RCA Male

Details

BNC female to RCA male.



PR-C04

CABBNC-014

DC Jack Male

Details

DC jack male.



PR-C08

CABDCJ-002

Security Superstore Shelly Beach

saleshc@securitysuperstore.co.za 072 250 7822



DC Jack Female

Details

DC jack female..



PR-C09

CABDCJ-004

DC Cable (25 cm length)

Details

DC cable (25 cm length).



PR-C10

CABDCJ-001

DC Cable Female (15 cm)

Details

DC cable female (15 cm).



PR-C11

CABDCJ-003

Security Superstore Shelly Beach

saleshc@securitysuperstore.co.za 072 250 7822



1 CH HD Passive Video Balun Set 8MP

Details

Passive transmission - No power required
8MP 4in1 support: AHD / CVI / TVI / CVBS.
Transmission Distance: AHD / CVBS - 200M / CVI / TVI - 150M.
Friendly "Tool Free" Terminal Connector
Built-in TVS for Surge Protection
Anti Static Design
Wave Filter Design
Designed for Cat.5e/6 Cables



PTR-101V-HD-8

CABBAL-011

1 CH Passive Balun HD Video And Power 8MP

Details

Input: 1Ch BNC + 12VDC Power
Output: 1Ch BNC + 12VDC Power
System Format: PAL / NTSC
Input Resolution Support: 8MP and Lower
Input Signal Support: 4 in 1 (AHD / CVI / TVI / CVBS)
8MP Transmission Distance (Based on input signal):
- AHD 200m
- TVI 150m
- CVI 150m
- CVBS 200m
Transmission Distance (Based on Power Consumption):
- 200mA 180m
- 300mA 120m
- 400mA 100m
- 500mA 80m
- 600mA 60m
Attenuation: 1.5db Max
Wiring: Cat5/5e/6 crimped cable (RJ-45)
Surge Protection: 2KV
Work Environment: -20°C-70°C, 0%-90% Humidity
Power Source: Not Required (Passive Unit). Power is required for powered device only.
Dimensions: Camera/DVR Side - 73x29x20mm + 113mm Wire
Net Weight: 60g



PTR-102VP-HD-8

CABBAL-015

Security Superstore Shelly Beach

saleshc@securitysuperstore.co.za 072 250 7822



USB ALARM EXPANSION BOX 16CH ALARM INPUT 6CH ALARM OUTPUT

Details

6 Alarm Inputs (Dry Contact)
6 Alarm Output (Dry Contact)
USB Interface
Power LED Indicator



I/O-1606

SURZSU-PRO019

Active Horn Speaker 30W 12V-24V with 3.5mm stereo male sound input Vol control

Details

Total Distortion: 5% Max at 1KHz 1W
Resonance Frequency: $700 \pm 15\%$ Hz at 1V, 25 °C
Rated Frequency Range: 300Hz ~ 5.5K Hz (-20dB band)
Sound Pressure Level: 112 ± 3 dB 1w/m @ 1K Hz
Rated Impedance: ACR 8 Ohm
Work Environment: Temperature -20°C~+40°C, Humidity 45%~85%
Dimensions: 285(W) × 205(H)× 280(L)mm
Weight: 2.1kg ± 10%
Power Input: 12VDC/2A



PR-HS30W

SURZSU-PRO020

Security Superstore Shelly Beach

saleshc@securitysuperstore.co.za 072 250 7822



Wall pendant mount bracket for PTZ

Details Suitable for: New PTZ Line



PR-WB-Z

SURZSU-PRO018

Security Superstore Shelly Beach

saleshc@securitysuperstore.co.za 072 250 7822

