



Indoor Architectural Products

Classic and Rustic Collection (cont.)

Strap Ties


Model No.	Ga.	Dimensions (in.)		Bolts		DF/SP/SPF/HF Allowable Loads	Code Ref.
		W	L	Qty.	Dia.	Tension/Uplift (160)	
OS	12	2	12	4	½"	1,565	—
OHS	7	2½	12	4	⅝"	2,015	
OHS135	7	6	13½	4	¾"	5,045	
OHS195	7	6	19½	8	¾"	10,085	



1. Allowable loads have been increased for wind or earthquake loading with no further increase allowed. Reduce where other loads govern.
2. Allowable loads are based on parallel-to-grain loading and a minimum member thickness of 3 ½", with bolts in single shear. Straps must be centered at the splice joint, and bolt edge distances must meet NDS minimum requirements.
3. Designer must determine allowable loads when combining bolts parallel and perpendicular to grain.

Joist Hangers

Model No.	Ga.	Dimensions (in.)		Bolts		DF/SP Allowable Loads			Code Ref.
		W	H	Header	Joist	Uplift (160)	Floor (100)	Roof (125)	
OU46	7	3¾	5	(2) ¾	(1) ¾	685	1,255	1,560	—
OU48	7	3¾	7	(4) ¾	(2) ¾	1,365	2,510	3,120	
OU410	7	3¾	9	(4) ¾	(2) ¾	1,365	2,510	3,120	
OU412	7	3¾	11	(6) ¾	(3) ¾	2,050	3,770	4,680	
OU414	7	3¾	13	(6) ¾	(3) ¾	2,050	3,770	4,680	
OU68	7	5½	7	(4) ¾	(2) ¾	1,365	2,510	3,120	
OU610	7	5½	9	(4) ¾	(2) ¾	1,365	2,510	3,120	
OU612	7	5½	11	(6) ¾	(3) ¾	2,050	3,770	4,680	
OU614	7	5½	13	(6) ¾	(3) ¾	2,050	3,770	4,680	
OU810	7	7½	9	(4) ¾	(2) ¾	1,365	2,510	3,120	
OU812	7	7½	11	(6) ¾	(3) ¾	2,050	3,770	4,680	
OU814	7	7½	13	(6) ¾	(3) ¾	2,050	3,770	4,680	

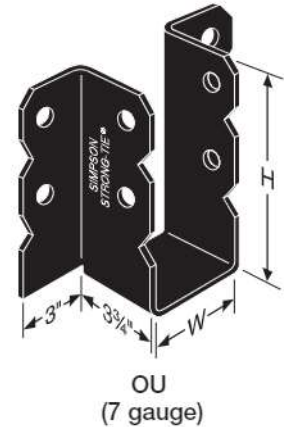

1. Load values allowed assume a carrying member of not less than 3 ½".
2. Roof loads are 125% of floor loads unless limited by other criteria. Floor loads may be adjusted for load durations according to the code provided they do not exceed those in the roof column.
3. Additional glulam beam widths are available. Add an "X" to the name and specify width — e.g., OU68X, W = 5.25.
4. Skew and slope options are not available.