



## 15N-RM-WH 15.6" ANDROID TERMINAL

### 15.6" ANDROID POS SYSTEM

*15" All in One Fanless Terminal*

The TEAMSable 15N-RM-WH Android POS terminal is the newest addition to our innovative line of advanced Android based POS products. The 15N-RM-WH comes loaded with features wrapped up in a modern, stylish housing that is sure to complement any POS system install. Its 1080P high resolution PCAP touchscreen offers best-in-class performance, and at its heart is a blazing fast A17, Quad Core 1.8GHz CPU that can easily handle the most demanding applications. The 15N-RM-WH is a smart choice for a cost-effective, high performance POS terminal that adds value and superior functionality to any business.



Slim  
Fanless Design



Cable-Free  
Management



[www.teamsable.com](http://www.teamsable.com)

1911 Hartog Dr. San Jose, CA 95131




1-408-452-8788



[sales@teamresearchinc.com](mailto:sales@teamresearchinc.com)

# 15N-RM-WH Terminal

- 15.6" LED Panel
- A17, Quad Core CPU Fanless Architecture
- 1080P PCAP Zero Bezel Touchscreen
- Splash Resistant Screen
- Optional Integrated Scanner & MSR Available
- 2 Year Warranty with Free Tech Support

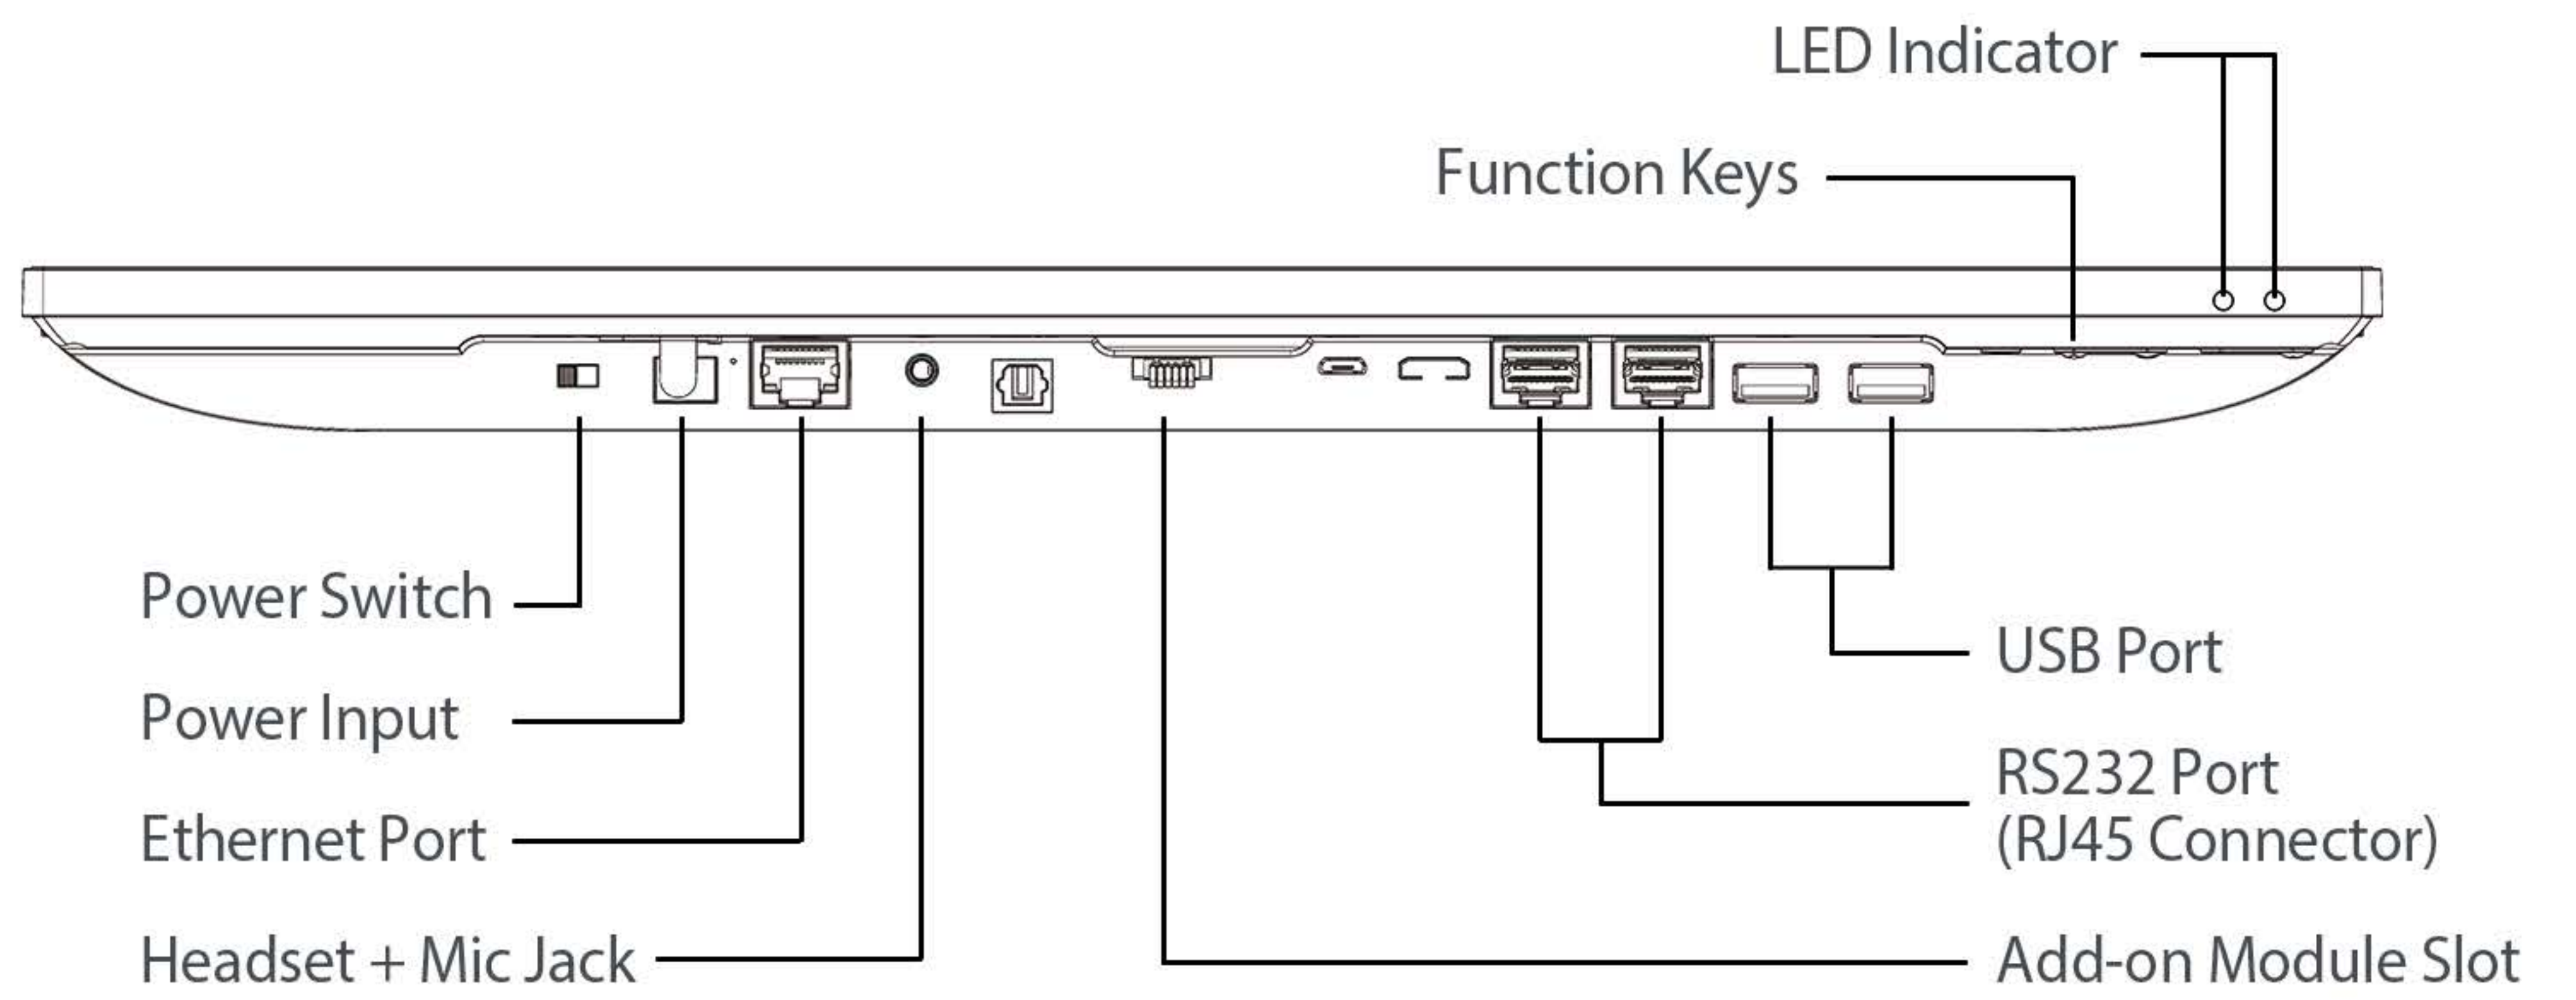

15N-RM	
<b>Hardware</b>	
Display	15.6" IPS FHD LED Panel
Resolution	1920x1080 (16:9 diagonal)
Touch Technology	10 Point Capacitive
CPU	Cortex A17, QuadCore 1.8GHz
Memory	2GB DDR3 SDRAM
Internal Storage	8GB eMMC (up to 32GB)
External Storage	SD Card (SDHC Class 10 Compatible)
Power Supply	12V/2A AC/DC Adapter
OS Support	Android 6.0 Marshmallow
Wifi	802.11 b/g/n/ac
Bluetooth	BT 4.2
<b>External Ports</b>	
USB	USB 2.0 Type A x 5 ( 3 of them shared with add-on module slots)
Micro USB	Micro USB 2.0 OTG x 1
Com	RS232 x 2 (in RJ45 connector form)
Ethernet	10/100/1000 Mbps LAN RJ45 x 1
Audio I/O	Headset + Microphone Jack x 1
Camera	Front facing 2M pixels (optional)
<b>Optional Peripherals</b>	
MSR	Available
<b>Environment</b>	
Operating Temperature	0 - 35 C° (32 - 94 F°)
Storage Temperature	-10 - 55 C° (14 - 131 F°)
Relative Humidity	10% - 90% (Non-Condensing)
Certification	CE, FCC, RoHS, ISO 9002
<b>Package</b>	
Dimension	15.24" (W) x 9.46" (H) x 1.05" (D)
Weight	2.5 lbs (excluding AC adapter)