




Guard Mounted Fan Specifications

8" - 36"

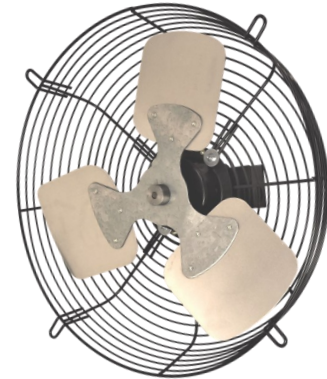

Fan Certifications: UL, cUL 705

Motor Certifications/Ratings: CE, UL recognized US & Canada, IP55

Motor: TEAO, thermally protected, ball bearings

Guard: Gray polyester powder coated, OSHA spacing

Performance/Specifications

Model:	High CFM	Area Cov. Sq Ft	Prop Dia.	Motor HP	Ph	Hz	Volts	High Amps	Watts (0.0" SP)	Spd	High RPM	Sones @ 5ft	Pre-wired 9ft Cord	Rough-In (Dia.)
8GM	360	540	8"	1/25	1	60	115	.6	44.0	Var. Cap.	1550	5.37	No	8.50"
8GM-TH	360	540	8"	1/25	1	60	115	.6	44.0	Var. Cap.	1550	5.37	No	8.50"
10GM	770	1155	10"	1/25	1	60	115	.6	53.0	Var. Cap.	1550	6.19	No	10.50"
10GM-TH	770	1155	10"	1/25	1	60	115	.6	53.0	Var. Cap.	1550	6.19	No	10.50"
12GM	1100	1650	12"	1/15	1	60	115	1.0	65.0	Var. Cap.	1550	6.00	No	12.50"
12GM-TH	1100	1650	12"	1/15	1	60	115	1.0	65.0	Var. Cap.	1550	6.00	No	12.50"
14GM	1600	2400	14"	1/10	1	60	115	1.1	91.0	Var. Cap.	1550	6.41	No	14.50"
14GM-TH	1600	2400	14"	1/10	1	60	115	1.1	91.0	Var. Cap.	1550	6.41	No	14.50"
16GM	1700	2550	16"	1/10	1	60	115	1.1	99.0	Var. Cap.	1550	6.39	No	16.50"
16GM-TH	1700	2550	16"	1/10	1	60	115	1.1	99.0	Var. Cap.	1550	6.39	No	16.50"
18GM	2000	3000	18"	1/10	1	60	115	1.1	115.0	Var. Cap.	1075	7.40	No	18.50"
18GM-TH	2000	3000	18"	1/10	1	60	115	1.1	115.0	Var. Cap.	1075	7.40	No	18.50"
20GM	3700	5500	20"	1/4	1	60	115	2.8	298.0	Var. Cap.	1550	7.01	No	20.50"
20GM-TH	3700	5500	20"	1/4	1	60	115	2.8	298.0	Var. Cap.	1550	7.01	No	20.50"
24GM	4600	6500	24"	1/3	1	60	115	3.0	327.0	Var. Cap.	1075	7.00	No	24.50"
24GM-TH	4600	6500	24"	1/3	1	60	115	3.0	327.0	Var. Cap.	1075	7.00	No	24.50"
30GM	6700	9000	30"	1/3	1	60	115	3.8	351.0	1	825	7.01	No	30.50"
36GM	9600	12500	36"	1/2	1	60	115	5.6	554.0	1	825	8.24	No	30.50"



Model: TH120C	Thermostat		
	Electrical Rating		Probe Length In.
	16A	400V	48

