


Part #: 20R4BV, 24R4BV, 30R8BN

Description: Circulation fan, black, OSHA spaced guards



Features:

- Motors
 - TEAO(IP55 rating)
 - Permanently sealed ball bearings
 - Permanent split capacitor
 - Class B insulation
 - Automatic thermal overload protection
 - UL recognized in US & Canada
- Universal ceiling/wall mount included
- Black, powder coated OSHA guards for maximum protection
- 30" fan ships unassembled —1 set per box for freight savings

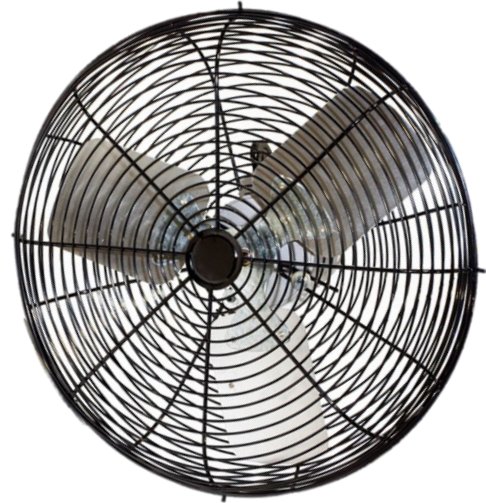

Performance/Specs:

Model #	Blade Dia.	HP	Spd	CFM	RPM	Volts	Amps	Ph	Hz	Shaft Dia.	Decibels @ 7ft	Mount Type	Guard Color	Guard Spacing
20R4BV	20"	1/3	Var.	4300	1725	115/230	3.2/1.6	1	60	1/2"	63	2 pc	Black	OSHA
24R4BV	24"	1/2	Var.	5850	1725	115/230	4.4/2.2	1	60	5/8"	64	2 pc	Black	OSHA
30R8BN	30"	1/2	1	7250	825	115/230	5.2/2.6	1	60	5/8"	59	2 pc	Black	OSHA

Shipping Info:

Model #	Boxed Dims	Boxed Weight	Pallet Qty	Pallet Dims	Pallet Weight	Dim A	Dim B	Dim C	How Shipped
20R4BV	24"x24"x15"	33 lbs	24	48"x48"x95"	832 lbs	14"	6"	24"	Assembled
24R4BV	29"x29"x16"	45 lbs	20	60"x60"x69"	940 lbs	15"	6"	27"	Assembled
30R8BN	34"x34"x7"	48 lbs	10	40"x40"x84"	520 lbs	15"	6"	33"	Unassembled

Mount Detail: Used for both ceiling or wall mounting option

