

Part #: 12VT4WV, 20VT4WV, 24VT4WV,
12VT4GV, 20VT4GV



Description: Circulation fan, deep tapered, variable speed

Features:

- Guards white powder coated. 1" spacing on front and back for increased air throw. Side guard spacing is 1/2".
- OSHA requires fans are mounted at least 7ft from working surfaces.
- "G" models feature hot dipped galv coating on guards

• Motors



- TEAO(IP55 rating)
- Permanently sealed ball bearings
- Permanent split capacitor
- Class B insulation
- Automatic thermal overload protection
- UL recognized in US & Canada




Performance/Specs:

Model #	Blade Dia.	HP	Spd	CFM	RPM	Volts	Amps	Ph	Hz	Shaft Dia.	Guard Finish	Decibels @ 7ft
12VT4WV	12"	1/10	Var.	1635	1700	115/230	1.0/.5	1	60	1/2	White powder coated	59
20VT4WV	20"	1/3	Var.	5510	1725	115/230	3.5/1.7	1	60	1/2	White powder coated	64
24VT4WV	24"	1/2	Var.	7760	1725	115/230	4.8/2.4	1	60	5/8	White powder coated	64
12VT4GV	12"	1/10	Var.	1635	1700	115/230	1.0/.5	1	60	1/2	Hot dip galvanized	59
20VT4GV	20"	1/3	Var.	5510	1725	115/230	3.5/1.7	1	60	1/2	Hot dip galvanized	64

Shipping Info:

Model #	Boxed Dims	Boxed Weight	Pallet Qtys	Pallet Dims	Pallet Weight	Dim A	Dim B
12VT4WV	16x16x16	20	45	48x52x85	940	14	15.5
20VT4WV	24x24x15	37	20	48x48x84	760	15	23.5
24VT4WV	29x29x16.5	48	20	60x60x78	1000	16	27.5
12VT4GV	16x16x16	20	45	48x52x85	940	14	15.5
20VT4GV	24x24x15	37	20	48x48x84	760	15	23.5

Mount Detail:

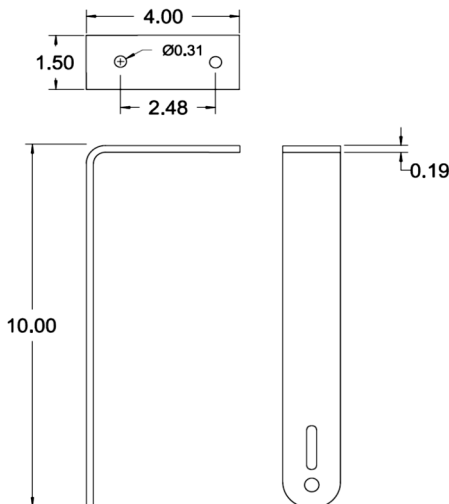

Wiring Diagram:

