

Color Cues




BULLSEYE

GLASS CO.

Dusk



1409 LIGHT BRONZE



0034 LIGHT PEACH CREAM

Color Kicker:



1428 LIGHT VIOLET



1429 LIGHT SILVER GRAY



0303 DUSTY LILAC

See the other side of this sheet for a simple way to double this color palette!

A palette of warm neutrals, as restful as evening's approach, this muted selection of opal and transparent glass is stable and dependable. Most of these colors will stay pretty true after firing. Light bronze in the cold sheet? Light bronze once fired.

Want some sparkle? Add a metallic accent. The Light Silver Gray, Bronze and Violet glasses are all available with an iridescent coating.

Still more choices

We've used the thin, 1.6mm, glass for the color parts of our Kicker tile, but for additional variations in saturation, consider using more 3mm glass.

For texture and surface interest, you might include frits, stringers and confetti in your designs. See what's available in the chart below:



Single-rolled, 3mm
Double-rolled, 3mm
Thin, 1.6mm
Frit and powder
Confetti
Stringer
Rod
Irid coating

	Single-rolled, 3mm	Double-rolled, 3mm	Thin, 1.6mm	Frit and powder	Confetti	Stringer	Rod	Irid coating
1409 LIGHT BRONZE	●	●	●	●	●	●	●	●
0034 LT PEACH CREAM	●	●	●	●	●	●	●	●
1429 LT SILVER GRAY	●	●	●	●	●	●	●	●
0303 DUSTY LILAC	●	●	●	●	●	●	●	●
1428 LT VIOLET	●	●	●	●	●	●	●	●

For detailed product listings and item numbers refer to our product catalog.

A color series for kiln workers



CONNECTIONS
A Glassworking System

Explore these combinations side by side or in layers.
 Make overlay sample tiles to fine tune color combinations.
 Use these color studies to inspire new directions in your work.

Color Kicker:



1428 LIGHT VIOLET



This one's a soft KICKER. A gentle violet, 1428, when layered over your other colors will mute and harmonize them.

If you start to snooze off, add an accent of black to this palette and awaken the sophisticate.


DUSK is a palette that transitions easily from end-of-day ease to nighttime energy.

The tile lay-up

We created our tile using 3 layers of Bullseye Compatible glass:

- A base of thin (-50) colors and clear
- A center layer of thin (-50) color and clear
- A top solid layer of standard clear 1101-30

This total thickness (6.2mm) should not flow out or shrink appreciably when fired to a full fuse. If you are stacking higher, use dams to maintain your original footprint.

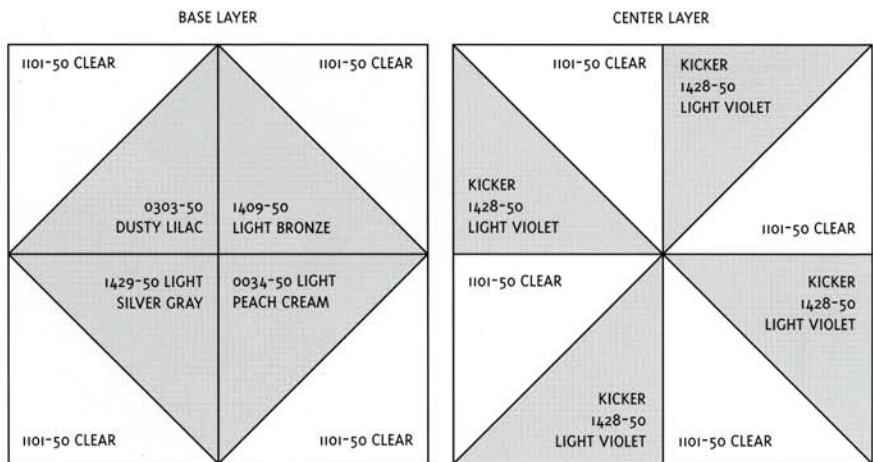

For additional technical information and Bullseye product catalog, contact the Bullseye Resource Center, toll free: 888-220-3002 or 503-227-2797 or email: resourcecenter@bullseyeglass.com