
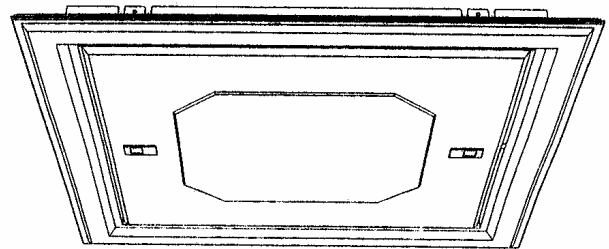


Push Up Loft Access Door

CODE **GL260**

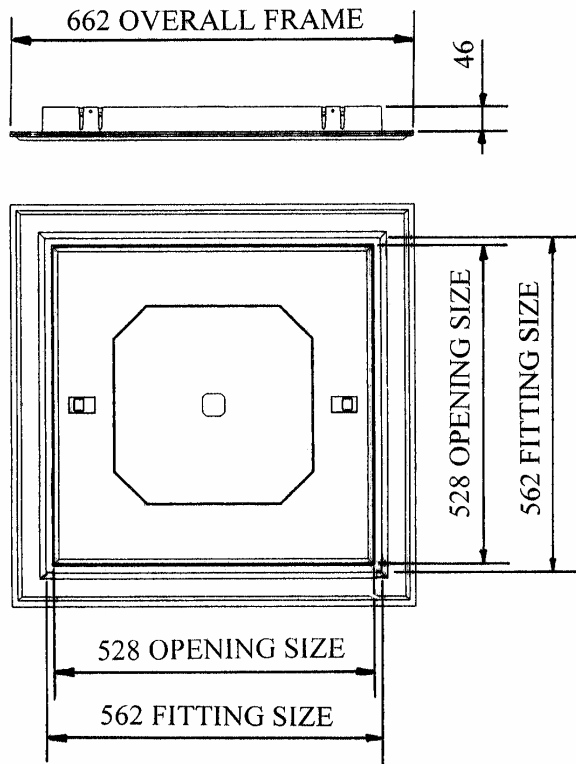

Operating Instructions:

To open the door, simply pull the two locking catches in towards the centre of the door to release from the frame. Push the door upwards into the loft space and place to one side for unrestricted access alternatively the door can be totally removed if required.

To replace the door position over the opening ensuring the catches are in line with the locking apertures in the frame. With the catches still pushed into the centre of the door allow the door to be lowered back into the frame. Check the door is correctly positioned and aligned in the frame and push the locking catches outwards to lock the door into position as shown.

COLOURS	White Textured Finish
PACKING DETAILS	Individual cardboard box with internal polythene bag to protect product.
WEIGHT	2.8kg per pack
MATERIAL DOOR & FRAME	High Impact Polystyrene
COMPRESSION SEAL (DOOR)	Closed Cell P.V.C
COMPRESSION SEAL (FRAME)	Open Cell Polyurethane
INSULATION	Expanded Polystyrene
FIXING SCREWS & BRACKETS	Zinc Plated Mild Steel
MANUFACTURING PROCESS	Injection Molded
U VALUE	0.86 W/M ² K

Environmental Assessment

Expanded Polystyrene Insulation used in the GL260 Has a Global Warming Potential (GWP) of less than 5 and is CFC/HCFC-free with zero Ozone Depletion Potential (ODP)

MANTHORPE BUILDING PRODUCTS LTD
MANTHORPE HOUSE
BRITAIN DRIVE
CODNOR GATE BUSINESS PARK
RIPLEY
DERBYSHIRE DE5 3ND

TEL: 01773 303 000
FAX: 01773 303 300
EMAIL:
mbp.care@manthorpebp.co.uk
WEB:
www.manthorpebp.co.uk

DRN M.L.W.O Date 20.06.19

The company maintains a policy of continuous development of its product range and reserves the right to amend the specification without notice.

DRG No

MBP 8030

Issue

B