
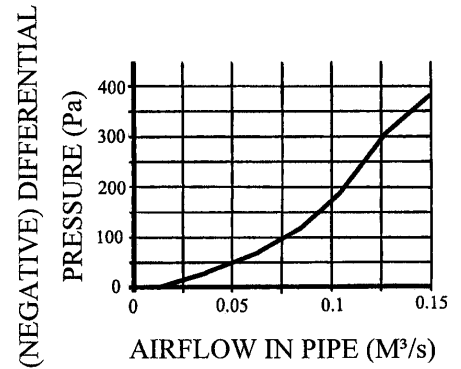
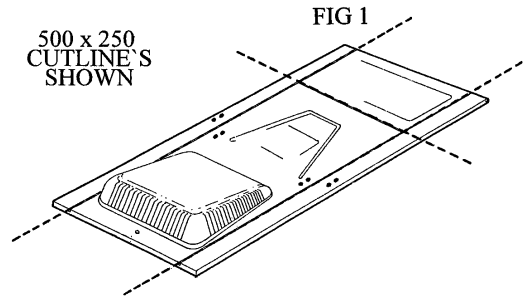


Slate Vent General Fitting

CODE GRSV 30/25
GRSV 30/25R

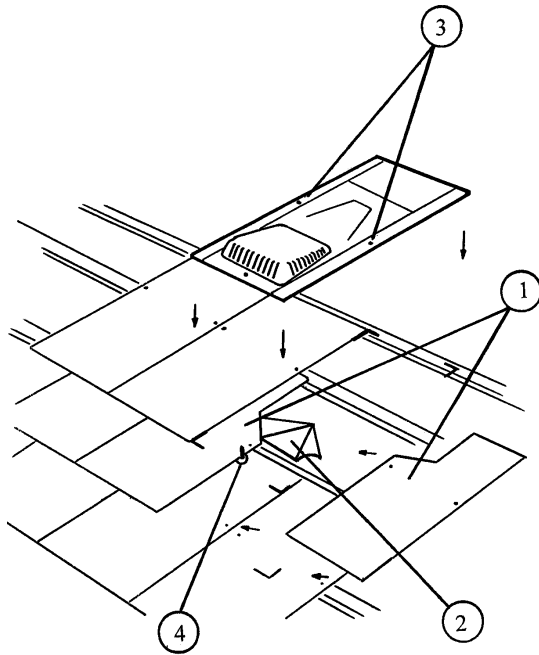

Fitting Instructions:

The GRSV30/25 or GRSV30/25R slate vents take the place of one standard slate.

For 500 x 250 slates trim slate vent along marked lines (fig1).

- 1) Cut the two slates directly below the slate vent as shown.
- 2) Cut an inverted "T" in the felt and fold back as shown.
- 3) Fix slate vent into position using holes provided.
- 4) Secure front of slate using a copper disc rivet. A GRPA Flexible Pipe is available for connection to the GRSV30/25 Slate Vent Spigot.

Slate Vent Airflow Characteristics:

Airflow m³/s	Differential airflow pressure (Pa)
0.037	28
0.060	64
0.083	122
0.109	190
0.130	310

PRODUCT CODE	TO ACHIEVE 5mm² FREE AIR FLOW THE VENT NEEDS TO BE FITTED AT CENTRES	TO ACHIEVE 10mm² FREE AIR FLOW THE VENT NEEDS TO BE FITTED AT CENTRES	TO ACHIEVE 25mm² FREE AIR FLOW THE VENT NEEDS TO BE FITTED AT CENTRES
GRSV 30/25	2m	1m	400mm
GRSV 30/25	2m	1m	400mm

MANTHORPE BUILDING PRODUCTS LTD MANTHORPE HOUSE BRITAIN DRIVE CODNOR GATE BUSINESS PARK RIPLEY DERBYSHIRE DE5 3ND

TEL: 01773 303 000
FAX: 01773 303 300
EMAIL: mbp.care@manthorpebp.co.uk
WEB: www.manthorpebp.co.uk

DRN M.L.W.O Date 21.06.19

The company maintains a policy of continuous development of its product range and reserves the right to amend the specification without notice.

DRG No Issue

MBP 8083 **B**