



Technical data

Voltage	U	230	V
Phase	1	~	
Frequency	f	50	Hz
Speed	n	905	RPM
Power consumption	P _e	420	W
Nominal current	I _{nom}	2.1	A
Maximum current	I _{max}	2.9	A
Cos φ		0.85	
Capacitor		10/400	μF/V
Service factor current		2.9	A
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CLF	
IP Class Fan		IP55	
Weight		19.4	kg
Packing dimensions		720x720x400	mm

Fan details


Impeller blades	3
Impeller type	5
Impeller system	G
Impeller material	PG

Control options

Triac controller	Yes
Transformer	Yes
Frequency drive	No
Intelligent Fan Drive	Yes

Characteristics

0 Pa	9350 m ³ /h
------	------------------------




Please note: Picture may deviate from original product

Approval(s)

Wiring diagram

BA11 - 1 Phase - Standard Dual High Voltage ST061816 - CCW

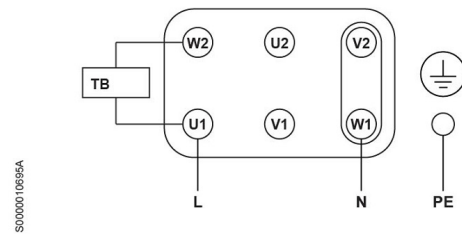

Article number: K6E6320M11100

Basket fans

Dimensions

A01:	610 mm
A03:	683 mm
A13:	206 mm
A14:	350 mm
A29:	32 mm
A30:	115 mm

