



Technical data

Voltage	U	230	V
Phase		1	~
Frequency	f	50	Hz
Speed	n	905	RPM
Power consumption	P _e	590	W
Nominal current	I _{nom}	3	A
Maximum current	I _{max}	3.9	A
Cos φ		0.92	
Capacitor		16/400	μF/V
Service factor current		3.9	A
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CLF	
IP Class Fan		IP55	
Sound pressure level (2 m)	L _{p (meas.)}	71	db(A)
Sound pressure level (7 m)	L _{p (calc.)}	60	db(A)
Weight		17.3	kg
Packing dimensions		720x720x400	mm

Fan details

Impeller blades	5
Impeller type	5
Impeller system	G
Impeller material	PG


Control options

Triac controller	Yes
Transformer	Yes
Intelligent Fan Drive	Yes
RFREINV7 control	Yes

* This fan is suitable for 1~ frequency control with the Invertek Optidrive type RFREINV7. This Invertek Optidrive RFREINV7 is equipped with a special Vostermans Ventilation BV parameter set. This Invertek Optidrive RFREINV7 is available from Vostermans Ventilation BV.

Characteristics

0 Pa	13600 m ³ /h
50 Pa	11300 m ³ /h

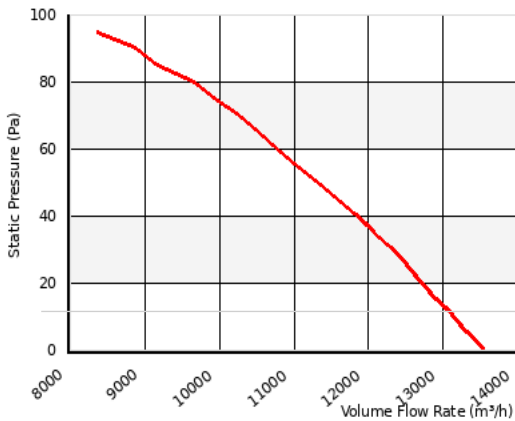


Please note: Picture may deviate from original product

Approval(s)



Wiring diagram

BA01 - 1 Phase - Standard - CCW

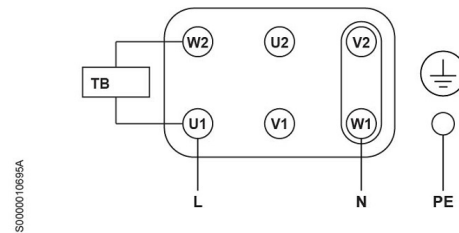

Article number: P6E71A2M11100

Tube mounting fans

Dimensions

