



Technical data

Voltage	U	230/400	V
Phase		3	~
Frequency	f	50	Hz
Speed	n	895	RPM
Power consumption	P _e	760	W
Nominal current	I _{nom}	2.6/1.5	A
Maximum current	I _{max}	2.7/1.6	A
Cos φ		0.72	
Capacitor		-	μF/V
Service factor current		2.7/1.6	A
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CLF	
IP Class Fan		IP55	
Weight		19.0	kg
Packing dimensions		720x720x400	mm

Fan details


Impeller blades	5
Impeller type	5
Impeller system	G
Impeller material	PG

Control options

Triac controller	No
Transformer	Yes
Frequency drive	Yes
Intelligent Fan Drive	Yes

Characteristics

0 Pa 15700 m³/h
 50 Pa 13300 m³/h

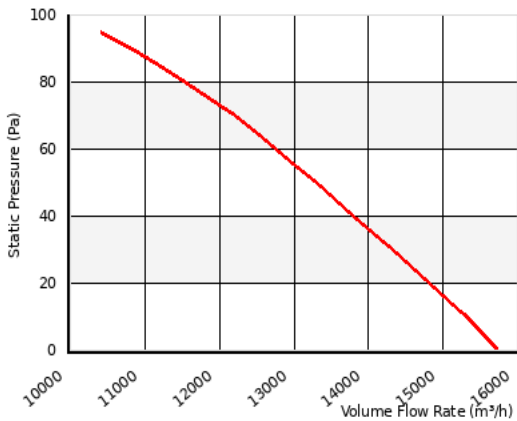


Please note: Picture may deviate from original product

Approval(s)



Wiring diagram

BB01 - 3 Phase - Y connection - CCW

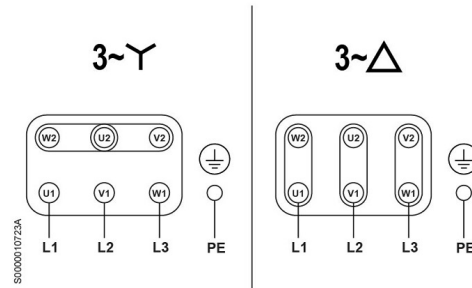

Article number: P6D71A5M11100

Tube mounting fans

Dimensions

