



Technical data

Voltage	U	230/400	V
Phase		3	~
Frequency	f	50	Hz
Speed	n	965	RPM
Power consumption	P _e	530	W
Nominal current	I _{nom}	2.3/1.3	A
Maximum current	I _{max}	2.7/1.6	A
Cos φ		0.59	
Capacitor		-	μF/V
Service factor current		2.7/1.6	A
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CLF	
IP Class Fan		IP55	
Sound pressure level (2 m)	L _p (meas.)	70	dB(A)
Sound pressure level (7 m)	L _p (calc.)	59	dB(A)
Weight		19.0	kg
Packing dimensions		720x720x400	mm

Fan details


Impeller blades	5
Impeller type	5
Impeller system	G
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	Yes
Intelligent Fan Drive	Yes

Characteristics

0 Pa	11800 m ³ /h
50 Pa	10400 m ³ /h

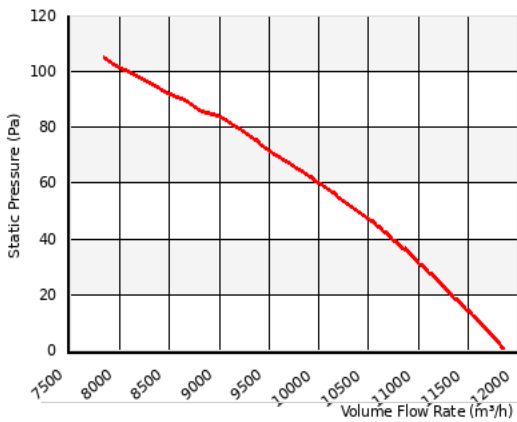


Please note: Picture may deviate from original product

Approval(s)



Wiring diagram

BB01 - 3 Phase - Y connection - CCW

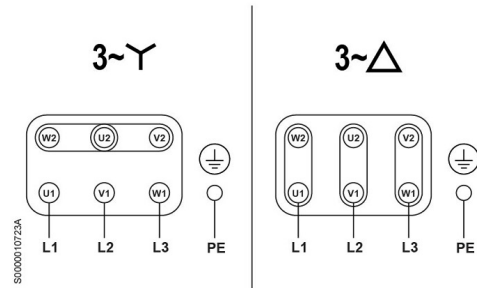

Article number: P6D63AAM11100

Tube mounting fans



Vostermans Ventilation B.V.
Venlo - The Netherlands
+31 (0)77 389 32 32
ventilation@vostermans.com

Vostermans Ventilation Inc.
Bloomington, IL - U.S.A.
+1 309 827 9798
ventilation@vostermansusa.com

Vostermans Ventilation Ltd. Co.
Shanghai - China
+86 21 5290 2889/2899
ventilation@vostermanschina.com

Vostermans Ventilation Sdn. Bhd.
Tmn Klang Jaya - Malaysia
+60 (0)33324 3638
ventilation@vostermansasia.com